

LF Series


- Low impedance for high frequency
- Life time: +105 °C 2,000 to 4,000 hours
- Suitable for switching power, UPS, power sources etc
- RoHS Compliant



● SPECIFICATIONS

Items	Characteristics										
Category	-40 to +105 °C (6.3 to 100Vdc)										
Temperature Range											
Rated Voltage Range	6.3 to 100Vdc										
Capacitance Tolerance	± 20%(M) (at 20 °C 120Hz)										
Leakage Current	$1 \leq 0.01CV$ or $3 \mu A$, whichever is greater Where, I:Max.leakage current(μA), C:Nominal capacitance (μF) V:Rated voltage(V) (at 20 °C ,after 2minutes)										
Dissipation Factor (tan δ)	Rated voltage(Vdc)	6.3	10	16	25	35	50	63	100		
	tan δ (Max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08		
	When nominal capacitance exceeds 1,000 μF add 0.02 to the value above for each 1,000 μF increase (at 20 °C 120Hz)										
Low Temperature Characteristics (Max.Impedance Ratio)	Rate Voltage(Vdc)	6.3	10	16	5	35	50	63	100		
	Z(-25 °C)/Z(+20 °C)	4	3	2							
	Z(-40 °C)/Z(+20 °C)	8	6	4	3						
Endurance	The following specification shall be satisfied when the capacitors are restored to 20 °C after subjected to DC voltage with the rated ripple current is applied for the specified period of time at 105 °C										
	Capacitance Change	≤ ± 25% of the initial value							Case Dia	Life time(hours)	
	D.F. (tan δ)	≤ 200% of the initial specified value							Φ D=6.3	6.3-100WV	
	Leakage Current	≤ The initial specified value							Φ D=8&10	2000	
									Φ D ≥ 12.5	3000	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied										
	Capacitance Change	≤ ± 25% of the initial value									
	D.F. (tan δ)	≤ 200% of the initial specified value									
	Leakage current	≤ 200% The initial specified value									

● DIMENSIONS[mm]

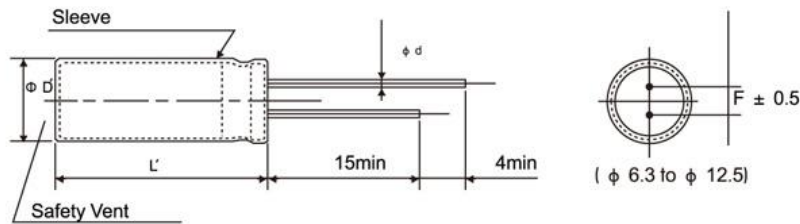

Φ D	6.3	8	10	12.5
Φ d	0.5	0.5	0.6	0.6
F	2.5	3.5	5.0	5.0
Φ D'	Φ D+0.5max			
L'	L+2max			

● RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

CAP(μF)	Freq (Hz)			
	120	1k	10k	100k
CAP < 220	0.40	0.75	0.90	1.00
220 ≤ Cap < 680	0.60	0.85	0.94	1.00
680 ≤ Cap < 2200	0.60	0.87	0.95	1.00
2200 ≤ Cap < 4700	0.75	0.90	0.95	1.00
Cap ≥ 4700	0.85	0.95	0.98	1.00

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5 °C rise. When long life performance is required in actual use, the rms ripple current has to be reduced

LF Series

● **STANDARD RATINGS** (Impedance: at 20 °C 100kHz/ Ω max, Ripple current; mArms/105 °C 100kHz)

WV (V _d)	Cap (μF)	Case Size φ D × L(mm)	tan δ	Impedance (Ω max)	Ripple current (mArms)	
6.3(OJ)	180	6.3 × 11 8 × 9	0.22	0.25 0.33	340 300	
	220	6.3 × 11 8 × 9	0.22	0.25 0.33	340 300	
	270	6.3 × 11 8 × 9	0.22	0.25 0.33	340 300	
	330	8 × 11 10 × 9	0.22	0.13 0.17	650 580	
	470	8 × 11 10 × 9	0.22	0.13 0.17	650 580	
	560	8 × 11 10 × 9	0.22	0.13 0.17	650 580	
	680	8 × 11 10 × 9	0.22	0.13 0.17	650 580	
	820	10 × 12	0.22	0.08	870	
	1000	10 × 9 10 × 12	0.22	0.17 0.08	580 870	
	1200	10 × 12	0.22	0.08	870	
	1500	8 × 20 10 × 16	0.22	0.068 0.060	1050 1210	
	1800	10 × 20	0.22	0.045	1400	
	2200	10 × 20	0.24	0.045	1400	
	2700	10 × 25 12.5 × 20	0.24	0.042 0.035	1650 1900	
	3300	10 × 25 12.5 × 20	0.26	0.042 0.036	1860 1900	
	3900	12.5 × 20	0.26	0.035	1900	
	4700	12.5 × 25	0.28	0.030	2130	
	10(1A)	150	6.3 × 11 8 × 9	0.19	0.25 0.33	340 300
180		6.3 × 11 8 × 9	0.19	0.25 0.33	340 300	
220		6.3 × 11 8 × 9	0.19	0.25 0.33	340 300	
270		8 × 9 10 × 9	0.19	0.33 0.17	300 580	
330		10 × 9	0.19	0.17	580	
470		10 × 9	0.19	0.17	580	
560		10 × 9	0.19	0.17	580	
680		10 × 9	0.19	0.17	580	
820		10 × 12	0.19	0.08	870	
1000		8 × 16 10 × 16	0.19	0.087 0.06	850 1210	
1200		10 × 20	0.19	0.045	1400	
1500		10 × 20	0.19	0.045	1400	
1800		10 × 20	0.19	0.045	1400	
2200		10 × 20	0.21	0.045	1400	
2700		10 × 25 12.5 × 20	0.21	0.042 0.035	1650 1900	
3300		12.5 × 25	0.23	0.030	2130	
16(1C)		100	8 × 9	0.16	0.33	300
		120	8 × 9	0.16	0.33	300
	150	8 × 9 10 × 9	0.16	0.33	300 580	
	180	8 × 9 10 × 9	0.16	0.33	300 580	
	220	8 × 9 10 × 9	0.16	0.33	300 580	
	270	10 × 9	0.16	0.17	580	
	330	10 × 9	0.16	0.17	580	
	470	10 × 9 10 × 12	0.16	0.17 0.08	580 870	
	560	10 × 12	0.16	0.08	870	
	680	8 × 16 10 × 12	0.16	0.087 0.08	850 870	
	820	10 × 16	0.16	0.06	1210	
	1000	10 × 16	0.16	0.06	1210	
	1200	10 × 20	0.16	0.045	1400	
	1500	10 × 20	0.16	0.045	1400	
	1800	10 × 25 12.5 × 20	0.16	0.042 0.035	1650 1800	
	2200	12.5 × 20	0.18	0.035	1900	
	2700	12.5 × 20	0.18	0.030	2130	

WV (V _d)	Cap (μF)	Case Size φ D × L(mm)	tan δ	Impedance (Ω max)	Ripple current (mArms)	
25(1E)	82	6.3 × 11 8 × 9	0.14	0.25 0.33	340 300	
	100	6.3 × 11 8 × 9	0.14	0.25 0.23	340 300	
	120	8 × 11 10 × 9	0.14	0.13 0.17	650 580	
	150	8 × 11 10 × 9	0.14	0.13 0.17	650 580	
	180	8 × 11 10 × 9	0.14	0.13 0.17	650 580	
	220	8 × 11 10 × 9	0.14	0.13 0.17	650 580	
	270	10 × 9 10 × 12	0.14	0.17 0.08	580 870	
	330	10 × 9 10 × 12	0.14	0.17 0.08	580 870	
	470	8 × 16 10 × 12	0.14	0.087 0.080	840 870	
	560	10 × 16	0.14	0.060	1210	
	680	10 × 16	0.14	0.060	1210	
	820	10 × 20	0.14	0.045	1400	
	1000	10 × 20	0.14	0.045	1400	
	1200	10 × 20	0.14	0.045	1400	
	1500	10 × 25 12.5 × 20	0.14	0.042 0.035	1650 1900	
	1800	12.5 × 25	0.14	0.030	2130	
	2200	12.5 × 25	0.16	0.030	2130	
	35(1V)	47	6.3 × 11 8 × 9	0.12	0.25 0.33	340 300
		56	6.3 × 11 8 × 9	0.12	0.25 0.33	340 300
		68	6.3 × 11 8 × 9	0.12	0.25 0.33	340 300
82		8 × 11 10 × 9	0.12	0.13 0.17	650 580	
100		8 × 11 10 × 9	0.12	0.13 0.17	650 580	
120		8 × 11 10 × 9	0.12	0.13 0.17	650 580	
150		8 × 11 10 × 9	0.12	0.13 0.17	650 580	
180		10 × 12	0.12	0.080	870	
220		8 × 11 10 × 9 8 × 16 10 × 12	0.12	0.13 0.17 0.087 0.080	650 580 840 870	
270		10 × 15	0.12	0.06	1210	
330		8 × 20 10 × 12 10 × 16	0.12	0.069 0.080 0.060	1000 870 1210	
470		10 × 16	0.12	0.060	1210	
560		10 × 20	0.12	0.045	1400	
680		10 × 20	0.12	0.045	1400	
820		10 × 25 12.5 × 20	0.12	0.042 0.035	1650 1900	
1000		12.5 × 20 12.5 × 25	0.12	0.035 0.030	1900 2130	
50(1H)		33	6.3 × 11 8 × 9	0.10	0.30 0.40	295 260
		39	6.3 × 11 8 × 9	0.10	0.30 0.40	295 260
		47	6.3 × 11 8 × 9	0.10	0.30 0.40	295 260
		56	8 × 11 10 × 9	0.10	0.17 0.23	560 500
	68	8 × 11 10 × 9	0.10	0.17 0.23	560 500	
	82	8 × 11 10 × 9	0.10	0.17 0.23	560 500	
	100	10 × 12	0.10	0.12	760	
	120	8 × 16 10 × 12	0.10	0.12 0.12	730 760	
	150	10 × 16	0.10	0.084	1050	
	180	8 × 20 10 × 16	0.10	0.090 0.084	1050	
	220	10 × 16	0.10	0.084	1050	
	270	10 × 25	0.10	0.055	1440	
	330	12.5 × 20	0.10	0.045	1660	
	470	12.5 × 25	0.10	0.034	1950	
	580	12.5 × 25	0.10	0.034	1950	

LF Series

● **STANDARD RATINGS** (Impedance: at 20 °C 100kHz/ Ω max, Ripple current; mArms/105 °C 100kHz)

WV (V _d)	Cap (μF)	Case Size φ D × L(mm)	tan δ	Impedance (Ω max)	Ripple current (mArms)
63(1J)	22	6.3 × 11 8 × 9	0.09	0.95 1.24	120 100
	27	6.3 × 11 8 × 9	0.09	0.95 1.24	120 100
	33	6.3 × 11 8 × 9	0.09	0.95 1.24	120 100
	39	8 × 11 10 × 9	0.09	0.51 0.67	235 210
	47	8 × 11 10 × 9	0.09	0.51 0.67	235 210
	56	8 × 11 10 × 9	0.09	0.51 0.67	235 210
	68	8 × 11 10 × 9	0.09	0.51 0.67	235 210
	82	10 × 12	0.09	0.340	315
	100	8 × 16 10 × 12	0.09	0.350 0.340	300 315
	120	10 × 16	0.09	0.245	360
	150	8 × 20	0.09	0.265	360
	180	10 × 20	0.09	0.165	470
	220	10 × 20	0.09	0.165	470
	270	12.5 × 20	0.09	0.125	700
	330	12.5 × 20	0.09	0.125	700
	390	12.6 × 25	0.09	0.095	930

WV (V _d)	Cap (μF)	Case Size φ D × L(mm)	tan δ	Impedance (Ω max)	Ripple current (mArms)
100(2A)	15	6.3 × 11 8 × 9	0.08	0.95 1.24	120 100
	27	8 × 11 10 × 9	0.08	0.51 0.67	235 210
	39	8 × 16	0.08	0.36	300
	47	10 × 12	0.08	0.34	315
	56	8 × 20	0.08	0.265	360
	68	10 × 16	0.08	0.245	360
	82	10 × 20	0.08	0.165	470
	100	10 × 20	0.08	0.165	470
	120	12.5 × 20	0.08	0.125	700
	180	12.5 × 25	0.08	0.095	930
	220	12.5 × 25	0.08	0.095	930

LF Series


- High frequency, low impedance
- Endurance; +105 °C 2,000 ~ 3,000 hours
- RoHS Compliant



● SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	-25 to +105 °C (160V-450Vdc)							
Rated Voltage Range	160 to 450Vdc							
Capacitance Tolerance	± 20%(M) (at 20 °C 120Hz)							
Leakage Current	$1 \leq 0.02CV$ or $10 \mu A$, whichever is greater Where, I:Max.leakage current(μA), C:Nominal capacitance (μF) V:Rated voltage(V) (at 20 °C ,after 2minutes)							
Dissipation Factor (tan δ)	Rated voltage(Vdc)	160	200	250	350	400	450	(at 20 °C 120Hz)
	tan δ (Max)	0.12	0.12	0.12	0.15	0.15	0.20	
Low Temperature Characteristics (Max.Impedance Ratio)	Rate Voltage(Vdc)	160	200	250	350	400	450	(at 120Hz)
	Z(-25 °C)/Z(+20 °C)	3	5			6		
	Z(-40 °C)/Z(+20 °C)	4	7			-		
Endurance	The following specification shall be satisfied when the capacitors are restored to 20 °C after subjected to DC voltage with the rated ripple current is applied for the specified period of time at 105 °C							
	Capacitance Change	$\leq \pm 20\%$ of the initial value					Case Dia	Life time(hours)
	D.F. (tan δ)	$\leq 200\%$ of the initial specified value					$\Phi D \leq 8$	2000
	Leakage Current	\leq The initial specified value					$\Phi D \geq 10$	3000
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1,000 hours at 105 °C without voltage applied							
	Capacitance Change	$\leq \pm 20\%$ of the initial value						
	D.F. (tan δ)	$\leq 200\%$ of the initial specified value						
	Leakage Current	$\leq 200\%$ The initial specified value						

● DIMENSIONS[mm]

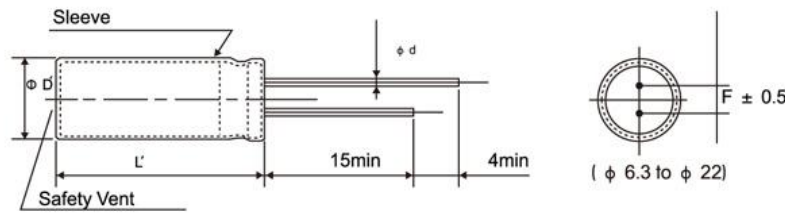

Φ D	6.3	8	10	12.5	16	18	22
Φ d	0.5	0.5	0.6	0.6	0.8	0.8	0.8
F	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Φ D'	Φ D+0.5max						
L'	L+2max						

● RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

CAP(μF)	Freq (Hz)			
	120	1k	10k	100k
CAP < 18	0.59	0.85	0.97	1.00
18 ≤ Cap. < 100	0.62	0.89	0.97	1.00
Cap ≥ 100	0.72	0.90	0.98	1.00

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5 °C rise, When long life performance is required in actual use, the rms ripple current has to be reduced

LF Series

STANDARD RATINGS

WV (V _{dc})	Cap (μ F)	Case Size φ D × L(mm)	tan δ	Ripple current (mA _{rms} /105 °C, 100kHz)
160(2C)	2.2	6.3 × 11	0.12	54
	3.3	6.3 × 11	0.12	70
	4.7	8 × 12	0.12	82
	10	10 × 12	0.12	142
	22	10 × 16	0.12	206
	33	10 × 20	0.12	265
	47	12.5 × 20	0.12	332
	100	12.5 × 25	0.12	546
	220	16 × 30	0.12	822
200(2D)	1	5 × 11	0.12	34
	2.2	6.3 × 11	0.12	52
	3.3	6.3 × 11	0.12	70
	4.7	8 × 12	0.12	82
	10	10 × 12	0.12	144
	22	10 × 16	0.12	206
	22	10 × 20	0.12	215
	33	10 × 20	0.12	288
	33	12.5 × 20	0.12	330
	47	12.5 × 20	0.12	366
	56	12.5 × 25	0.12	430
	68	12.5 × 25	0.12	488
	82	10 × 30	0.12	518
	100	16 × 25	0.12	720
	120	16 × 25	0.12	745
	150	18 × 25	0.12	845
	180	12.5 × 35	0.12	882
	220	18 × 30	0.12	960
250(2E)	0.47	6.3 × 11	0.12	35
	1	6.3 × 11	0.12	40
	2.2	6.3 × 11	0.12	52
	3.3	8 × 12	0.12	72
	4.7	8 × 12	0.12	84
	10	10 × 12	0.12	144
	22	10 × 20	0.12	220
	33	12.5 × 20	0.12	335
	47	12.5 × 25	0.12	382
	56	12.5 × 25	0.12	426
	82	16 × 25	0.12	575
	100	16 × 30	0.12	740
	220	18 × 35	0.12	1010
	330	18 × 45	0.12	1100
	470	22 × 45	0.12	1200
350(2V)	0.47	6.3 × 11	0.15	35
	1	6.3 × 11	0.15	40
	2.2	8 × 12	0.15	54
	3.3	8 × 12	0.15	74
	3.3	10 × 12	0.15	80
	4.7	10 × 16	0.15	104
	10	10 × 16	0.15	170
	22	12.5 × 25	0.15	285
	33	16 × 25	0.15	330
47	16 × 30	0.15	480	

WV (V _{dc})	Cap (μ F)	Case Size φ D × L(mm)	tan δ	Ripple current (mA _{rms} /105 °C, 100kHz)
400(2G)	1	8 × 12	0.15	40
	2.2	8 × 12	0.15	62
	3.3	8 × 12	0.15	85
	3.3	10 × 12	0.15	90
	4.7	10 × 12	0.15	106
	10	10 × 16	0.15	175
	10	10 × 20	0.15	200
	22	12.5 × 20	0.15	300
	27	10 × 30	0.15	385
	33	10 × 35	0.15	450
	33	16 × 20	0.15	440
	39	10 × 40	0.15	490
	47	12.5 × 30	0.15	595
	47	16 × 25	0.15	584
	56	10 × 45	0.15	655
	56	12.5 × 35	0.15	650
	68	12.5 × 40	0.15	815
	68	16 × 30	0.15	780
	82	12.5 × 40	0.15	850
	82	18 × 30	0.15	835
	100	12.5 × 50	0.15	890
100	18 × 30	0.15	870	
120	22 × 31	0.15	895	
150	12.5 × 60	0.15	950	
150	22 × 31	0.15	940	
450(2W)	1	8 × 12	0.20	40
	2.2	10 × 12	0.20	65
	3.3	10 × 16	0.20	92
	4.7	10 × 20	0.20	108
	10	12.5 × 20	0.20	160
	18	10 × 30	0.20	200
	22	16 × 20	0.20	305
	27	10 × 30	0.20	385
	33	10 × 35	0.20	460
	33	16 × 25	0.20	455
	39	10 × 40	0.20	500
	47	10 × 45	0.20	635
	47	12.5 × 30	0.20	630
	47	18 × 25	0.20	620
	56	12.5 × 35	0.20	705
	56	18 × 25	0.20	695
	68	12.5 × 40	0.20	750
	68	18 × 30	0.20	730
	82	12.5 × 45	0.20	800
	82	18 × 30	0.20	770
100	18 × 35	0.20	860	
120	18 × 40	0.20	1050	
150	22 × 40	0.20	1260	
220	22 × 46	0.20	1430	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [TOPAZ](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#)
[VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)