

# TCR3DMxxA series


300 mA CMOS Low Drop-Out Regulator with inrush current protection circuit

## 1. Description

The TCR3DMxxA series are CMOS general-purpose single-output voltage regulators with an on/off control input, featuring low dropout voltage, low output noise voltage, fast load transient response and low inrush current.

These voltage regulators are available in fixed output voltages between 1.0 V and 4.5 V and capable of driving up to 300 mA. They feature Overcurrent protection, Thermal shutdown, Inrush current protection circuit and Auto-discharge.

The TCR3DMxxA series is offered in the ultra small plastic mold package DFN4D (1.0 mm x 1.0 mm; t 0.37 mm (typ.)) and has a low dropout voltage of 216 mV (2.5 V output,  $I_{OUT} = 300$  mA) with low output noise voltage of 38  $\mu$ Vrms (2.5 V output). As small ceramic input and output capacitors 1.0  $\mu$ F can be used with the TCR3DMxxA series, these devices are ideal for portable applications that require high-density board assembly such as cellular phones.

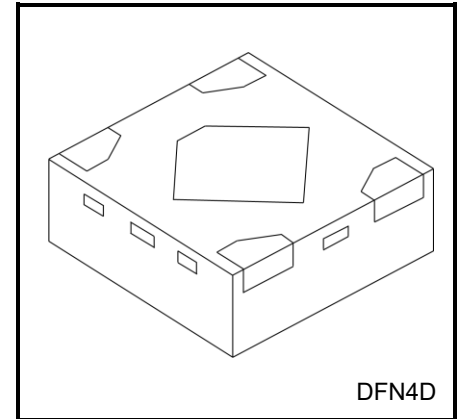

DFN4D

Weight: 1.1 mg (typ.)

## 2. Applications

Power IC developed for portable applications

## 3. Features

- Ultra small package DFN4D (1.0 mm x 1.0 mm; t 0.37 mm (typ.))
- Wide range output voltage line up ( $V_{OUT} = 1.0$  to 4.5 V)
- Low dropout voltage
  - $V_{DO} = 175$  mV (typ.) at 3.3 V output,  $I_{OUT} = 300$  mA
  - $V_{DO} = 216$  mV (typ.) at 2.5 V output,  $I_{OUT} = 300$  mA
  - $V_{DO} = 297$  mV (typ.) at 1.8 V output,  $I_{OUT} = 300$  mA
- Low output noise voltage ( $V_{NO} = 38$   $\mu$ Vrms (typ.) at 10Hz  $\leq f \leq$  100kHz)
- High ripple rejection ratio (72 dB (typ.) at 2.5 V output,  $I_{OUT} = 10$  mA,  $f = 1$  kHz)
- Fast load transient response ( $\pm 80$  mV (typ.) at 2.5 V output,  $I_{OUT} = 1$  mA  $\Leftrightarrow$  300 mA)
- Overcurrent protection
- Thermal shutdown
- Inrush current protection circuit
- Auto-discharge
- Pull down connection between CONTROL and GND
- Ceramic capacitors can be used ( $C_{IN} = 1.0$   $\mu$ F,  $C_{OUT} = 1.0$   $\mu$ F)

Start of commercial production  
2023-11

## 4. Absolute Maximum Ratings (Note) ( $T_a = 25\text{ }^{\circ}\text{C}$ )

Characteristics	Symbol	Rating	Unit
Input voltage	$V_{IN}$	-0.3 to 6.0	V
Control voltage	$V_{CT}$	-0.3 to 6.0	V
Output voltage	$V_{OUT}$	-0.3 to $V_{IN} + 0.3 \leq 6.0$	V
Power dissipation	$P_D$	420 (Note1)	mW
Junction temperature	$T_j$	150	$^{\circ}\text{C}$
Storage temperature range	$T_{stg}$	-55 to 150	$^{\circ}\text{C}$

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).


Note1: Rating at mounting on a board

Glass epoxy(FR4) board dimension: 40 mm x 40 mm x 1.6mm, both sides of board.

Metal pattern ratio: a surface approximately 50%, the reverse side approximately 50 %

Through hole hall: diameter 0.5 mm x 24 pcs

## 5. Pin Assignment (Top view)



\*Center electrode should be connected to GND or Open

## 6. Operating Ranges

Characteristics	Symbol	Rating		Unit
Input voltage	$V_{IN}$	1.5 to 5.5	(Note 2)	V
Control voltage	$V_{CT}$	0 to 5.5		V
Output voltage	$V_{OUT}$	1.0 to 4.5		V
Output current	$I_{OUT}$	DC	300	mA
Operation Temperature	$T_{opr}$	-40 to 85		$^{\circ}\text{C}$
Output Capacitance	$C_{OUT}$	$\geq 1.0$		$\mu\text{F}$
Input Capacitance	$C_{IN}$	$\geq 1.0$		$\mu\text{F}$

Note 2: Please refer to Dropout Voltage and use it within Absolute Maximum Ratings Junction temperature and Operation Temperature Ranges.


### 7. List of Products Number, Output voltage and Marking

Product No.	Output voltage (V)	Marking	Product No.	Output voltage (V)	Marking
TCR3DM10A	1.0	1P0	TCR3DM26A*	2.6	2P6
TCR3DM105A	1.05	1PA	TCR3DM27A*	2.7	2P7
TCR3DM11A	1.1	1P1	TCR3DM28A	2.8	2P8
TCR3DM115A*	1.15	1PB	TCR3DM285A*	2.85	2PD
TCR3DM12A	1.2	1P2	TCR3DM29A*	2.9	2P9
TCR3DM13A*	1.3	1P3	TCR3DM2925A*	2.925	2PH
TCR3DM135A*	1.35	1PD	TCR3DM30A*	3.0	3P0
TCR3DM14A*	1.4	1P4	TCR3DM31A*	3.1	3P1
TCR3DM15A	1.5	1P5	TCR3DM32A*	3.2	3P2
TCR3DM16A*	1.6	1P6	TCR3DM33A	3.3	3P3
TCR3DM175A*	1.75	1PE	TCR3DM35A*	3.5	3P5
TCR3DM18A	1.8	1P8	TCR3DM36A*	3.6	3P6
TCR3DM1825A*	1.825	1PF	TCR3DM41A*	4.1	4P1
TCR3DM185A*	1.85	1PG	TCR3DM42A*	4.2	4P2
TCR3DM19A*	1.9	1P9	TCR3DM45A	4.5	4P5
TCR3DM25A	2.5	2P5	—	—	—


\* Please contact your local Toshiba representative if you are interested in products with \* sign.

### Top Marking (Top view)

Example: TCR3DM33A (3.3 V output)

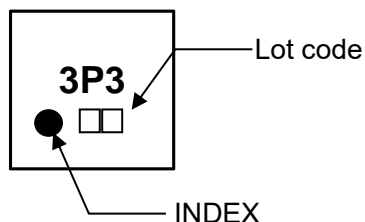

## 8. Block Diagram

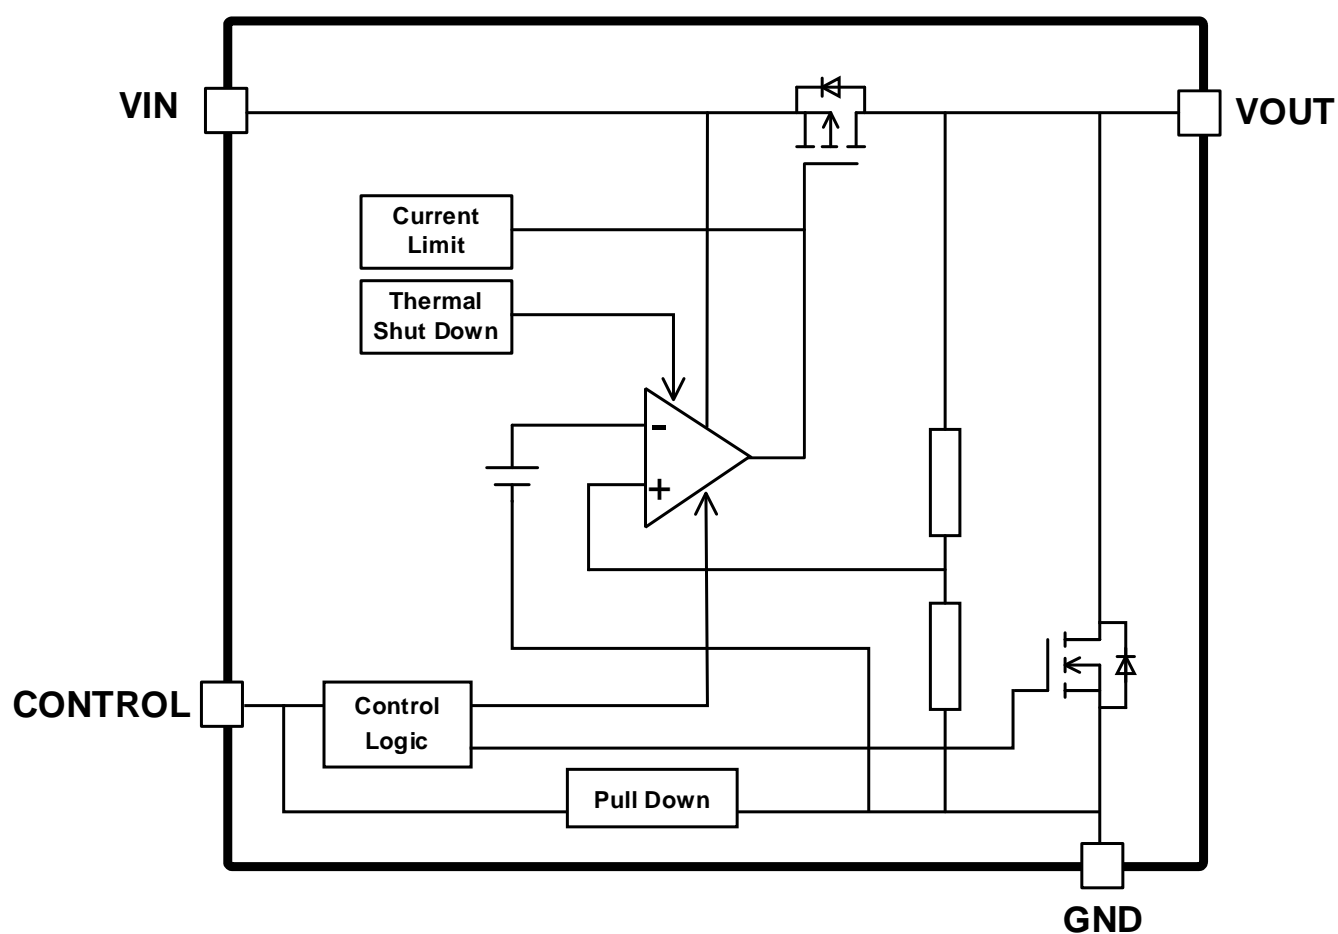

## 9. Electrical Characteristics

(Unless otherwise specified,  $V_{IN} = V_{OUT} + 1.0\text{ V}$ ,  $C_{IN} = 1.0\text{ }\mu\text{F}$ ,  $C_{OUT} = 1.0\text{ }\mu\text{F}$ )

Characteristics	Symbol	Test Condition		T <sub>j</sub> = 25 °C			T <sub>j</sub> = -40 to 85 °C (Note 8)		Unit
				Min	Typ.	Max	Min	Max	
Output voltage accuracy	V <sub>OUT</sub>	I <sub>OUT</sub> = 50 mA V <sub>IN</sub> = V <sub>OUT</sub> + 1.0 V (Note 3)	V <sub>OUT</sub> < 1.8 V	-18	—	+18	—	—	mV
			1.8V ≤ V <sub>OUT</sub>	-1.0	—	+1.0	—	—	%
Line regulation	Reg·line	V <sub>OUT</sub> + 0.5 V ≤ V <sub>IN</sub> ≤ 5.5 V I <sub>OUT</sub> = 1 mA		—	1	—	—	—	mV
Load regulation	Reg·load	1 mA ≤ I <sub>OUT</sub> ≤ 300 mA		—	18	—	—	52	mV
Quiescent current	I <sub>B(ON)</sub>	I <sub>OUT</sub> = 0 mA V <sub>IN</sub> = 5.5 V (Note 5)	V <sub>OUT</sub> = 4.5 V	—	86	—	—	159	μA
Stand-by current	I <sub>B (OFF)</sub>	V <sub>CT</sub> = 0 V, V <sub>IN</sub> = 5.5 V (Note 5)		—	0.1	—	—	1	μA
Control pull down current	I <sub>CT</sub>	—		—	0.1	—	—	0.2	μA
Drop-out voltage (Note 9)	V <sub>DO</sub>	I <sub>OUT</sub> = 300 mA	V <sub>OUT</sub> = 1.8 V	—	297	335	—	389	mV
			V <sub>OUT</sub> = 2.5 V	—	216	262	—	296	mV
			V <sub>OUT</sub> = 3.3 V	—	175	206	—	242	mV
			V <sub>OUT</sub> = 4.5 V	—	148	179	—	231	mV
Output noise voltage	V <sub>NO</sub>	I <sub>OUT</sub> = 10 mA 10 Hz ≤ f ≤ 100 kHz, T <sub>a</sub> = 25 °C (Note 4)		—	38	—	—	—	μV <sub>rms</sub>
Ripple rejection ratio	R.R.	V <sub>IN</sub> = 3.5 V V <sub>OUT</sub> = 2.5 V I <sub>OUT</sub> = 10 mA, V <sub>IN</sub> Ripple = 500 mV <sub>p-p</sub> , T <sub>a</sub> = 25 °C (Note 4)	f = 100 Hz	—	75	—	—	—	dB
			f = 1 kHz	—	72	—	—	—	
			f = 10 kHz	—	54	—	—	—	
			f = 100 kHz	—	48	—	—	—	
			f = 1 MHz	—	55	—	—	—	
Load transient response	ΔV <sub>OUT</sub>	I <sub>OUT</sub> = 1 mA → 300 mA (Note 4) (Note 6)		—	-80	—	—	—	mV
		I <sub>OUT</sub> = 300 mA → 1 mA (Note 4) (Note 6)		—	+80	—	—	—	
Output current limit	I <sub>CL</sub>	V <sub>OUT</sub> = V <sub>OUT(NOM)</sub> *90 % (Note 7)		—	—	—	320	650	mA
Thermal shutdown threshold	T <sub>SDH</sub>	T <sub>J</sub> rising		—	160	—	—	—	°C
	T <sub>SDL</sub>	T <sub>J</sub> falling		—	130	—	—	—	°C
Control voltage (HIGH)	V <sub>CTH</sub>	Control pin input voltage “HIGH”		—	—	—	0.8	5.5	V
Control voltage (LOW)	V <sub>CTL</sub>	Control pin input voltage “LOW”		—	—	—	0	0.4	V
Discharge on resistance	R <sub>SD</sub>	(Note 4)		—	45	—	—	—	Ω

Note 3: stable state with fixed  $I_{OUT}$  condition

Note 4:  $V_{OUT} = 2.5\text{ V}$

Note 5: except Control pull down current ( $I_{CT}$ )

Note 6:  $t_r = t_f = 1.0\text{ }\mu\text{s}$  (Defined when 10 % to 90 % is 0.8  $\mu\text{s}$ )

Note 7: Pulse measurement

Note 8: This parameter is warranted by design.

Note 9:  $V_{DO} = V_{IN1} - (V_{OUT1} \times 0.97)$

$V_{OUT1}$  is the output voltage when  $V_{IN} = V_{OUT} + 1.0\text{ V}$ .

$V_{IN1}$  is the input voltage at which the output voltage becomes 97 % of  $V_{OUT1}$  after gradually decreasing the input voltage.

## 10. Drop-out voltage table


( $I_{OUT} = 300 \text{ mA}$ ,  $C_{IN} = 1.0 \text{ } \mu\text{F}$ ,  $C_{OUT} = 1.0 \text{ } \mu\text{F}$ )

Output voltages	Symbol	$T_j = 25 \text{ } ^\circ\text{C}$			$T_j = -40 \text{ to } 85 \text{ } ^\circ\text{C}$ (Note 10)		Unit
		Min	Typ.	Max	Min	Max	
1.0 V, 1.05 V	$V_{IN-VOUT}$	—	642	738	—	790	mV
1.1 V, 1.15 V		—	566	666	—	716	
1.2 V		—	500	592	—	644	
1.3 V		—	456	535	—	590	
1.35V, 1.4 V		—	434	506	—	563	
$1.5 \text{ V} \leq V_{OUT} < 1.8 \text{ V}$		—	367	419	—	481	
$1.8 \text{ V} \leq V_{OUT} < 1.9 \text{ V}$		—	297	335	—	389	
$1.9 \text{ V} \leq V_{OUT} < 2.5 \text{ V}$		—	277	309	—	365	
$2.5 \text{ V} \leq V_{OUT} < 2.8 \text{ V}$		—	216	262	—	296	
$2.8 \text{ V} \leq V_{OUT} < 3.2 \text{ V}$		—	196	233	—	268	
$3.2 \text{ V} \leq V_{OUT} < 3.6 \text{ V}$		—	179	211	—	247	
$3.6 \text{ V} \leq V_{OUT} \leq 4.5 \text{ V}$		—	168	199	—	240	

Note 10: This parameter is guaranteed by design.

## 11. Application Note

### 11.1. Recommended Application Circuit

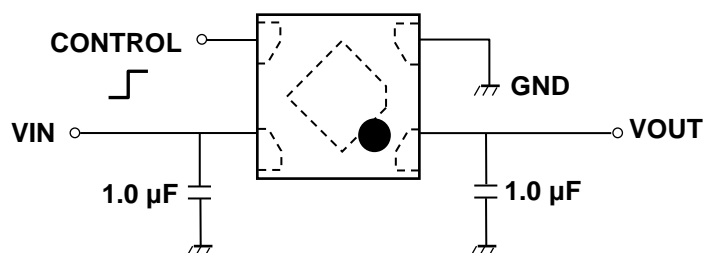

CONTROL voltage	Output voltage
HIGH	ON
LOW	OFF
OPEN	OFF

The figure above shows the recommended configuration for using a Low-Dropout regulator. Insert a capacitor at VOUT and VIN pins for stable input/output operation. (Ceramic capacitors can be used).

### 11.2. Power Dissipation

Board-mounted power dissipation ratings for TCR3DMxxA series are available in the Absolute Maximum Ratings table. Power dissipation is measured on the board condition shown below.


[The Board Condition]

Board material: Glass epoxy(FR4)

Board dimension: 40 mm x 40 mm (both sides of board), t = 1.6 mm

Metal pattern ratio: a surface approximately 50%, the reverse side approximately 50 %

Through hole: diameter 0.5 mm x 24 pcs

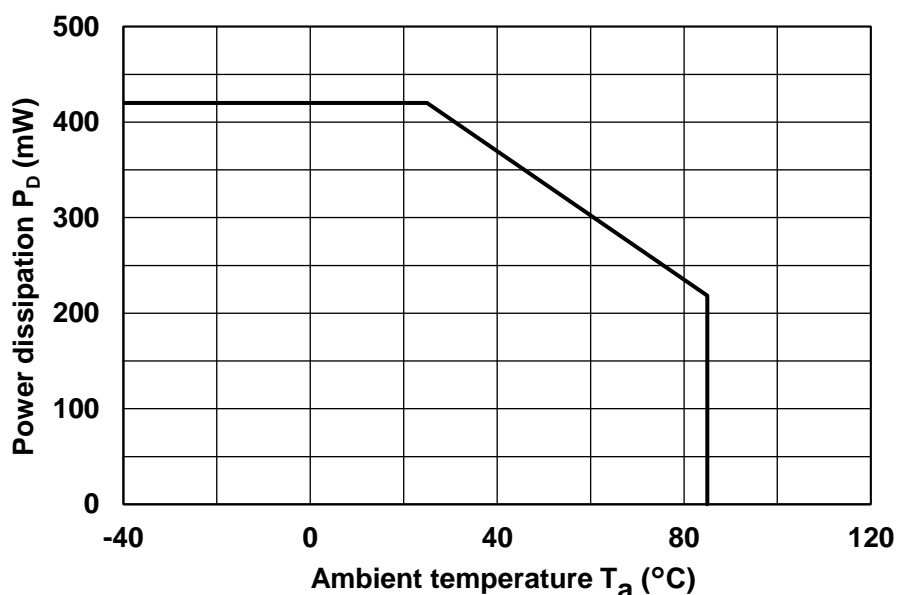

### 11.3. Attention in Use

- Output Capacitors

Ceramic capacitors can be used for these devices. However, because of the type of the capacitors, there might be unexpected thermal features. Please consider application condition for selecting capacitors. And Toshiba recommend ceramic capacitor.

- Mounting

The long distance between IC and output capacitor might affect phase assurance by impedance in wire and inductor. For stable power supply, output capacitor need to mount near IC as much as possible. Also VIN and GND pattern need to be large and make the wire impedance small as possible.

- Permissible Loss

Please have enough design patterns for expected maximum permissible loss. And under consideration of surrounding temperature, input voltage, and output current etc., we recommend proper dissipation ratings for maximum permissible loss; in general maximum dissipation rating is 70 to 80 %.

- Over current Protection and Thermal shut down function




Over current protection and Thermal shut down function are designed in these products, but these are not designed to constantly ensure the suppression of the device within operation limits. Depending on the condition during actual usage, it could affect the electrical characteristic specification and reliability. Also note that if output pins and GND pins are not completely shorted out, these products might be break down. When using these products, please read through and understand the concept of dissipation for absolute maximum ratings from the above mention or our 'Semiconductor Reliability Handbook'. Then use these products under absolute maximum ratings in any condition. Furthermore, Toshiba recommend inserting failsafe system into the design.



## 12. Representation Typical Characteristics (Note)

### 12.1. Output Voltage vs. Output Current




( $V_{IN} = V_{OUT} + 1.0 \text{ V}$ )

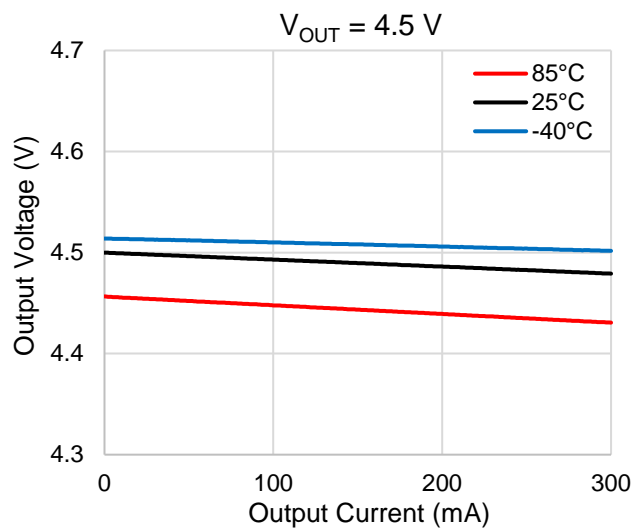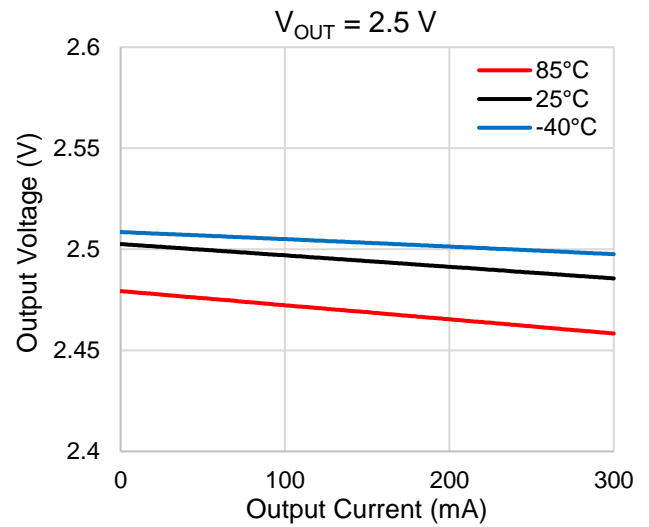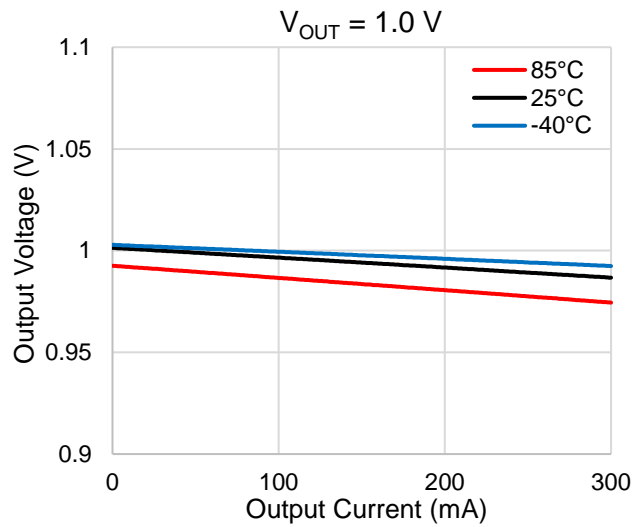

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.




## 12.2. Output Voltage vs. Input Voltage

( $I_{OUT} = 1 \text{ mA}$ )

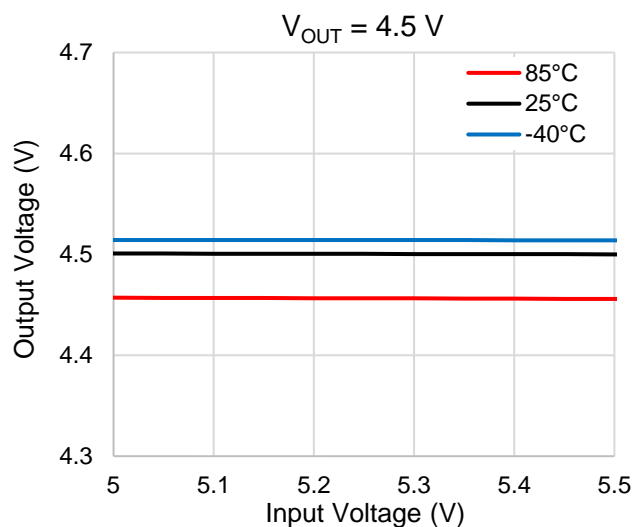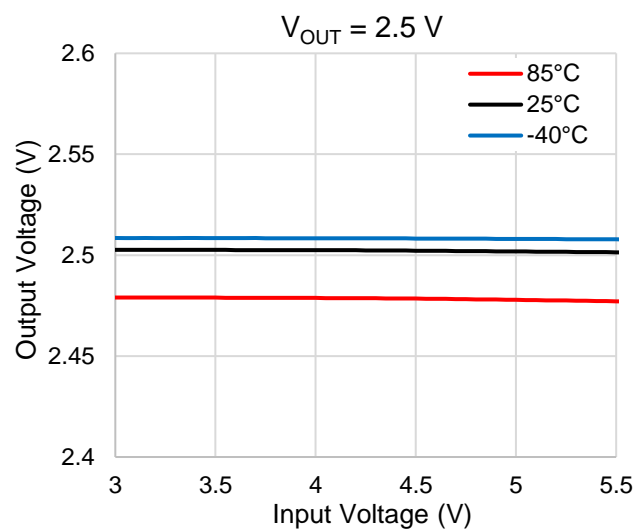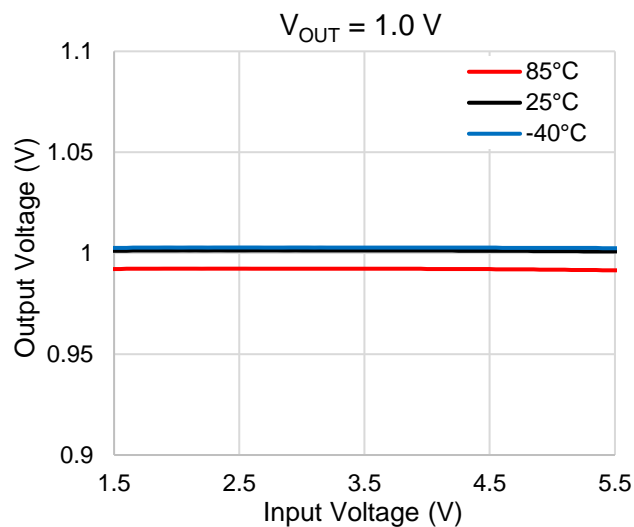

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.




## 12.3. Dropout Voltage vs. Output Current

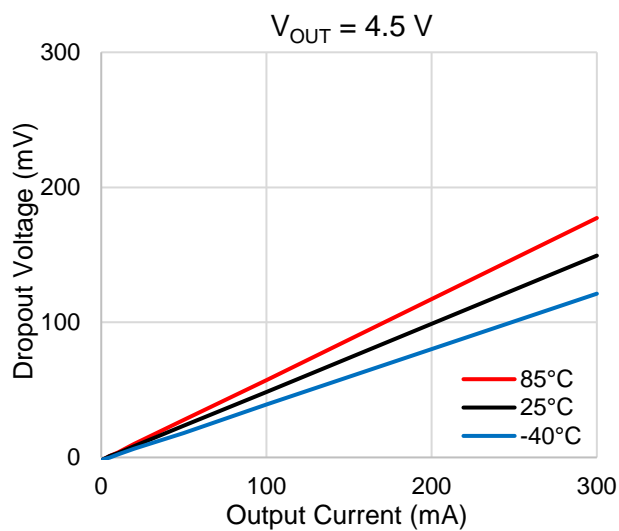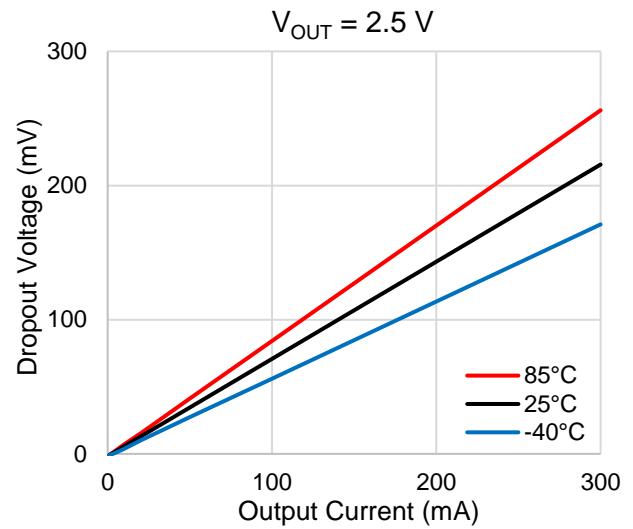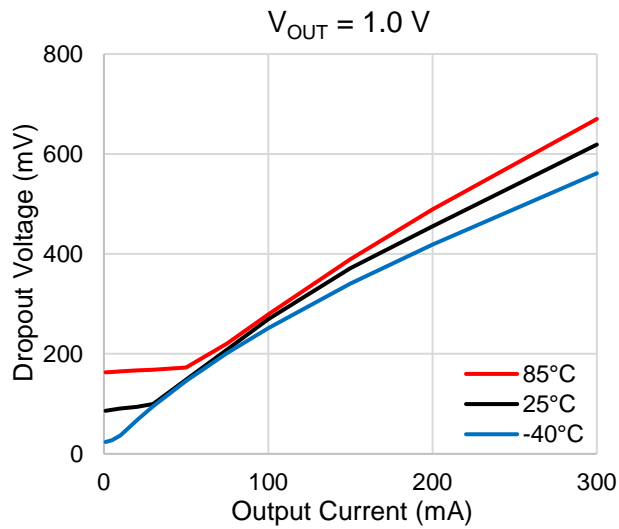

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

## 12.4. Quiescent Current vs. Input Voltage




( $I_{OUT} = 0$  mA)

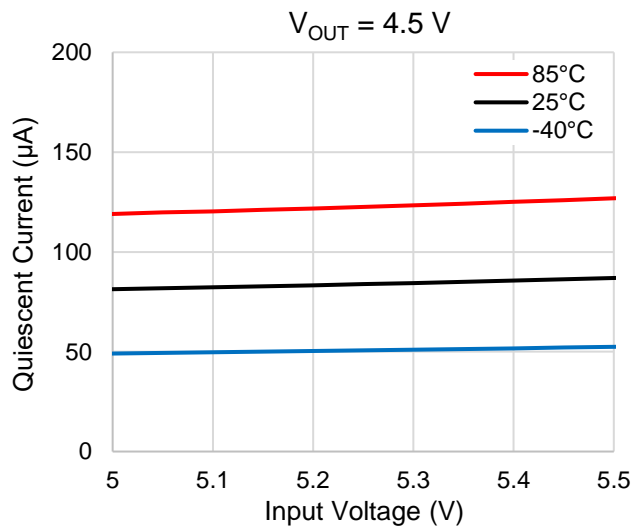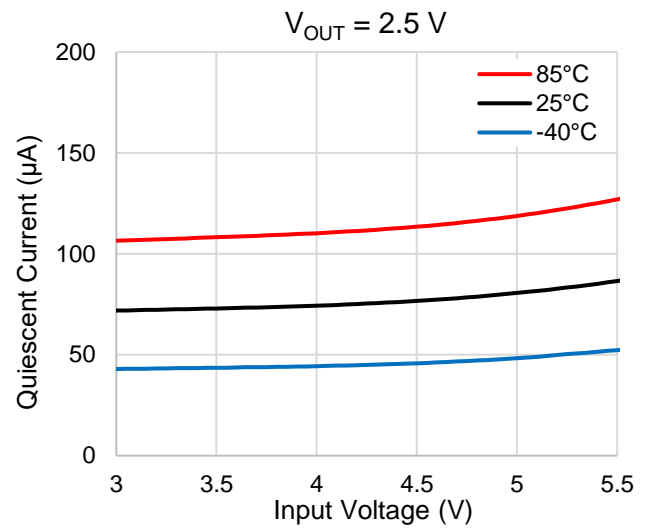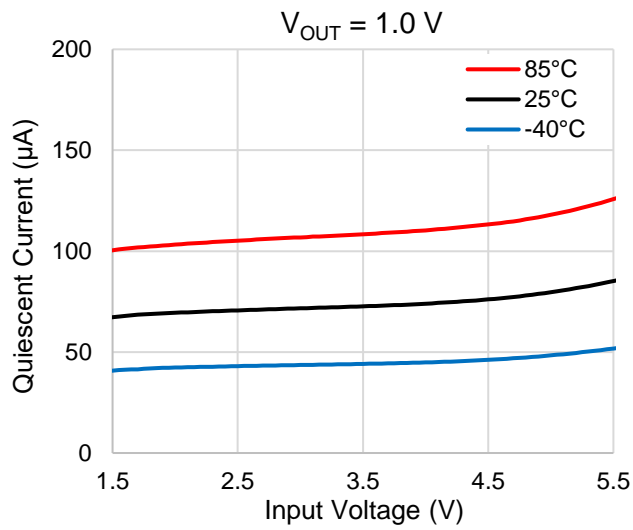

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

## 12.5. Output Current Limit




( $V_{IN} = V_{OUT} + 1.0\text{ V}$ )

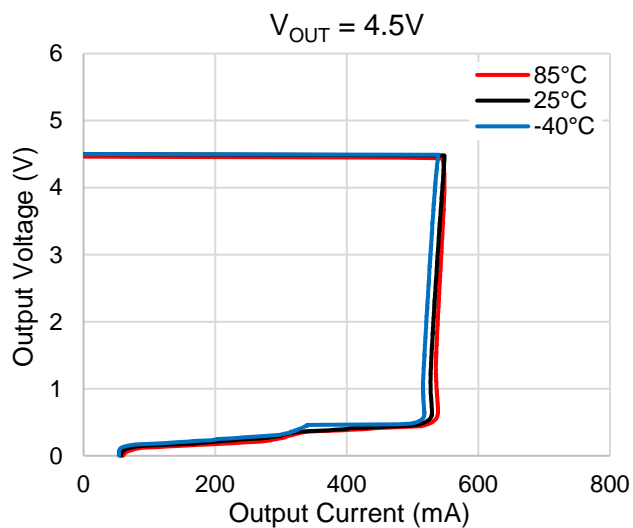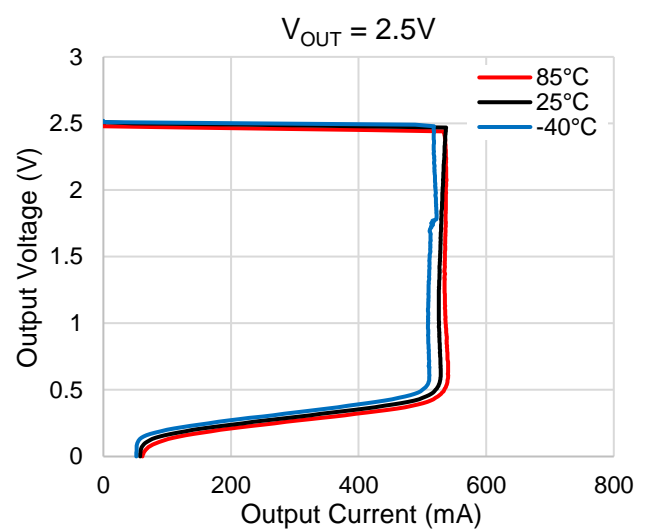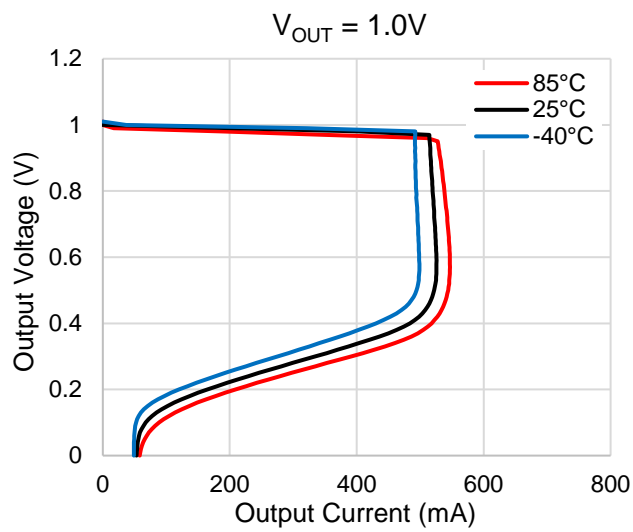

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

## 12.6. Ripple rejection Ratio vs. Frequency


( $C_{IN}$  = none,  $C_{OUT}$  = 1.0  $\mu$ F,  $V_{IN}$  =  $V_{OUT}$  + 1.0 V,  $V_{IN}$  Ripple = 500 mV<sub>p-p</sub>,  $I_{OUT}$  = 10 mA,  $T_a$  = 25°C)

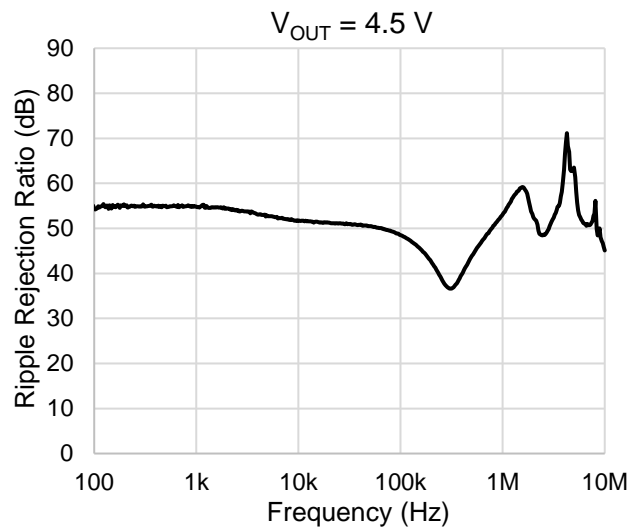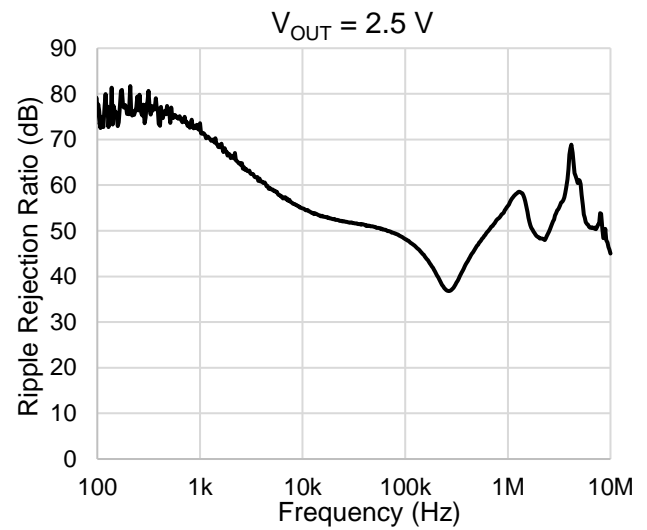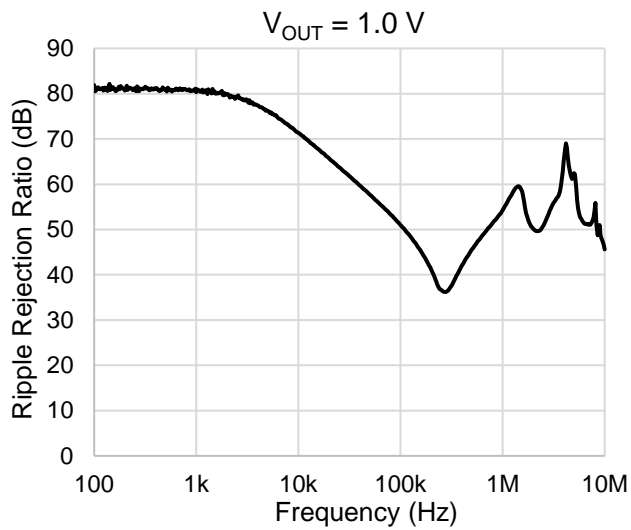

Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

## 12.7. Load Transient Response

( $C_{IN} = 1.0 \mu F$ ,  $C_{OUT} = 1.0 \mu F$ ,  $V_{IN} = V_{OUT} + 1.0 V$ ,  $I_{OUT} = 1 mA \Leftrightarrow 300 mA$ ,  $t_r = 1.0 \mu s$ ,  $t_f = 1.0 \mu s$ ,  $T_a = 25^\circ C$ )

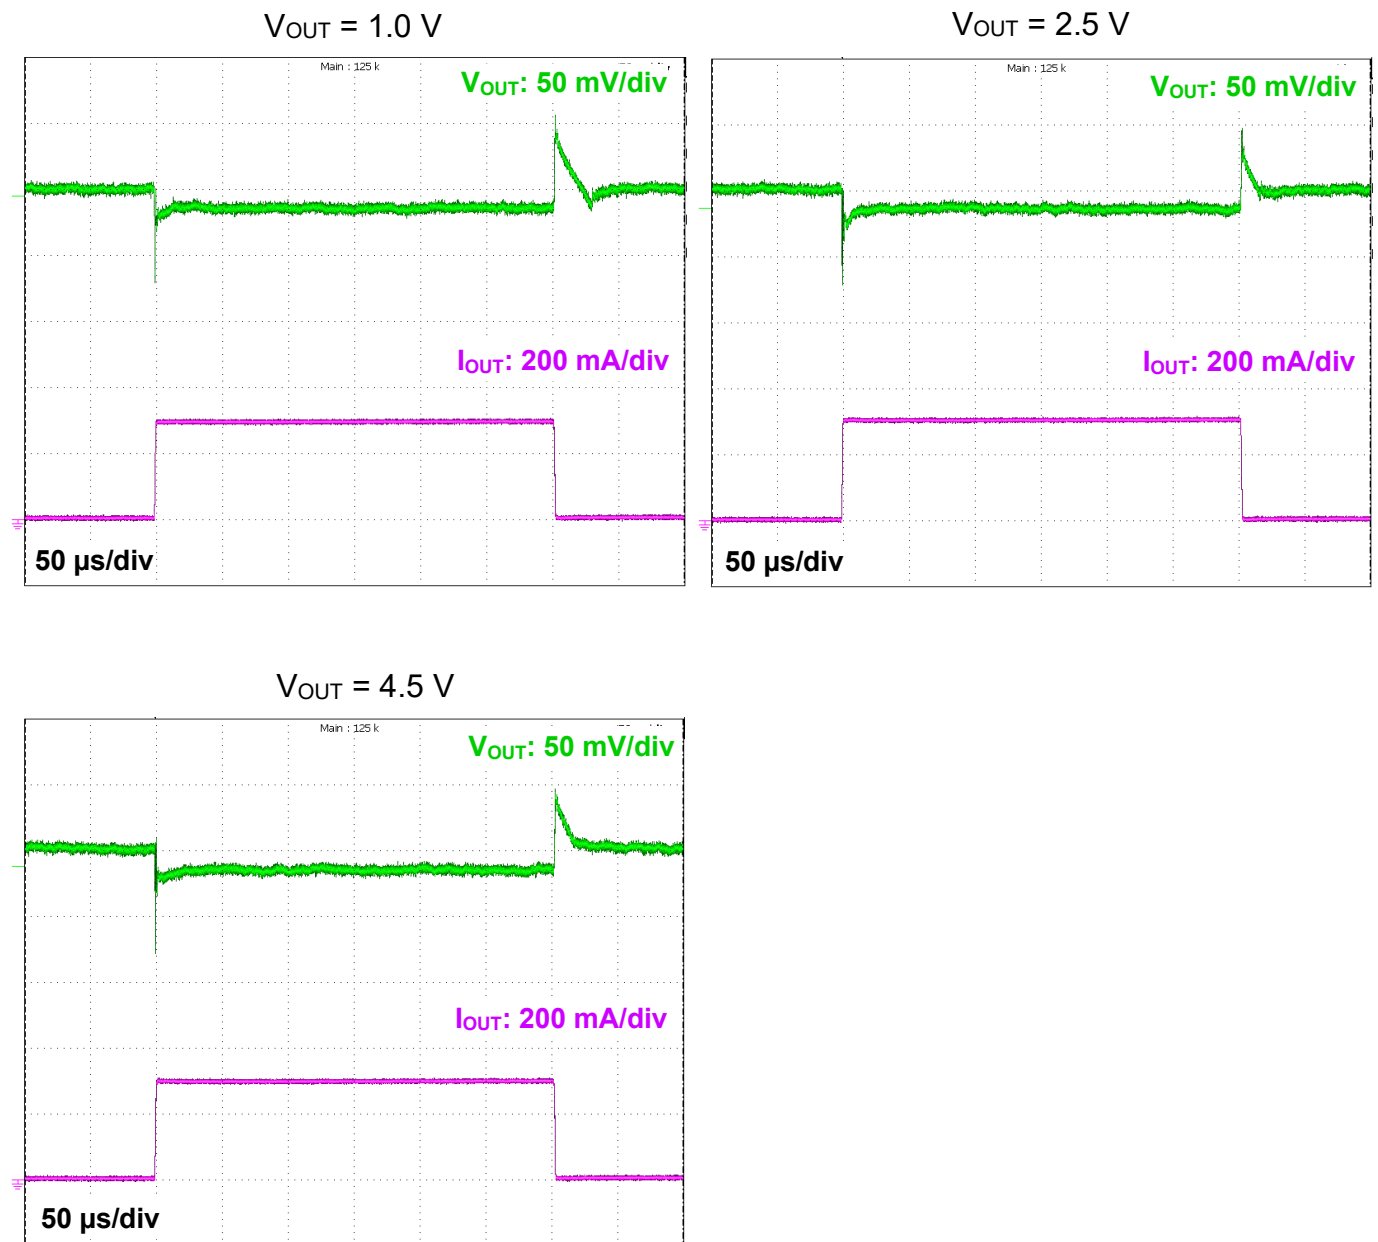



Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

### 12.8. $t_{ON}$ / $t_{OFF}$ Response



( $C_{IN} = 1.0 \mu F$ ,  $C_{OUT} = 1.0 \mu F$ ,  $V_{IN} = V_{OUT} + 1.0 V$ ,  $V_{CT} = 0 V \Leftrightarrow 1.0 V$ ,  $T_a = 25^\circ C$ )

- $I_{OUT} = 0 mA$



$V_{OUT} = 1.0 V$

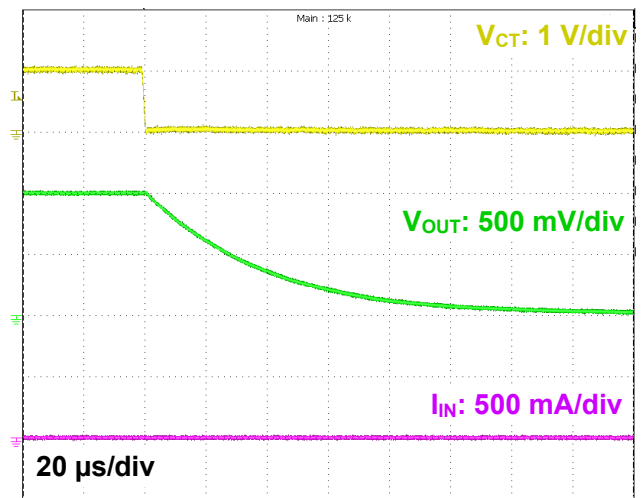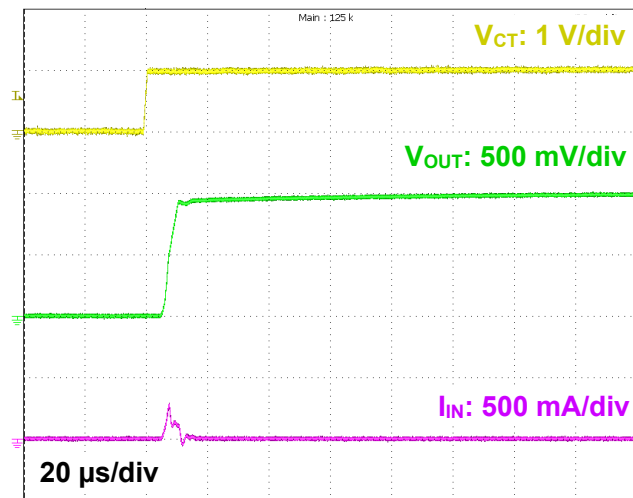

$V_{OUT} = 2.5 V$

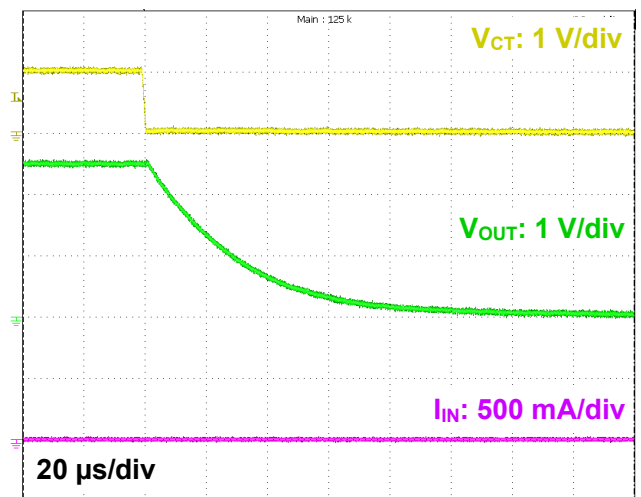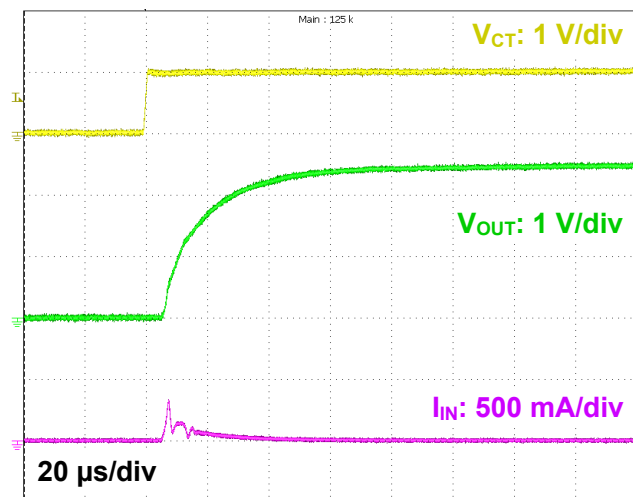

$V_{OUT} = 4.5 V$

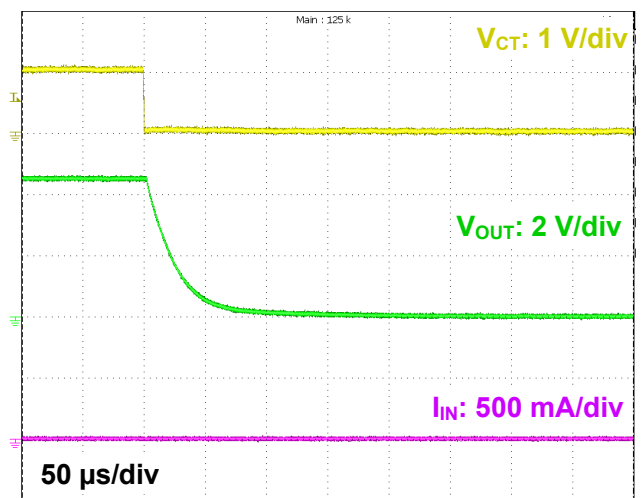
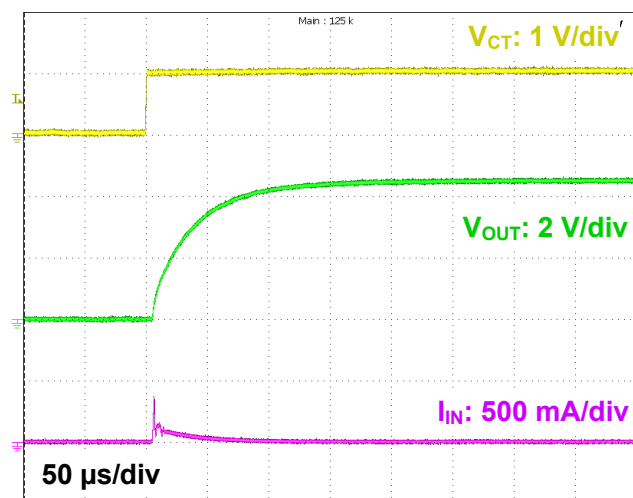


Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.





●  $I_{OUT} = 300\text{ mA}$



$V_{OUT} = 1.0\text{ V}$

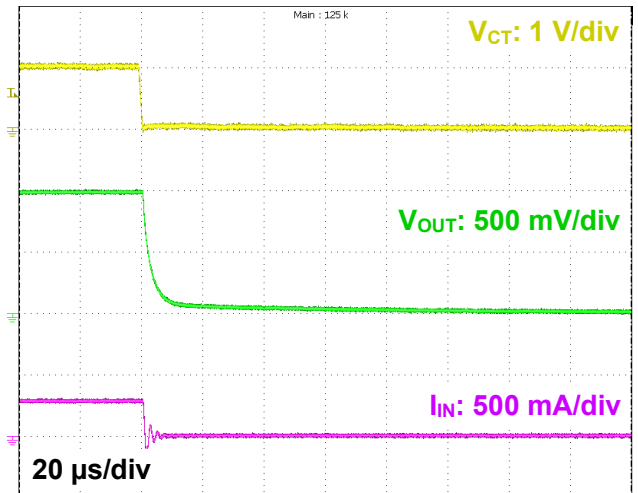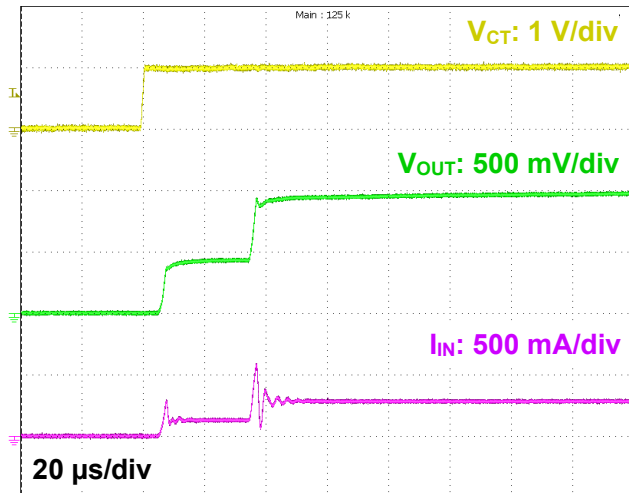

$V_{OUT} = 2.5\text{ V}$

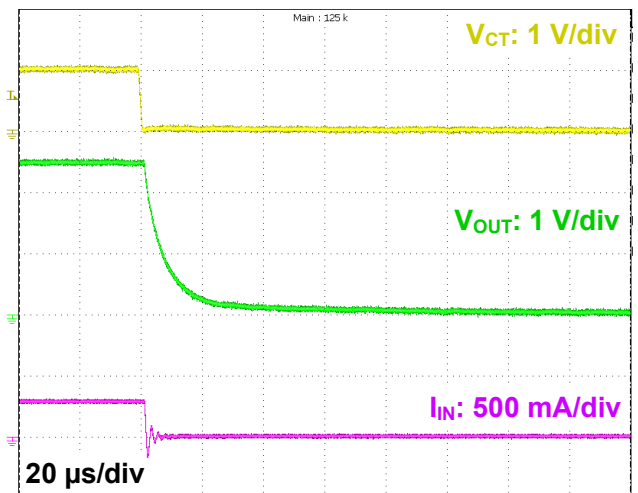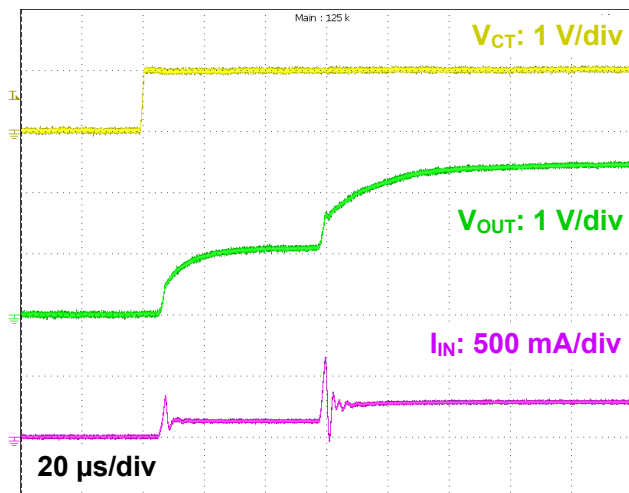

$V_{OUT} = 4.5\text{ V}$

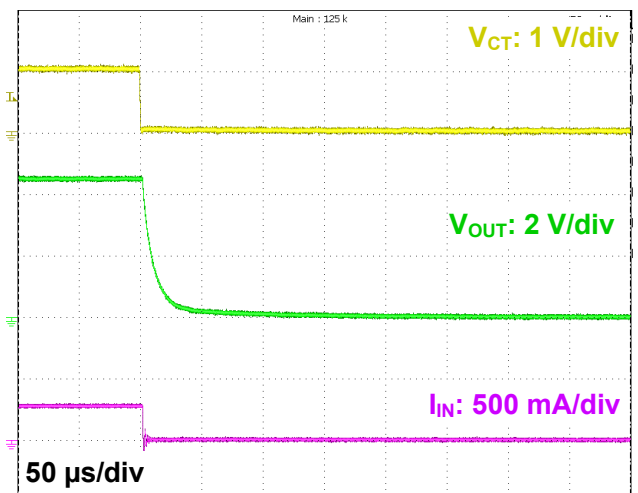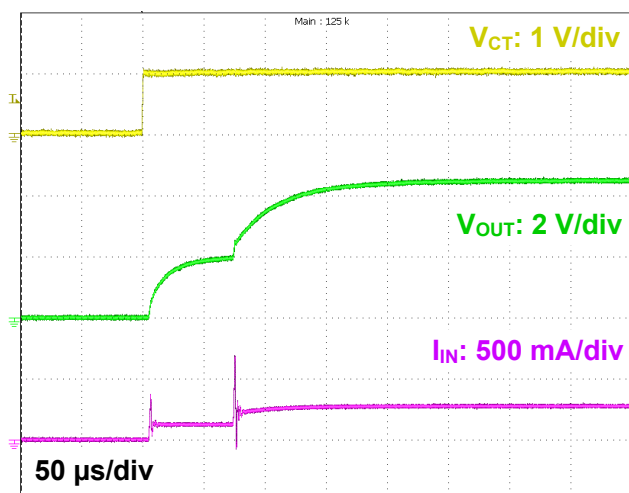


Note: The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

## 13. Package Information

DFN4D


Unit: mm

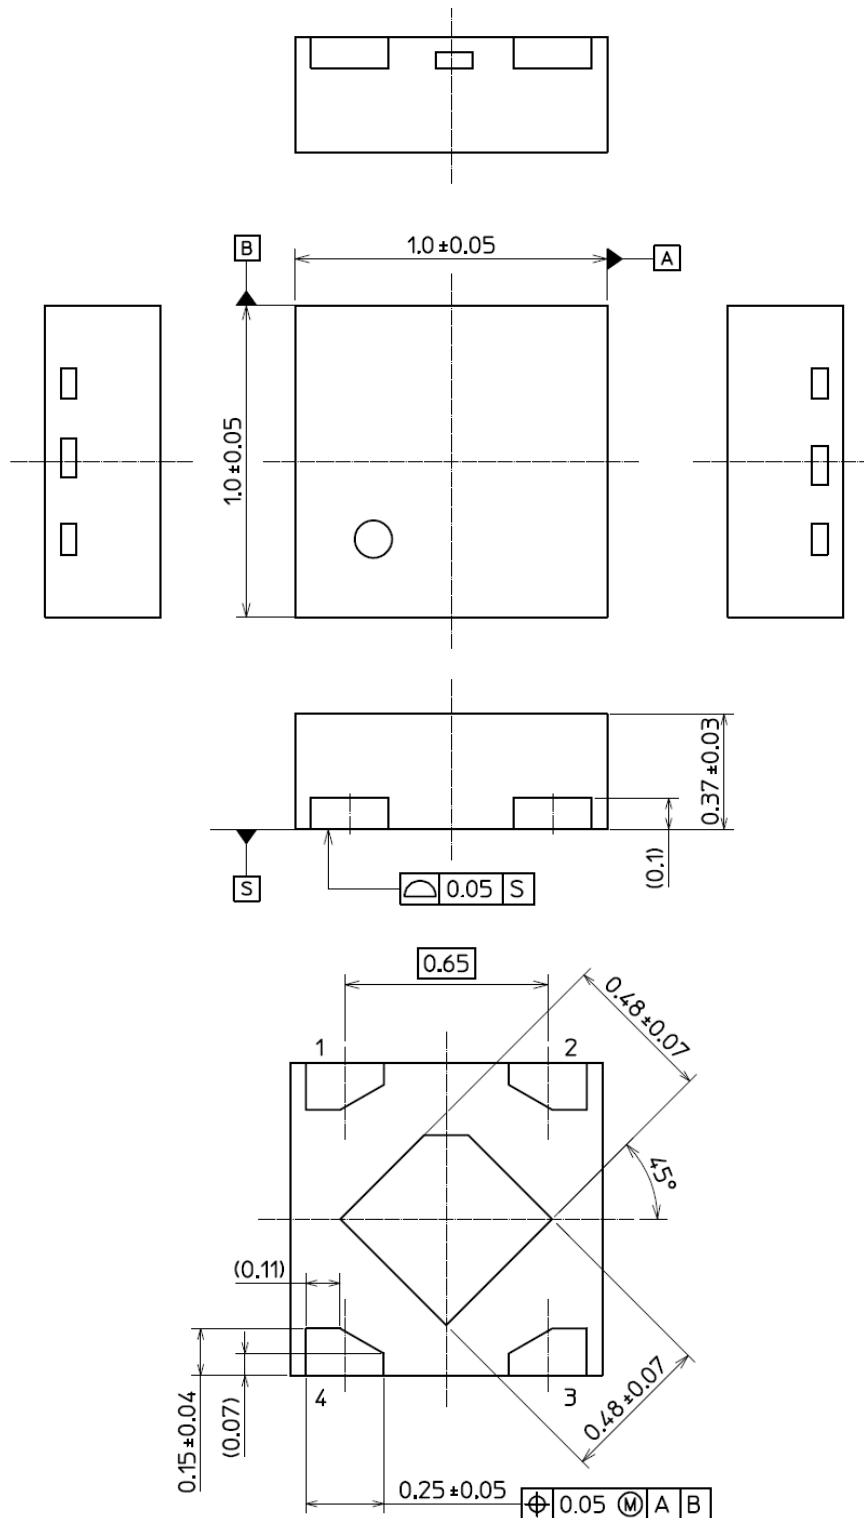

Weight: 1.1 mg (typ.)

#### 14. Land Pattern Dimensions (for reference only)

Unit: mm

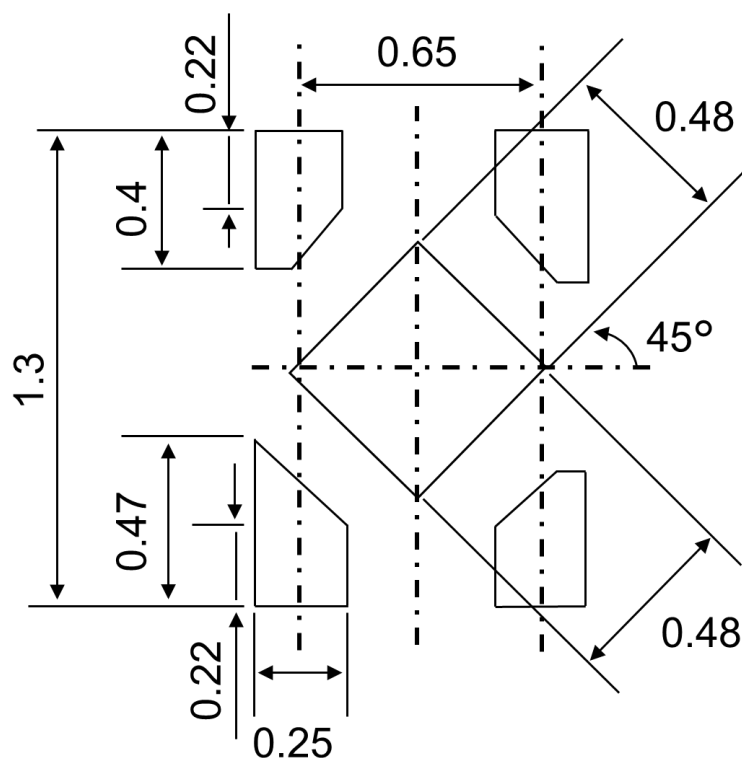

## RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

**Toshiba Electronic Devices & Storage Corporation**

<https://toshiba.semicon-storage.com/>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LDO Voltage Regulators](#) category:*

*Click to view products by [Toshiba](#) manufacturer:*

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#)  
[NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [LP2951CN](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#)  
[AZ1117ID-ADJTRG1](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [AP7315-33SA-7](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#)  
[NCV8623MN-50R2G](#) [NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#) [NCP715MX30TBG](#) [NCV8702MX25TCG](#)  
[L974113TR](#) [TLE7270-2E](#) [NCV562SQ25T1G](#) [AP2202K-2.6TRE1](#) [NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#) [NCP700CMT45TBG](#)  
[AP7315-33W5-7](#) [LD56100DPU28R](#) [NCP154MX180300TAG](#) [AP2113AMTR-G1](#) [NJW4104U2-33A-TE1](#) [MP2013AGG-5-P](#)  
[NCV8775CDT50RKG](#) [NJM2878F3-45-TE1](#) [S-1313D18-N4T1U4](#) [AP7343D-31FS4-7B](#) [AP7315D-33FS4-7B](#) [AP7315-30W5-7](#) [AZ1117ID-](#)  
[1.2TRG1](#) [XC6215B3027R-G](#) [XC6216C201MR-G](#) [XC6504A2019R-G](#)