




A202 Line Splitter

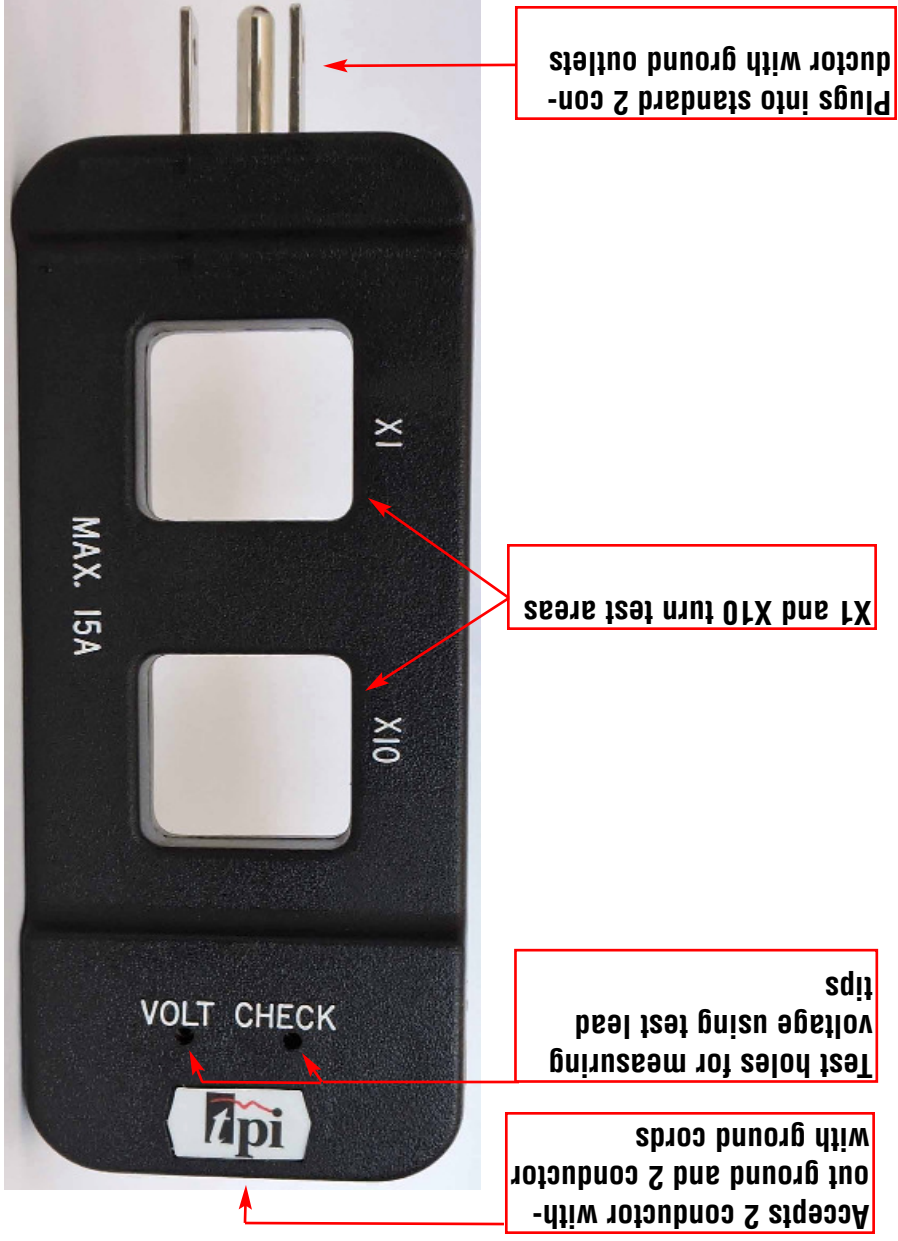

Specifications

Operating Voltage: 130V AC maximum
Operating Amperage: 15A AC maximum
Male Receptacle: Plugs into standard 2 conductor with ground outlets
Female Receptacle: Accepts 2 conductor without ground and 2 conductor with ground cords.

Features

- Enables clamp on meter amperage tests to be performed on devices with power cords without altering the cord.
- Can be used on 2 conductor no ground and 2 conductor with ground cords.
- X1 and X10 turn test areas
- Use the X10 test hole to measure smaller amperage. For example, 0.5A will be amplified to 5A for easier measurement and display on a clamp on meter
- Test holes for measuring voltage using test lead tips.

Dimensions

Size: 6" X 2.1" X 1.0" (152mm x 53mm x 25mm)
Weight: 0.4lbs (181g)

Copyright © 2015 Test Products International, Inc.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [tpi manufacturer](#):

Other Similar products are found below :

[3M201-NB](#) [TLS2021](#) [TPI-4023WIFI](#) [3M301R-NB](#) [635](#) [A006](#) [50](#) [TLS2030](#) [A402](#) [510](#) [105-52-000](#) [565C1](#) [TPI-4022](#) [A202](#) [TPI-4024WIFI](#)
[120086](#) [F6-50B](#) [59-1200-1M](#) [505](#) [TPI-5000A](#) [F6-75B](#) [A900](#) [62-024-1M](#) [A403](#) [TLS2011](#) [A401](#) [LEADRACK](#) [59-600-1M](#) [F6-25B](#) [FX13B](#)
[59-060-1M](#) [3M701-NB](#) [F6-6B](#) [TPI-3000A](#) [3C350-NB](#) [LEADRACKSM](#) [59-180-1M](#) [59-048-1M](#) [59-024-1M](#) [A057](#) [A345](#) [58-900-1M](#)
[FK26M](#) [58-1200-1M](#) [59-120-1M](#) [58-600-1M](#) [A346](#) [A044](#) [A039](#) [59-300-1M](#)