


Features

- ◆ Ultra-wide 4:1 input range
9 – 36 VDC or 18 – 75 VDC
- ◆ Full SMD design
- ◆ High efficiency up to 85 %
- ◆ Indefinite short circuit protection
- ◆ Reverse voltage protection
- ◆ I/O isolation 1'500 VDC
- ◆ Input filter meets EN 55022, Class A and FCC, Level A without external components
- ◆ Shielded metal case with insulated baseplate
- ◆ 24-pin DIP with industry standard pinout
- ◆ MTTF >1 Mio. h
- ◆ 3-year product warranty

not recommended for new design in

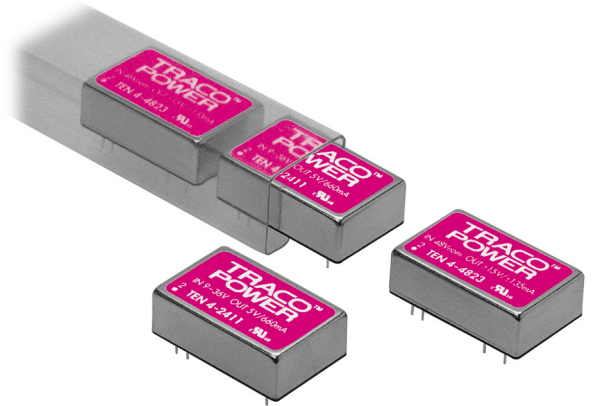

The TEN 4 series DC/DC converter is designed for applications requiring very wide operating voltage range. Typical applications are tele- and data communication systems, mobile battery powered equipments and industrial process control systems with operation from different input voltages i.e. 12/24 VDC or 24/48 VDC battery voltages. High efficiency allows operation up to +75°C at full load. Input filtering according to EN 55022-A and FCC, level A. Low output ripple minimises design-in time and cost.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 4-2410	9 – 36 VDC (24 VDC nominal)	3.3 VDC	900 mA	77 %
TEN 4-2411		5 VDC	660 mA	81 %
TEN 4-2412		12 VDC	330 mA	83 %
TEN 4-2413		15 VDC	265 mA	83 %
TEN 4-2421		±5 VDC	±300 mA	80 %
TEN 4-2422		±12 VDC	±165 mA	83 %
TEN 4-2423		±15 VDC	±130 mA	83 %
TEN 4-4810	18 – 75 VDC (48 VDC nominal)	3.3 VDC	900 mA	78 %
TEN 4-4811		5 VDC	660 mA	82 %
TEN 4-4812		12 VDC	330 mA	85 %
TEN 4-4813		15 VDC	265 mA	85 %
TEN 4-4821		±5 VDC	±300 mA	82 %
TEN 4-4822		±12 VDC	±165 mA	85 %
TEN 4-4823		±15 VDC	±130 mA	85 %

Input Specifications

Input current no load / full load	24 Vin models	20 mA typ. / 400 mA typ. (at 12 VDC Vin) 20 mA typ. / 200 mA typ. (at 24 VDC Vin)
	48 Vin models	6 mA typ. / 200 mA typ. (at 24 VDC Vin) 6 mA typ. / 100 mA typ. (at 48 VDC Vin)
Start-up voltage / under voltage shut down	24 Vin models	8.5 VDC / 8.0 VDC typ.
	48 Vin models	17 VDC / 16 VDC typ.
Surge voltage (1 sec. max.)	24 Vin models	50 V max.
	48 Vin models	100 V max.
Reverse voltage protection		1.0 A max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A

Output Specifications

Voltage set accuracy		±1.0 %
Regulation	– Input variation Vin min. to Vin max.	0.3 % max.
	– Load variation 10 – 100 %	
	single output models	1.0 % max.
	dual output models	1.0 % max. balanced load 3.0 % max. unbalanced load
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.
Temperature coefficient		±0.02 %/K
Current limitation		>110 % of Iout max., constant current
Short circuit protection		Hiccup mode, indefinite (automatic recovery)
Capacitive load	– Single output models	3000 µF max.
	– Dual output models	680 µF max.

General Specifications


Temperature ranges	– Operating	–40°C to +75°C
	– Casing temperature	+95°C max.
	– Storage	–40°C to +125°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTTF (MIL-HDBK-217F @ +25°C, ground benign)		>1 Mio. h
Isolation voltage (60 sec.)	– Input/Output	1'500 VDC
Isolation capacity	– Input/Output	380 pF typ.
Isolation resistance	– Input/Output (500 VDC)	>1'000 M Ohm
Switching frequency		350 kHz typ. (Pulse frequency modulation PFM)
Safety standards		UL 1950 , IEC/EN 60950 Compliance up to 60 VDC input voltage (SELV limit)
Safety approvals	– UL/cUL	www.ul.com > UL File no.: E188913

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	Steel chrome-nickel plated
Baseplate material	Epoxy
Potting material	Silicon rubber TSE (UL 94V-0 rated)
Weight	16.2 g (0.57 oz)
Soldering temperature	max. 265°C / 10 sec.

Outline Dimensions

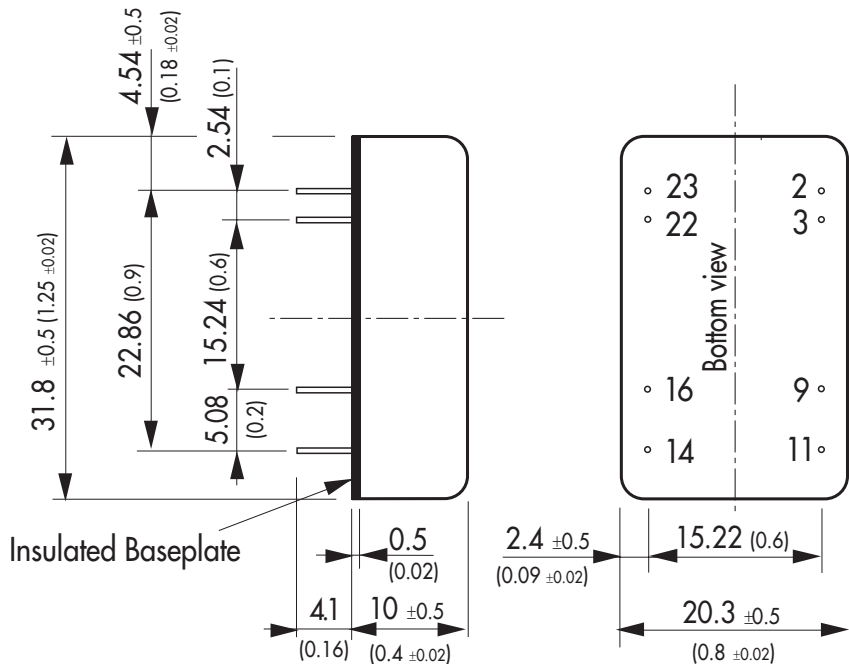

Pin-Out		
Pin	Single	Dual
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No pin	Common
11	No function	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], () = Inch
 Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 \pm 0.002)
 Tolerances ± 0.5 (± 0.02)
 Pin pitch tolerances ± 0.35 (± 0.014)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [CE-1003](#) [CE-1004](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#)
[XGS-1205](#) [06322](#) [SPB05B-15](#) [L-DA20](#) [DCG40-5G](#) [XKS-2405](#) [DPA423R](#) [vi-m13-cw-03](#) [VI-L53-CV](#) [24IBX15-50-0ZG](#) [HZZ01204-G](#)
[SPU02L-09](#) [SPU02M-09](#) [SPU02N-09](#) [QUINT4-BUFFER/24DC/40](#) [QUINT4-CAP/24DC/5/4KJ](#) [73-551-5039I](#) [DFC15U48D15G](#) [SEN-6471-](#)
[1EM](#) [AHV2815DF/HBB](#) [MI-LC21-IX](#) [PAH-48/8.5-D48NB1-C](#) [BM3020-7A](#) [QRS2050P025K00](#) [CM2320-9EG](#) [SKMW15F-05](#)
[V300A28H400BF3](#) [TEN 15-1223](#) [TEQ 100-2418WIR](#) [TEQ 160-7218WIR](#) [R05C05TE05S-R](#) [HQA2W085W033V-N07-S](#) [AM1SS-2405SJZ](#)
[AM2DS-1224SJZ](#) [AM2DS-2405DJZ](#) [AM10SBO-4824SNZ-B](#) [AM15E-2405S-NZ](#) [AM2DS-1212SJZ](#) [AM30SBO-4805SNZ-B](#)
[LT8301ES5#WTRPBF](#)