


- **Highest power density:**
50 W in 1" x 2" x 0.4" package
- **Excellent efficiency up to 92 %**
- **Operating temperature range**
-40°C to +85°C
- **Output voltage adjustable**
- **Remote On/Off**
- **I/O isolation 1500 VDC**
- **3-year product warranty**

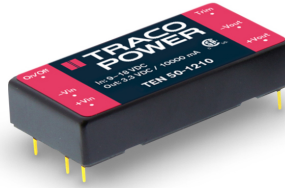

UL 62368-1 IEC 62368-1

The TEN 50 Series is a range of isolated high performance DC/DC converter modules. Due to the very high efficiency of up to 92% and the use of highest reliable components these 50 W converters come with a footprint of only 1.0" x 2.0". The 12 models have a wide 2:1 input voltage range and a tight output voltage regulation. They do not need a minimum load and offer a high efficiency also at low load conditions. The output voltage is adjustable by external resistor. Remote On/Off and protection against overload and short circuit are standard features of these converters. Typical applications are in mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on the PCB is critical.

Models

Order Code	Input Voltage Range	Output Voltage nom.	Output Current max.	Efficiency typ.
TEN 50-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	10'000 mA	89 %
TEN 50-1211		5 VDC	10'000 mA	90 %
TEN 50-1212		12 VDC	4'170 mA	91 %
TEN 50-1213		15 VDC	3'330 mA	91 %
TEN 50-1215		24 VDC	2'080 mA	91 %
TEN 50-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	10'000 mA	89 %
TEN 50-2411		5 VDC	10'000 mA	92 %
TEN 50-2412		12 VDC	4'170 mA	92 %
TEN 50-2413		15 VDC	3'330 mA	92 %
TEN 50-2415		24 VDC	2'080 mA	91 %
TEN 50-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	10'000 mA	89 %
TEN 50-4811		5 VDC	10'000 mA	92 %
TEN 50-4812		12 VDC	4'170 mA	92 %
TEN 50-4813		15 VDC	3'330 mA	92 %
TEN 50-4815		24 VDC	2'080 mA	91 %

Options

TEN-HS6	- Optional Heat Sink: www.tracopower.com/products/ten-hs6.pdf
---------	--

Input Specifications

Input Current	- At no load	12 Vin models: 85 mA typ. (3.3 Vout model) 110 mA typ. (5 Vout model) 160 mA typ. (12 Vout model) 160 mA typ. (15 Vout model) 250 mA typ. (24 Vout model)
		24 Vin models: 50 mA typ. (3.3 Vout model) 70 mA typ. (5 Vout model) 85 mA typ. (12 Vout model) 85 mA typ. (15 Vout model) 110 mA typ. (24 Vout model)
		48 Vin models: 35 mA typ. (3.3 Vout model) 45 mA typ. (5 Vout model) 50 mA typ. (12 Vout model) 50 mA typ. (15 Vout model) 60 mA typ. (24 Vout model)
	- At full load	12 Vin models: 3'090 mA typ. (3.3 Vout model) 4'630 mA typ. (5 Vout model) 4'580 mA typ. (12 Vout model) 4'580 mA typ. (15 Vout model) 4'570 mA typ. (24 Vout model)
		24 Vin models: 1'550 mA typ. (3.3 Vout model) 2'260 mA typ. (5 Vout model) 2'260 mA typ. (12 Vout model) 2'260 mA typ. (15 Vout model) 2'290 mA typ. (24 Vout model)
		48 Vin models: 770 mA typ. (3.3 Vout model) 1'130 mA typ. (5 Vout model) 1'130 mA typ. (12 Vout model) 1'130 mA typ. (15 Vout model) 1'150 mA typ. (24 Vout model)
Surge Voltage		12 Vin models: 25 VDC max. (100 ms max.) 24 Vin models: 50 VDC max. (100 ms max.) 48 Vin models: 100 VDC max. (100 ms max.)
Under Voltage Lockout		12 Vin models: 8.3 VDC typ. 24 Vin models: 16.5 VDC typ. 48 Vin models: 33 VDC typ.
Reflected Ripple Current		12 Vin models: 50 mA_{p-p} typ. 24 Vin models: 40 mA_{p-p} typ. 48 Vin models: 30 mA_{p-p} typ.
Recommended Input Fuse		12 Vin models: 10'000 mA (slow blow) 24 Vin models: 5'000 mA (slow blow) 48 Vin models: 2'500 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal LC-Type

Output Specifications

Output Voltage Adjustment		-10% to +20% (24 Vout models) ±10% (other single models) (By external trim resistor)
		See application note: www.tracopower.com/overview/ten50 Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	0.5% max.
	- Load Variation (0 - 100%)	0.5% max.

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Ripple and Noise (20 MHz Bandwidth)	3.3 Vout models: 100 mVp-p max. (w/ 1 μ F MLCC // 10 μ F TC) 5 Vout models: 100 mVp-p max. (w/ 1 μ F MLCC // 10 μ F TC) 12 Vout models: 150 mVp-p max. (w/ 1 μ F MLCC // 10 μ F TC) 15 Vout models: 150 mVp-p max. (w/ 1 μ F MLCC // 10 μ F TC) 24 Vout models: 150 mVp-p max. (w/ 1 μ F MLCC // 10 μ F TC)
Capacitive Load	3.3 Vout models: 25'800 μF max. 5 Vout models: 17'000 μF max. 12 Vout models: 2'900 μF max. 15 Vout models: 1'900 μF max. 24 Vout models: 750 μF max.
Minimum Load	Not required
Temperature Coefficient	± 0.02 %/K max.
Start-up Time	30 ms max. (Power On) 30 ms max. (Remote On)
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	150% typ. of Iout max.
Transient Response	- Response Deviation 3% typ. / 5% max. (75% to 100% Load Step) - Response Time 250 μs typ. (75% to 100% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	CSA-C22.2, No. 60950-1 EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1 www.tracopower.com/overview/ten50
	- Certification Documents	
Pollution Degree		PD 3
Over Voltage Category		Not mains connected

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter) FCC Part 15 class A (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) FCC Part 15 class A (with external filter)
		External filter proposal: www.tracopower.com/overview/ten50
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, ± 8 kV, perf. criteria A
	- RF Electromagnetic Field	Contact: EN 61000-4-2, ± 6 kV, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: KXG 330 μF, 100 V EN 61000-4-6, 10 Vrms, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +85°C +105°C max. -50°C to +125°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/ten50
Over Temperature Protection Switch Off	- Protection Mode	110°C typ.
Cooling System		Natural convection (20 LFM)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Remote Control	- Voltage Controlled Remote - Off Idle Input Current - Remote Pin Input Current	On: 3.5 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 2.5 mA typ. -0.5 to 0.5 mA
Altitude During Operation		6'000 m max.
Switching Frequency		285 kHz typ. (PWM) (24 Vout models) 320 kHz typ. (PWM) (other models)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s - Input to Output, 1 s	1'500 VDC 1'800 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'200 pF max.
Reliability	- Calculated MTBF	220'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Allowed (hermetical product) See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf
Housing Material		Alu alloy, black anodized coating
Base Material		Non-conductive FR4 (UL 94 V-0 rated)
Potting Material		Epoxy (UL 94 V-0 rated)
Pin Material		Copper Alloy (C6801)
Pin Foundation Plating		Nickel (2.5 μm min.)
Pin Surface Plating		Gold (75 - 125 nm), glossy
Housing Type		Metal Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		2" x 1"
Soldering Profile		Wave Soldering 260°C / 10 s max.
Weight		30 g
Thermal Impedance		12 K/W 10 K/W (with Heat Sink)
Environmental Compliance	- REACH Declaration - RoHS Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/ten50

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

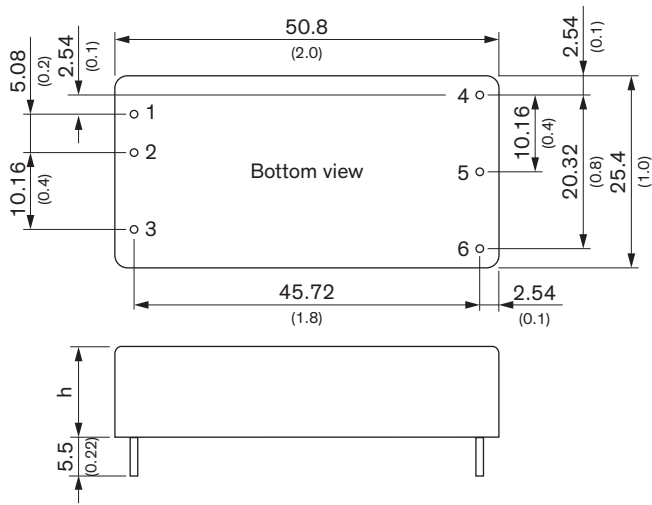

Dimensions in mm (inch)
 Pin diameter: 1.0 ±0.05 (0.04 ±0.002)
 Tolerances: x.x ±0.25 (x.xx ±0.01)
 x.xx ±0.13 (x.xxx ±0.005)

Pinout	
Pin	Single
1	+Vin (Vcc)
2	-Vin (GND)
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[581102B00000G](#) [656-15ABPE](#) [657-20ABPNE](#) [7020B-TC12-MTG](#) [73452PPBA](#) [7G0011A](#) [PF720G](#) [A22-4026](#) [120-1873-007](#) [HAH10L](#)
[HAH15L](#) [1542616-1](#) [HS-2506-F1](#) [HS-87M0-F2](#) [218-40CTE3](#) [231-69PAB-15V](#) [25-7520](#) [SW50-4G](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-](#)
[122ABE-22](#) [PSC22CB](#) [HAF10L](#) [HAQ10T](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [32438](#) [TX0506-1B](#) [TX1806B](#) [LAE66A3CB](#) [WA-DT2-](#)
[101E](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [7G0047C](#) [COMX-440-HSP](#) [510-12M](#) [D10650-40T5](#) [V8511 Y](#) [APF40-40-13CB/A01](#)
[780653U04500G](#) [ATS-54310K-C2-R0](#) [FK 216 CB SA](#) [FK 231 SA 220](#) [648-51AB](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [FK 212 CB SA](#)