


- Chassis mount with screw terminal block
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Very high efficiency up to 93%
- No minimum load
- Soft start
- Adjustable output voltage +10/-20%
- Sense line
- Remote On/Off input
- Under voltage lock-out circuit

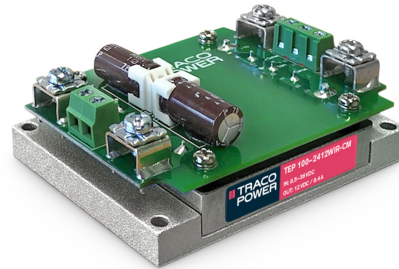

The TEP 100WIR Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges which come in a rugged, sealed industry standard half brick package. A very high efficiency allows full power operation without forced air cooling at 60°C This temperature can be increased to 70°C with optional mounted heatsink or up to 85°C when mounted on an iron base plate. The very wide input voltage range make these converters interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for on board power distribution.

Options

TEP-MK1	- Optional DIN-Rail Mounting Kit: www.tracopower.com/products/tep-mk1.pdf
<p>on demand (backorder with MOQ non stocking item)</p>	<ul style="list-style-type: none"> - Optional model with 3.3 VDC / 25'000 mA Output and 9 - 36 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 9 - 36 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 9 - 36 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 9 - 36 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 9 - 36 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 9 - 36 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 9 - 36 VDC Input - Optional model with 3.3 VDC / 25'000 mA Output and 18 - 75 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 18 - 75 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 18 - 75 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 18 - 75 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 18 - 75 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 18 - 75 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 18 - 75 VDC Input - Optional model with 3.3 VDC / 25'000 mA Output and 43 - 160 VDC Input - Optional model with 5 VDC / 20'000 mA Output and 43 - 160 VDC Input - Optional model with 12 VDC / 8'400 mA Output and 43 - 160 VDC Input - Optional model with 15 VDC / 6'700 mA Output and 43 - 160 VDC Input - Optional model with 24 VDC / 4'200 mA Output and 43 - 160 VDC Input - Optional model with 28 VDC / 3'600 mA Output and 43 - 160 VDC Input - Optional model with 48 VDC / 2'100 mA Output and 43 - 160 VDC Input - Inverse Remote On/Off function (passive = off)

Input Specifications

Input Current	- At no load	24 Vin models: 20 mA typ. 48 Vin models: 15 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 185 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.3 VDC min. / 7.5 VDC typ. / 8.1 VDC max. 48 Vin models: 15.5 VDC min. / 16 VDC typ. / 16.3 VDC max. 110 Vin models: 33 VDC min. / 34.5 VDC typ. / 36 VDC max.
Recommended Input Fuse		24 Vin models: 20'000 mA (fast acting) 48 Vin models: 12'000 mA (fast acting) 110 Vin models: 5'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-20% to +10% (By external trim resistor) See application note: www.tracopower.com/overview/tep100wircm Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%)	0.1% max. 0.1% max.
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 5 Vout models: 75 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 12 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 15 Vout models: 100 mVp-p max. (w/ 1 µF X7R // 22 µF poscap) 24 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 28 Vout models: 200 mVp-p max. (w/ 4.7 µF X7R) 48 Vout models: 300 mVp-p max. (w/ 2.2 µF X7R)
Capacitive Load		3.3 Vout models: 75'700 µF max. 5 Vout models: 40'000 µF max. 12 Vout models: 7'000 µF max. 15 Vout models: 4'460 µF max. 24 Vout models: 1'750 µF max. 28 Vout models: 1'280 µF max. 48 Vout models: 430 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		75 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		150% typ. of Iout max. (110 Vin models) 120 - 150% (other models)
Overvoltage Protection		115 - 130% of Vout nom.
Transient Response	- Response Time	200 µs typ. / 250 µs max. (25% Load Step)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1 EN 50155
	- Railway Applications - Certification Documents	www.tracopower.com/overview/tep100wircm

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/tep100wircm
EMS Immunity	- Electrostatic Discharge	EN 50155 (Railway Applications) EN 55024 (IT Equipment)
	- RF Electromagnetic Field - EFT (Burst) / Surge	Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
		Ext. input component: 24 Vin models: 2 x KY 220 µF 48 Vin models: 2 x KY 220 µF 110 Vin models: 2 x KXJ 150 µF
		Continuous: EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity	95% max. (non condensing)	
Temperature Ranges	- Operating Temperature	-40°C to +75°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-40°C to +105°C
Power Derating	- High Temperature	See application note: www.tracopower.com/overview/tep100wircm
Over Temperature Protection Switch Off	- Protection Mode - Measurement Point	115°C typ. (Automatic recovery at 105°C typ.) Base-Plate
Cooling System	Natural convection (20 LFM)	
Sense Function	10% max. of Vout nom.	
Remote Control	- Voltage Controlled Remote	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin 3 mA typ. -0.5 to 1.0 mA (Optional models with inverse logic available)
	- Off Idle Input Current - Remote Pin Input Current	
Altitude During Operation	2'000 m max. (for reinforced insulation) 5'000 m max. (for functional insulation)	
	Switching Frequency	300 kHz typ. (PWM) (±10%, 110 Vin models) 250 kHz typ. (PWM) (±10%, other models)
Insulation System	Reinforced Insulation	
Working Voltage (rated)	177 VAC (110 Vin models)	
	145 VAC (24 and 48 Vin, 3.3 and 5 Vout models)	
	185 VAC (24 and 48 Vin, 48 Vout models)	
	172 VAC (24 and 48 Vin, other output models)	

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC (110 Vin models) 3'000 VDC (other models)
	- Input to Case, 60 s	1'500 VAC (110 Vin models) 1'600 VDC (other models)
	- Output to Case, 60 s	1'500 VAC (110 Vin models) 1'600 VDC (other models)
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	409'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	MIL-STD-810F EN 61373
	- Mechanical Shock	MIL-STD-810F EN 61373
	- Thermal Shock	MIL-STD-810F EN 50155
Housing Material		Alu base-plate w. metal case (24 and 48 Vin models) Alu base-plate w. plastic case (110 Vin models)
	Base Material	Non-conductive FR4 (UL 94 V-0 rated) (24 and 48 Vin models only)
Potting Material		Silicone (UL 94 V-0 rated)
Housing Type		Metal Case (24 and 48 Vin models) Plastic Case (110 Vin models)
	Mounting Type	Chassis Mount
Connection Type		Screw Terminal
Weight		235 g
Thermal Impedance		6.7 K/W
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)
	- Flammability (EN 45545-2)	www.tracopower.com/info/en45545-declaration.pdf


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tep100wircm

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

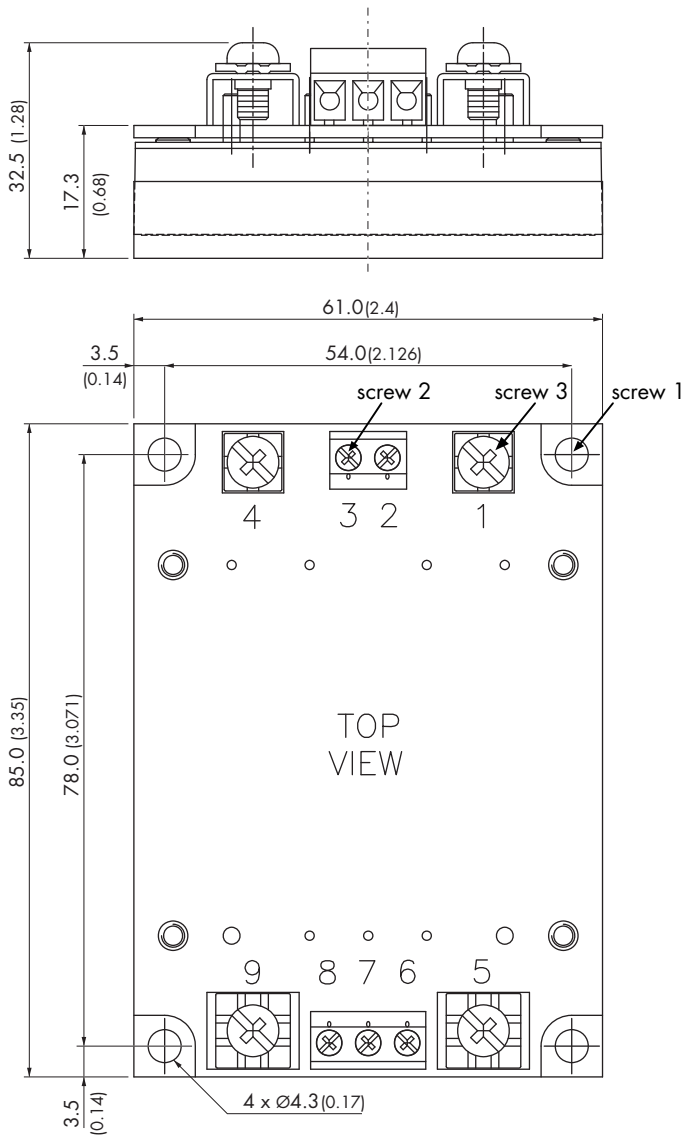

Dimensions in mm (inch)
 Tolerances $x.xx \pm 0.5$ (± 0.02)
 Mounting hole pitch tolerances ± 0.25 (± 0.01)

Screw 3:
 Type M4
 Head diameter 6.88 (0.271)
 Rated current: 15 A

Pinout	
Pin	Function
1	-Vin (GND)
2	NC
3	Remote
4	+Vin (Vcc)
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NC: No Connection

The screw 1 locked torque:
 MAX 11.2kgf-cm/1.14N-m

The screw 2 locked torque:
 MAX 5.2kgf-cm/0.51N-m

The screw 3 locked torque:
 MAX 12.0kgf-cm/1.18N-m

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)