

Features

- ◆ Supplementary and reinforced insulation
- ◆ I/O isolation 4000 VACrms rated for 300 Vrms working voltage
- ◆ Unregulated device
- ◆ 2 x MOOP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- ◆ Industrial safety to UL/IEC/EN 60950-1
- ◆ Ultracompact SMD-package
- ◆ Operating temp. range -25°C to +80°C
- ◆ Qualified for leadfree reflow solder process
- ◆ Available in tape & reel package
- ◆ 3-year product warranty

CB
 Scheme
 IEC 60950-1 UL 60950-1
 IEC 60601-1 ES 60601-1



The TES 2M series is range of compact 2W DC/DC-converters providing a high I/O-isolation voltage of 4000 VAC. With a reinforced I/O-isolation system this product is an economical solution for many applications in instrumentation, industrial controls, medical equipment and everywhere where supplementary- or reinforced insulation is required.

These converters are qualified for high solder temperature profiles in leadfree solder processes. For automated SMD production lines the devices can be supplied in tape & reel package. Full SMD-design with exclusive use of ceramic capacitors ensure a very high reliability and a long product lifetime.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TES 2-0511M	5.0 VDC ±10% (nominal 0.5 VDC)	5 VDC	400 mA	66 %
TES 2-0512M		12 VDC	165 mA	66 %
TES 2-0513M		15 VDC	133 mA	66 %
TES 2-0522M		±12 VDC	±83 mA	72 %
TES 2-0523M		±15 VDC	±66 mA	73 %
TES 2-1211M	12.0 VDC ±10% (nominal 1.2 VDC)	5 VDC	400 mA	66 %
TES 2-1212M		12 VDC	165 mA	66 %
TES 2-1213M		15 VDC	133 mA	66 %
TES 2-1222M		±12 VDC	±83 mA	74 %
TES 2-1223M		±15 VDC	±66 mA	75 %
TES 2-2411M	24 VDC ±10% (nominal 2.4 VDC)	5 VDC	400 mA	66 %
TES 2-2412M		12 VDC	165 mA	66 %
TES 2-2413M		15 VDC	133 mA	66 %
TES 2-2422M		±12 VDC	±83 mA	74 %
TES 2-2423M		±15 VDC	±66 mA	75 %

Input Specifications

Input current no load	5 Vin models: 60 mA typ. 12 Vin models: 30 mA typ. 24 Vin models: 15 mA typ.
Reverse voltage protection	0.3 A max.
Recommended input fuse (slow blow)	5 Vin models: 1.0 A 12 Vin models: 0.5 A 24 Vin models: 0.2 A
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Input filter	internal capacitors

Output Specifications

Voltage set accuracy	±4 %
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation 1.2 % / 1 % change of Vin – Load variation 20 – 100 % 10 % max. 12 % max. for 5 Vout models.
Ripple and noise (0–20 MHz Bandwidth)	150 mVp-p max.
Temperature coefficient	±0.02 %/K
Short circuit protection	0.5 sec. max. (automatic recovery)
Minimum load	2 % of rated max current.
Capacitive load	single output models: 330 µF max. dual output models: 100 µF max. (each output)

General Specifications

Temperature ranges	– Operating –25°C to +80°C – Storage –55°C to +125°C – Case temperature +90°C max.
Derating	2.5 %/K above 60°C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	>2.0 Mio h
Isolation voltage (50Hz, 60sec.) – Input/Output	4000 VACrms (reinforced)
Isolation test voltage (1 sec.)	6000 Vpk
Leakage current (at 240VAC, 60Hz)	2 µA max.
Isolation capacitance – Input/Output	20 pF max. (at 100KHz, 1V)
Isolation resistance – Input/Output	>10 Gohm (at 500VDC)
Safety approvals	IEC/EN 60950-1, IEC/EN 60601-1 3rd Edition, ANSI/AAMI ES60601-1 and CAN/CSA-C22.2 No. 60601-1, Medical Electrical Equipment - Part 1: General Requirements for Basic Safety and Essential Performance – Certification documents www.tracopower.com/overview/tes2m
Switching frequency	50 – 100 kHz (PFM)
Environmental compliance	– Reach www.tracopower.com/info/reach-declaration.pdf – RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	plastic
Pin material	phosphor bronze
Weight	3.8 g (0.13oz)
Lead-free reflow solder process	as per J-STD-020D.01 (to find at: www.jedec.org - free registration required)
Moisture sensitivity level (MSL)	level 2 as per J-STD-033B.01 (to find at: www.jedec.org - free registration required)


Supporting Documents: www.tracopower.com/overview/tes2m

Outline Dimensions

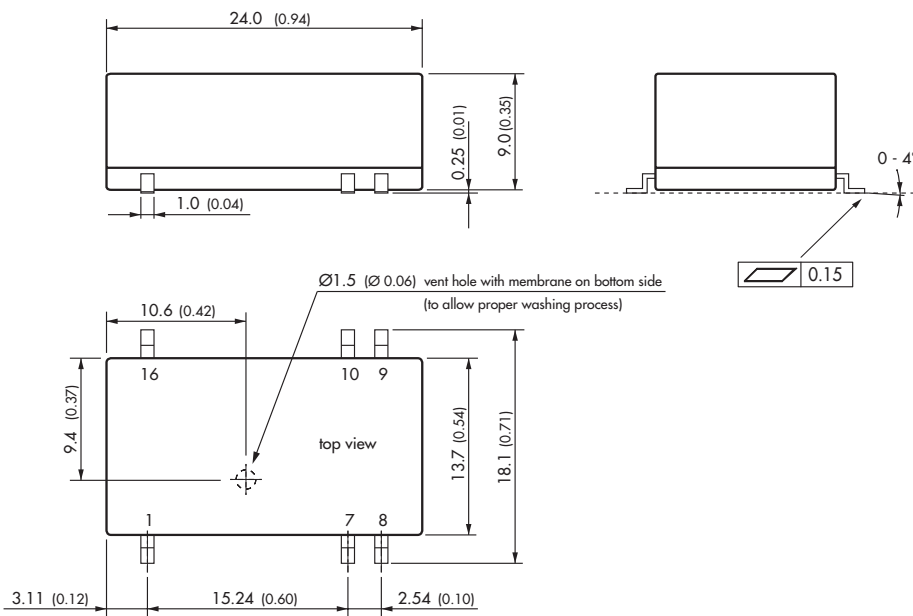

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Solder Pad Dimension

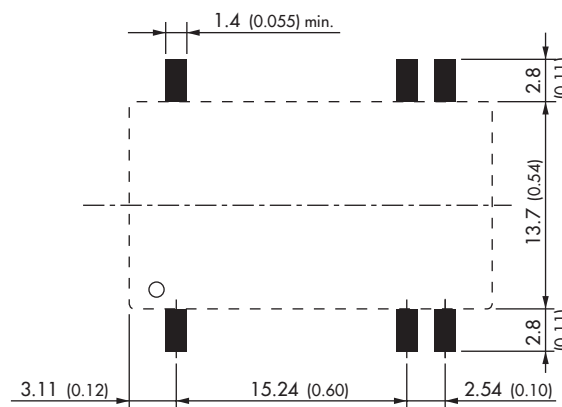

Dimensions in [mm], () = Inch
Tolerances ± 0.25 (± 0.01)
Pin pitch tolerances ± 0.05 (± 0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [CE-1003](#) [CE-1004](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#)
[XGS-1205](#) [06322](#) [SPB05B-15](#) [L-DA20](#) [DCG40-5G](#) [XKS-2405](#) [DPA423R](#) [vi-m13-cw-03](#) [VI-L53-CV](#) [24IBX15-50-0ZG](#) [HZZ01204-G](#)
[SPU02L-09](#) [SPU02M-09](#) [SPU02N-09](#) [QUINT4-BUFFER/24DC/40](#) [QUINT4-CAP/24DC/5/4KJ](#) [73-551-5039I](#) [DFC15U48D15G](#) [SEN-6471-](#)
[1EM](#) [AHV2815DF/HBB](#) [MI-LC21-IX](#) [PAH-48/8.5-D48NB1-C](#) [BM3020-7A](#) [QRS2050P025K00](#) [CM2320-9EG](#) [SKMW15F-05](#)
[V300A28H400BF3](#) [TEN 15-1223](#) [TEQ 100-2418WIR](#) [TEQ 160-7218WIR](#) [R05C05TE05S-R](#) [HQA2W085W033V-N07-S](#) [AM1SS-2405SJZ](#)
[AM2DS-1224SJZ](#) [AM2DS-2405DJZ](#) [AM10SBO-4824SNZ-B](#) [AM15E-2405S-NZ](#) [AM2DS-1212SJZ](#) [AM30SBO-4805SNZ-B](#)
[LT8301ES5#WTRPBF](#)