


Features

- ◆ DIP-24 plastic package
- ◆ I/O isolation voltage 2500 VACrms
- ◆ Supplementary insulation rated for working voltage up to 250 VAC
- ◆ Regulated output
- ◆ Operating temp. range -40°C to +85°C
- ◆ Low coupling capacity
- ◆ Short circuit protection
- ◆ 3-years product warranty

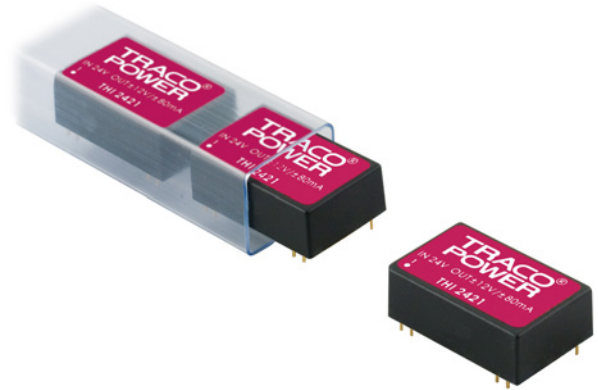

The THI 2 series is a family of dc/dc converter with very high I/O isolation specification. They offer a cost effective solution for all industrial, telecom and medical applications where a supplementary insulation is required. SMD technology and a 100 % production test of the safety barrier ensure a very high reliability of this product.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THI 0511	5.0 VDC ± 10%	5 VDC	400 mA	62 %
THI 0512		12 VDC	165 mA	63 %
THI 0513		15 VDC	130 mA	64 %
THI 0520		±5 VDC	±100 mA	42 %
THI 0521		±12 VDC	±80 mA	57 %
THI 0522		±15 VDC	±65 mA	57 %
THI 1211	12.0 VDC ± 10%	5 VDC	400 mA	62 %
THI 1212		12 VDC	165 mA	63 %
THI 1213		15 VDC	130 mA	64 %
THI 1220		±5 VDC	±100 mA	45 %
THI 1221		±12 VDC	±80 mA	59 %
THI 1222		±15 VDC	±65 mA	59 %
THI 2411	24 VDC ± 10%	5 VDC	400 mA	62 %
THI 2412		12 VDC	165 mA	63 %
THI 2413		15 VDC	130 mA	64 %
THI 2420		±5 VDC	±100 mA	45 %
THI 2421		±12 VDC	±80 mA	58 %
THI 2422		±15 VDC	±65 mA	58 %

Input Specifications

Input current no load / full load	5 Vin models: 100 mA / 660 mA typ. 12 Vin models: 50 mA / 280 mA typ. 24 Vin models: 30 mA / 140 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 7.5 V max. 12 Vin models: 15 V max. 24 Vin models: 30 V max.
Input filter	Pi-Filter

Output Specifications

Voltage set accuracy	±3 %
Voltage balance (dual output models)	3 % max.
Regulation	– Input variation 0.5 % – Load variation 10–100% 1.0 % max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max.
Temperature coefficient	±0.02 %/K
Current limitation	>120 % constant current
Short circuit protection	continuous (automatic recovery)
Capacitive load	single output models: 680 µF max. dual output models: 270 µF max. (each output)

General Specifications


Temperature ranges	– Operating –40°C to +85°C – Case +95°C max. – Storage –40°C to +125°C
Derating	3 %/K above 70°C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)	>600'000 h
Isolation voltage	– I/O Isolation voltage 2'500 VACrms (rated for 250VAC) – Isolation test voltage (1 sec.) 6'000 Vpk
Isolation capacitance	– Input/Output 20 pF typ.
Isolation resistance	– Input/Output >10 Gohm
Switching frequency	25 – 80 kHz (PFM)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

Casing material	plastic (UL 94V-0 rated)
Weight	12.4 g (0.44 oz)
Soldering temperature	max. 265°C / 10 sec

Outline Dimensions

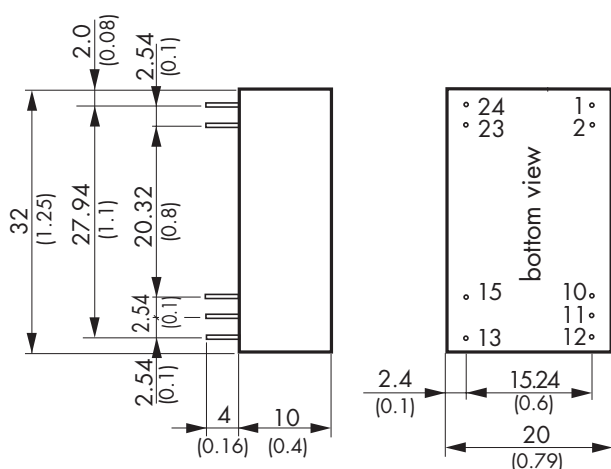

Pin-Out		
Pin	Single	Dual
1	+Vin (VCC)	+Vin (VCC)
2	+Vin (VCC)	+Vin (VCC)
10	No pin	Common
11	No pin	Common
12	-Vout	No pin.
13	+Vout	-Vout
15	No pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

Dimensions in [mm], () = Inch
 Pin diameter: 0.5 ±0.05 (0.024 ±0.002)
 Tolerances: ±0.25 (±0.01)
 Pin pitch tolerances: ±0.05 (±0.002)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)