


Features

- ◆ Ultracompact DIP 16 package
- ◆ I/O isolation 3000 VACrms rated for 300 Vrms working voltage
- ◆ Medical safety to UL 60601-1 and IEC/EN 60601-1 3rd edition, 2 x MOOP
- ◆ Industrial safety to IEC/EN/UL 60950-1
- ◆ Operating temp. range -40°C to $+71^{\circ}\text{C}$
- ◆ 3-years product warranty

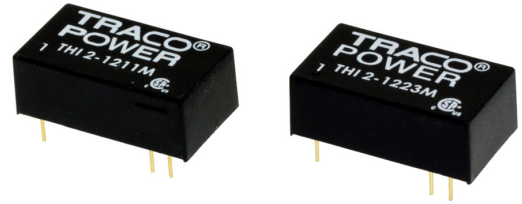

The THI 2M series is a new range of ultra-compact 2W DC/DC-converters providing a high I/O-isolation voltage of 3000 VAC. With a reinforced I/O-isolation system this product is an economical solution for many applications in instrumentation, industrial controls, medical equipment and everywhere where supplementary- or reinforced insulation is required to meet requested safety standards. Full SMD-design with exclusive use of ceramic capacitors ensure a very high reliability and a long product lifetime.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THI 2-0511M	5.0 VDC \pm 10% (nominal 5 VDC)	5 VDC	400 mA	66 %
THI 2-0512M		12 VDC	165 mA	66 %
THI 2-0513M		15 VDC	133 mA	66 %
THI 2-0522M		\pm 12 VDC	\pm 83 mA	72 %
THI 2-0523M		\pm 15 VDC	\pm 66 mA	73 %
THI 2-1211M	12.0 VDC \pm 10% (nominal 12 VDC)	5 VDC	400 mA	66 %
THI 2-1212M		12 VDC	165 mA	66 %
THI 2-1213M		15 VDC	133 mA	66 %
THI 2-1222M		\pm 12 VDC	\pm 83 mA	74 %
THI 2-1223M		\pm 15 VDC	\pm 66 mA	75 %
THI 2-2411M	24 VDC \pm 10% (nominal 24 VDC)	5 VDC	400 mA	66 %
THI 2-2412M		12 VDC	165 mA	66 %
THI 2-2413M		15 VDC	133 mA	66 %
THI 2-2422M		\pm 12 VDC	\pm 83 mA	74 %
THI 2-2423M		\pm 15 VDC	\pm 66 mA	75 %

Input Specifications

Input current no load	5 Vin models: 60 mA 12 Vin models: 30 mA 24 Vin models: 15 mA
Recommended external input fuse (slow blow)	5 Vin models: 1.0 A 12 Vin models: 0.5 A 24 Vin models: 0.2 A
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Input filter	internal capacitors

Output Specifications

Voltage set accuracy	±4 %
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation 1.2 % / 1.5 % change of Vin – Load variation 20 – 100 % 10 % max. 12 % max. for 5 Vout models.
Ripple and noise (0–20 MHz Bandwidth)	150 mVpk-pk max
Temperature coefficient	±0.02 %/K
Short circuit protection	0.5 sec. max. (automatic recovery)
Minimum load	2 % of rated max. current
Capacitive load	single output models: 330 µF max. dual output models: 100 µF max. (each output)

General Specifications

Temperature ranges	– Operating –40°C to +71°C – Storage –50°C to +125°C – Case temperature +90°C max.
Thermal impedance	22.5 K/W
Derating	2.5 %/K above 60°C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)	>2.0 Mio h
Isolation voltage – Input/Output (50Hz, 60sec)	Reinforced, rated for 300 Vrms working voltage 3000 VAC, 2 x MOOP IT applications in accordance to IEC/EN 60950-1: 4000 VAC
Isolation test voltage (1 sec.)	6'000 Vpk
Leakage current (at 240VAC, 60Hz)	2 µA max.
Isolation capacitance – Input/Output	20 pF max. (at 100KHz, 1V)
Isolation resistance – Input/Output	>10 Gohm (at 500VDC)
Switching frequency	50 – 100 kHz (PFM)
Safety standards	IEC/EN 60950-1, UL 60950-1 CSA C22.2 No. 60950-1-03 IEC/EN 60601-1 3rd edition, 2 x MOOP, UL 60601-1, CSA C22.2 No. 601.1
Safety approvals	– CSA certificate for medical electrical equipment www.tracopower.com/products/thi2m-csa60601.pdf for information technology equipment www.tracopower.com/products/thi2m-csa60950.pdf – CB test certificate for medical electrical equipment www.tracopower.com/products/thi2m-cb60601.pdf for information technology equipment www.tracopower.com/products/thi2m-cb60950.pdf

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Casing material	non conductive plastic (UL 94V-0 rated)
Pin material	copper alloy with gold plated nickel subplate
Weight	5.1 g (0.18oz)
Altitude during operation	up to 5'000 m approved

Application note: www.tracopower.com/products/thi2m-application.pdf



- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

Outline Dimensions

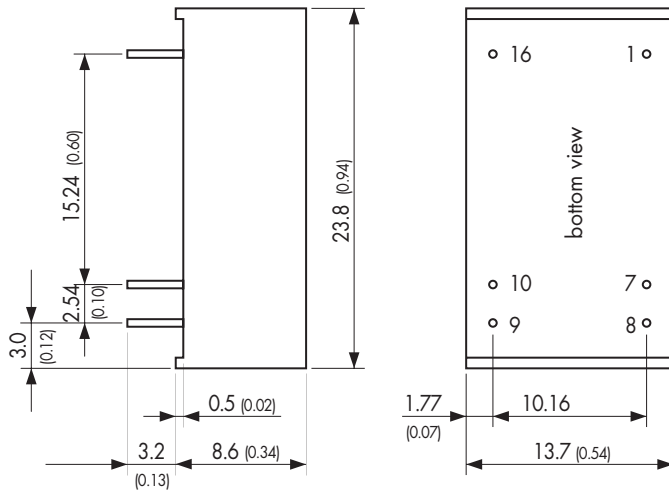

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Dimensions in [mm], () = Inch
 Pin diameter: 0.5 ±0.05 (0.024 ±0.002)
 Tolerances: ±0.25 (±0.01)
 Pin pitch tolerances: ±0.05 (±0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [CE-1003](#) [CE-1004](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#)
[XGS-1205](#) [06322](#) [SPB05B-15](#) [L-DA20](#) [DCG40-5G](#) [XKS-2405](#) [DPA423R](#) [vi-m13-cw-03](#) [VI-L53-CV](#) [24IBX15-50-0ZG](#) [HZZ01204-G](#)
[SPU02L-09](#) [SPU02M-09](#) [SPU02N-09](#) [QUINT4-BUFFER/24DC/40](#) [QUINT4-CAP/24DC/5/4KJ](#) [73-551-5039I](#) [DFC15U48D15G](#) [SEN-6471-](#)
[1EM](#) [AHV2815DF/HBB](#) [MI-LC21-IX](#) [PAH-48/8.5-D48NB1-C](#) [BM3020-7A](#) [QRS2050P025K00](#) [CM2320-9EG](#) [SKMW15F-05](#)
[V300A28H400BF3](#) [TEN 15-1223](#) [TEQ 100-2418WIR](#) [TEQ 160-7218WIR](#) [R05C05TE05S-R](#) [HQA2W085W033V-N07-S](#) [AM1SS-2405SJZ](#)
[AM2DS-1224SJZ](#) [AM2DS-2405DJZ](#) [AM10SBO-4824SNZ-B](#) [AM15E-2405S-NZ](#) [AM2DS-1212SJZ](#) [AM30SBO-4805SNZ-B](#)
[LT8301ES5#WTRPBF](#)