


- Reinforced I/O-isolation 3000 VAC
- Shock and vibration resistance according to EN 61373
- Wide 4:1 input voltage range: 9-36, 18-75, 40-160 VDC
- Operating temperature range -40 to +92°C
- Internal EN 55032 class A filter
- High efficiency up to 85%
- Protection against overload, overvoltage and short circuit
- 3-year product warranty



The THR 3WI is 3 Watt DC/DC converters series with reinforced isolation (3000 VAC). These regulated DC/DC converters come in either a DIP-24 package and also feature increased resistance against shock and vibration according to EN 61373. The THR 3WI offers an internal input filter to comply with EN 55032 class A. High efficiencies up to 85% allow safe operation from -40°C to +92°C (with derating). All models have a wide 4:1 input voltage range and precisely regulated, isolated output voltages. With the latest IT safety certifications (IEC/EN/UL 62368-1) the THR 3WI series is the perfect choice for many demanding applications in the industrial, transportation and instrumentation sectors.

### Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
THR 3-2411WI THR 3-2412WI THR 3-2413WI THR 3-2422WI THR 3-2423WI	9 - 36 VDC (24 VDC nom.)	5 VDC 12 VDC 15 VDC +12 VDC +15 VDC	600 mA 250 mA 200 mA 125 mA 100 mA			80 % 84 % 85 % 83 % 84 %
THR 3-4811WI THR 3-4812WI THR 3-4813WI THR 3-4822WI THR 3-4823WI	18 - 75 VDC (48 VDC nom.)	5 VDC 12 VDC 15 VDC +12 VDC +15 VDC	600 mA 250 mA 200 mA 125 mA 100 mA			80 % 83 % 84 % 83 % 83 %
THR 3-7211WI THR 3-7212WI THR 3-7213WI THR 3-7222WI THR 3-7223WI	40 - 160 VDC (110 VDC nom.)	5 VDC 12 VDC 15 VDC +12 VDC +15 VDC	600 mA 250 mA 200 mA 125 mA 100 mA			80 % 84 % 84 % 83 % 85 %

## Input Specifications

Input Current	- At no load	24 Vin models: <b>9 mA typ.</b> 48 Vin models: <b>5 mA typ.</b> 110 Vin models: <b>3 mA typ.</b>
	- At full load	24 Vin models: <b>150 mA typ.</b> 48 Vin models: <b>75 mA typ.</b> 110 Vin models: <b>33 mA typ.</b>
Surge Voltage		24 Vin models: <b>50 VDC max.</b> (1 s max.) 48 Vin models: <b>100 VDC max.</b> (1 s max.) 110 Vin models: <b>170 VDC max.</b> (1 s max.)
Under Voltage Lockout		24 Vin models: <b>7.5 VDC typ.</b> 48 Vin models: <b>16 VDC typ.</b> 110 Vin models: <b>37 VDC typ.</b>
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

## Output Specifications

Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.5% max.</b> dual output models: <b>0.5% max.</b>
	- Load Variation (0 - 100%)	single output models: <b>1% max.</b> dual output models: <b>1% max.</b> (Output 1) <b>1% max.</b> (Output 2)
	- Voltage Balance (symmetrical load)	dual output models: <b>2% max.</b>
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>5% max.</b>
Ripple and Noise (20 MHz Bandwidth)	- single output	5 Vout models: <b>50 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 12 Vout models: <b>75 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 15 Vout models: <b>75 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC)
	- dual output	12 / -12 Vout models: <b>75 / 75 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC) 15 / -15 Vout models: <b>75 / 75 mVp-p typ.</b> (w/ 10 µF, 25 V MLCC)
Capacitive Load	- single output	5 Vout models: <b>680 µF max.</b> 12 Vout models: <b>330 µF max.</b> 15 Vout models: <b>220 µF max.</b>
	- dual output	12 / -12 Vout models: <b>220 / 220 µF max.</b> 15 / -15 Vout models: <b>220 / 220 µF max.</b>
Minimum Load		Not required
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>60 ms max.</b>
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		<b>150% typ. of Iout max.</b>
Transient Response	- Response Deviation	<b>3% typ. / 5% max.</b> (75% to 100% Load Step)
	- Response Time	<b>500 µs max.</b> (75% to 100% Load Step)

## Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/thr3wi">www.tracopower.com/overview/thr3wi</a>

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55011 class A (internal filter) EN 55032 class A (internal filter) FCC Part 15 class A (internal filter)
	- Radiated Emissions	EN 55011 class A (internal filter) EN 55032 class A (internal filter) FCC Part 15 class A (internal filter)
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 24 Vin models: 470 $\mu$ F chemi-con KY 48 Vin models: 330 $\mu$ F chemi-con KY 110 Vin models: 220 $\mu$ F chemi-con KY EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

## General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +92°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-50°C to +125°C
Power Derating	- High Temperature	4 %/K above 80°C
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		170 kHz typ. (PWM) (110 Vin models)
		285 kHz typ. (PWM) (other models)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M $\Omega$ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'500 pF typ.
Reliability	- Calculated MTBF	3'360'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	EN 61373
	- Mechanical Shock	EN 61373
Housing Material		Non-conductive Plastic (UL94 V-0 rated)
Pin Material		Copper Alloy (C6801)
Pin Foundation Plating		Nickel (2 - 4 $\mu$ m)
Pin Surface Plating		Tin (3 - 5 $\mu$ m), matte
Soldering Profile		260°C / 10 s max.
Connection Type		THD (Through-Hole Device)
Weight		15.4 g
Environmental Compliance	- REACH Declaration	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	<a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 7a (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

**Supporting Documents**

Overview Link (for additional Documents)

[www.tracopower.com/overview/thr3wi](http://www.tracopower.com/overview/thr3wi)

**Outline Dimensions**

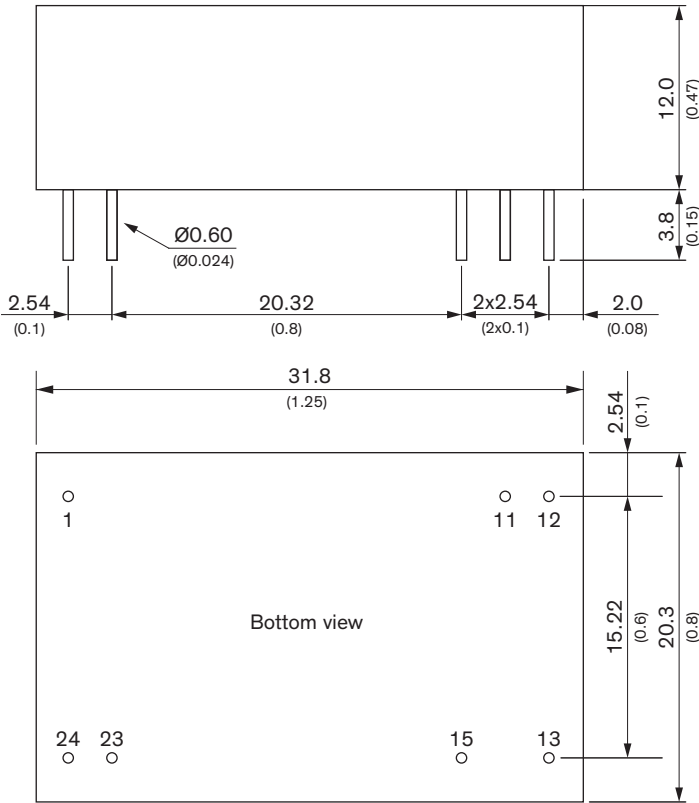

Dimensions in mm (inch)  
 Tolerances: x.x  $\pm 0.5$  ( $\pm 0.02$ )  
 x.xx  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin diameter  $\pm 0.05$  ( $\pm 0.002$ )

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [TRACO Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [18362](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#)  
[CE-1003](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-](#)  
[1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#)  
[XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-](#)  
[7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#) [CK2540-9ERT](#) [AK-1615-7R](#)