

- Reinforced I/O-isolation 3000 VAC
- Shock and vibration resistance according to EN 61373
- Wide 4:1 input voltage range: 36-160 VDC
- Operating temperature range -40 to +80°C
- High efficiency up to 90%
- Protection against overload, overvoltage and short circuit
- 3-year product warranty



The THR 40WI is 40 Watt DC/DC converters series with reinforced isolation (3000 VAC). These regulated DC/DC converters come in either a 2"x1" package and also feature increased resistance against shock and vibration according to EN 61373. High efficiencies up to 90% allow safe operation from -40°C to +70°C (with derating). All models have a wide 4:1 input voltage range and precisely regulated, isolated output voltages. With the latest IT safety certifications (IEC/EN/UL 62368-1) the THR 40WI series is the perfect choice for many demanding applications in the industrial, transportation and instrumentation sectors.

### Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
THR 40-7211WI	36 - 160 VDC (110 VDC nom.)	5 VDC	8'000 mA			88 %
THR 40-7212WI		12 VDC	3'330 mA			89 %
THR 40-7213WI		15 VDC	2'670 mA			89 %
THR 40-7215WI		24 VDC	1'670 mA			89 %
THR 40-72154WI		54 VDC	741 mA			90 %
THR 40-7222WI		+12 VDC	1'670 mA	-12 VDC	1'670 mA	89 %
THR 40-7223WI		+15 VDC	1'330 mA	-15 VDC	1'330 mA	89 %

### Options

<b>on demand</b> (backorder with MOQ non stocking item)	- Optional models with heatsink
--	---------------------------------

## Input Specifications

Input Current	- At no load - At full load	40 mA typ. 409 mA typ.
Surge Voltage		170 VDC max. (100 ms max.)
Under Voltage Lockout		30 VDC min. / 33 VDC typ. / 35.5 VDC max.
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

## Output Specifications

Output Voltage Adjustment		-15% to +5% (54 Vout model) ±10% (other single output models) (By external trim resistor) See application note: <a href="http://www.tracopower.com/overview/thr40wi">www.tracopower.com/overview/thr40wi</a> Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) - Voltage Balance (symmetrical load)	single output models: 0.2% max. dual output models: 0.2% max. single output models: 0.5% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) dual output models: 2% max.
Ripple and Noise (20 MHz Bandwidth)	- single output - dual output - single output - dual output	5 Vout models: 75 mVp-p typ. (w/ 1 µF, 100 V MLCC) 12 Vout models: 125 mVp-p typ. (w/ 1 µF, 100 V MLCC) 15 Vout models: 125 mVp-p typ. (w/ 1 µF, 100 V MLCC) 24 Vout models: 150 mVp-p typ. (w/ 1 µF, 100 V MLCC) 54 Vout models: 250 mVp-p typ. (w/ 1 µF, 100 V MLCC) 12 / -12 Vout models: 125 / 125 mVp-p typ. (w/ 1 µF, 100 V MLCC) 15 / -15 Vout models: 125 / 125 mVp-p typ. (w/ 1 µF, 100 V MLCC) 5 Vout models: 85 mVp-p max. (w/ 1 µF, 100 V MLCC) 12 Vout models: 140 mVp-p max. (w/ 1 µF, 100 V MLCC) 15 Vout models: 140 mVp-p max. (w/ 1 µF, 100 V MLCC) 24 Vout models: 170 mVp-p max. (w/ 1 µF, 100 V MLCC) 54 Vout models: 280 mVp-p max. (w/ 1 µF, 100 V MLCC) 12 / -12 Vout models: 140 / 140 mVp-p max. (w/ 1 µF, 100 V MLCC) 15 / -15 Vout models: 140 / 140 mVp-p max. (w/ 1 µF, 100 V MLCC)
Capacitive Load	- single output - dual output	5 Vout models: 13'600 µF max. 12 Vout models: 2'400 µF max. 15 Vout models: 1'500 µF max. 24 Vout models: 600 µF max. 54 Vout models: 130 µF max. 12 / -12 Vout models: 1'200 / 1'200 µF max. 15 / -15 Vout models: 750 / 750 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		30 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		110 - 185% of Iout max. 150% typ. of Iout max.
Overvoltage Protection		125% typ. of Vout nom.
Transient Response	- Response Deviation - Response Time	3% typ. / 5% max. (75% to 100% Load Step) 250 µs typ. (75% to 100% Load Step)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

### Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/thr40wi">www.tracopower.com/overview/thr40wi</a>

### EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter) FCC Part 15 class A (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) FCC Part 15 class A (with external filter)
	External filter proposal:	<a href="http://www.tracopower.com/overview/thr40wi">www.tracopower.com/overview/thr40wi</a>
EMS Immunity	- Electrostatic Discharge	EN 55035 (Multimedia) Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: tbd. EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +70°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-50°C to +125°C
Power Derating	- High Temperature	See application note: <a href="http://www.tracopower.com/overview/thr40wi">www.tracopower.com/overview/thr40wi</a>
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote	On: 3.5 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	2.5 mA typ.
	- Remote Pin Input Current	-0.5 to 0.5 mA
Altitude During Operation		4'000 m max.
Switching Frequency		220 - 310 kHz (PWM)
		265 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case, 60 s	1'500 VAC
	- Output to Case, 60 s	1'500 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M $\Omega$ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'500 pF typ.
Reliability	- Calculated MTBF	900'000 h (MIL-HDBK-21 7F, ground benign)
Environment	- Vibration	EN 61373
	- Mechanical Shock	EN 61373
Housing Material		Red Copper, Powder Coating
Base Material		Non-conductive FR4 (UL94 V-0 rated)
Isolation Frame Material		Non-conductive black Plastic (UL94 V-0 rated)
Potting Material		Epoxy (UL 94 V-0 rated)
Pin Material		Copper Alloy (C6801)
Pin Foundation Plating		Nickel (2 - 4 $\mu$ m)
Pin Surface Plating		Tin (3 - 5 $\mu$ m), matte

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Soldering Profile	260°C / 10 s max.
Connection Type	THD (Through-Hole Device)
Weight	51.5 g
Environmental Compliance	- REACH Declaration <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> <b>Exemptions: 7a</b> (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/thr40wi](http://www.tracopower.com/overview/thr40wi)

### Outline Dimensions

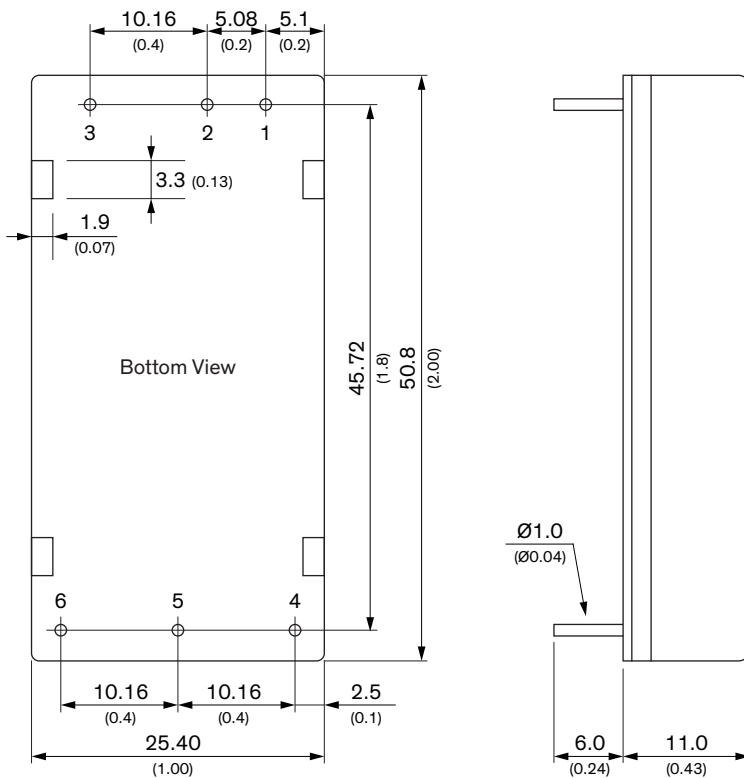

Dimensions in mm (inch)  
Tolerances: x.x ±0.75 (±0.03)  
x.xx ±0.25 (±0.01)  
Pin diameter ±0.05 (±0.002)

### Pinout

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [TRACO Power](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [18362](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#)  
[CE-1003](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-](#)  
[1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#)  
[XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-](#)  
[7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#) [CK2540-9ERT](#) [AK-1615-7R](#)