


Features

- ◆ I/O isolation voltage 3000 VACrms
- ◆ Reinforced insulation, rated for 300 VAC working voltage
- ◆ Unregulated device
- ◆ Certified to IEC/EN/UL 60950-1 safety standards
- ◆ Safety barrier 100 % production test
- ◆ Low coupling capacity
- ◆ Single-in-line package (SIP)
- ◆ Lead-free design, RoHS compliant
- ◆ 3-year product warranty



UL 60950-1



The TMV-EN series is a range of 1 Watt non-regulated DC/DC converters with high I/O-isolation. This product features an isolation barrier which is approved for supplementary an reinforced insulation. SMD construction and a special designed toroidal transformer made it possible to built these converters in a standard SIP package with a very small footprint. These features making the TMV-EN series an economical solution in many DC/DC converter applications requiring safety agency approval.

Models

Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505 EN	5 VDC \pm 10 %	5 VDC	200 mA	66 %
TMV 0512 EN		12 VDC	80 mA	66 %
TMV 0515 EN		15 VDC	65 mA	66 %
TMV 0505D EN		\pm 5 VDC	\pm 100 mA	66 %
TMV 0512D EN		\pm 12 VDC	\pm 40 mA	72 %
TMV 0515D EN		\pm 15 VDC	\pm 35 mA	73 %
TMV 1205 EN	12 VDC \pm 10 %	5 VDC	200 mA	66 %
TMV 1212 EN		12 VDC	80 mA	66 %
TMV 1215 EN		15 VDC	65 mA	66 %
TMV 1205D EN		\pm 5 VDC	\pm 100 mA	66 %
TMV 1212D EN		\pm 12 VDC	\pm 40 mA	74 %
TMV 1215D EN		\pm 15 VDC	\pm 35 mA	75 %

Input Specifications

Input current no load / full load	5 Vin models: 55 mA / 285 mA typ. 12 Vin models: 30 mA / 115 mA typ.
Surge voltage (1 s max.)	5 Vin models: 9 V max. 12 Vin models: 29 V max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	internal capacitor
Input fuse – recommended fuse rating	recommended, required for compliance with CB 5 V models: 500 mA 12 V models: 200 mA

Output Specifications

Voltage set accuracy	±1 % typ. / ±3 % max.
Voltage balance (dual output models, balanced loads)	±0.1 % typ. / ±1 % max.
Regulation – Input variation (1 % change of Vin) – Load variation (20 – 100 %)	1.2 % typ. / 1.5 % max. <10 %
Ripple and noise (20 MHz Bandwidth)	100 mVp-p typ. / 150 mVp-p max.
Temperature coefficient	±0.01 %/K typ. / ±0.02 %/K max.
Short circuit protection	limited 0.5 s max.
Capacitive load	single output models: 680 µF max. dual output models: 220 µF max. (each output)

Isolation / Safety

Isolation voltage – Isolation test voltage (tested for 1 s) – I/O isolation voltage (60 s) – Rated max. working voltage	6'000 Vpk 3'000 VAC 300 VAC / 640 Vpk
Isolation capacitance (input/output)	15 pF typ. / 20 pF max.
Isolation resistance (input/output)	>10 GOhm
Safety standards – Certification documents	IEC 60950-1:2005 +A1:2009 EN 60950-1:2006 +A1:2010 +A11:2009 +A12:2011 UL 60950-1, CSA C22.2 No. 60950-1-03 www.tracopower.com/overview/tmv-en

General Specifications

Temperature ranges – Operating – Max. ambient approved IEC/UL 60950-1 – Case temperature – Storage temperature	–25°C to +85°C +70°C +105 °C max. –50°C to +125°C
Derating	2.85 %/K above 70°C
Humidity (non condensing)	95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	>2'000'000 h
Switching frequency	50 to 100 kHz (frequency modulation)
Altitude during operation	5'000m max. approved
Environmental compliance – Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive plastic (UL 94V-0 rated)
Package weight	3.9 g (0.14 oz)
Soldering temperature	max. 260°C / 10 s

Supporting documents: www.tracopower.com/overview/tmv-en

Outline Dimensions

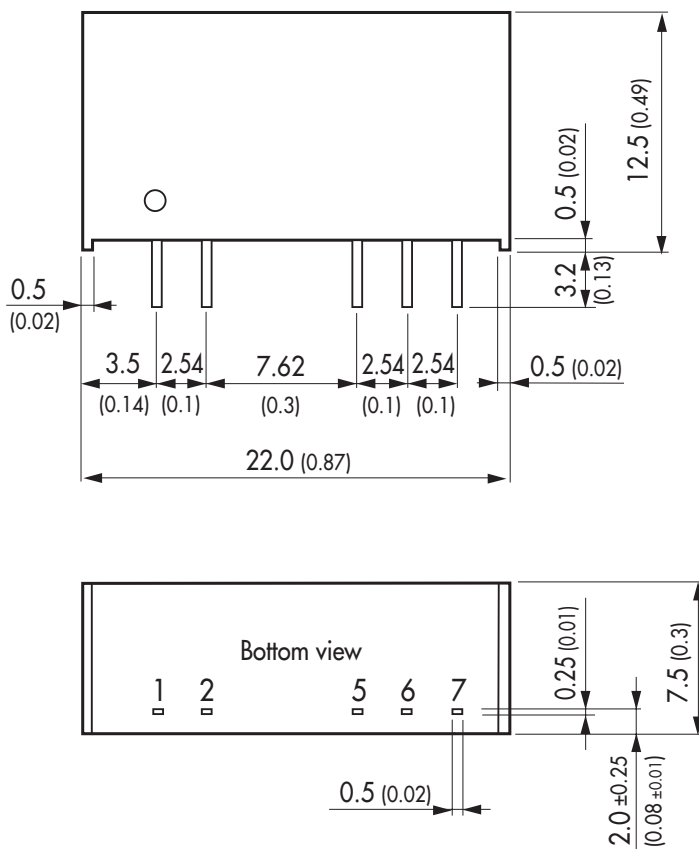

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Dimensions in [mm], () = Inch
Tolerance ± 0.5 (0.02)
Pin pitch tolerance ± 0.13 (0.005)
Pin width tolerance ± 0.05 (0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)