


- Fully encapsulated, dust resistant and waterproof (IP68 certified)
- Operating temperature range  $-20^{\circ}$  to  $+80^{\circ}\text{C}$
- Mountable in wall outlet boxes, with flying leads
- Screw mountable on wood and inside furniture
- Safety approval IEC/EN 62368-1 and IEC/EN 60335-1
- 2xMOPP certified according to IEC/EN 60601-1 3rd edition
- Leakage current  $< 100 \mu\text{A}$  for body-floating (BF) applications
- I/O isolation 4000 VAC (reinforced)
- Short-circuit protection (SCP), overvoltage protection (OVP) and overtemperature protection (OTP)
- 5-year product warranty

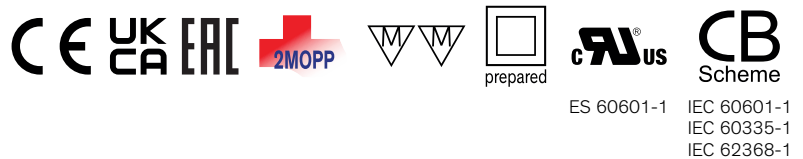

The TMW 36 is a series of fully encapsulated AC/DC power supplies designed for medical, household, and industrial applications. All models come in compact, dust resistant, and waterproof IP68 housings, are IEC/EN 62368-1, IEC/EN 60335-1 and IEC/EN 60601-1 3rd edition compliant and are certified for 2xMOPP. Featuring a reinforced isolation, the TMW 36 power supplies are prepared for protection class II applications. Their wide operating temperature range from  $-20^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$  makes them ideal candidates for demanding applications.

### Models

Order Code	Output Power max.	Output Voltage nom.	Output Current max.	Efficiency typ.
TMW 36-112	36 W	12 VDC	3 A	87 %
TMW 36-124		24 VDC	1.5 A	87 %

### Input Specifications

Input Voltage		Operational Range: <b>85 - 264 VAC</b> (Full Range) Rated Range: <b>100 - 240 VAC</b> (Full Range)
Input Frequency		Operational Range: <b>47 - 63 Hz</b> Certified: <b>50/60 Hz</b>
Power Consumption	- No load & Vin = 230 VAC - No load & Vin = 115 VAC	<b>200 mW max.</b> (Ready to meet ErP directive) <b>200 mW max.</b>
Input Inrush Current	- At 230 VAC - At 115 VAC	<b>50 A max.</b> <b>25 A max.</b>
Power Factor	- At 230 VAC - At 115 VAC	<b>0.45 min.</b> <b>0.55 min.</b>
Input Protection		<b>T 2 A</b> (Internal Fuse)
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)

### Output Specifications

Voltage Set Accuracy		<b>±2% max.</b>
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (10 - 90%)	<b>0.5% max.</b> <b>1% max.</b>
Ripple and Noise (20 MHz Bandwidth)		<b>140 mVp-p max.</b>
Capacitive Load		<b>10'000 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±2 %/K max.</b>
Hold-up Time	- At 230 VAC - At 115 VAC	<b>40 ms min.</b> <b>7 ms min.</b>
Start-up Time	- At 230 VAC - At 115 VAC	<b>500 ms max.</b> <b>500 ms max.</b>
Start-up Overshoot Voltage		<b>5% max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>
Output Current Limitation		<b>105 - 150% of Iout max.</b>
Overvoltage Protection		<b>130% typ. of Vout nom.</b> <b>120 - 160% of Vout nom.</b>
Transient Response	- Response Deviation - Response Time	<b>5% max.</b> (10% to 90% Load Step) <b>2'000 µs max.</b> (10% to 90% Load Step)

### Safety Specifications

Safety Standards	- IT / Multimedia Equipment  - Household  - Medical Equipment  - LED Modules Controlgear - Luminaires for Furniture - Power Transformers  - Certification Documents	EN 62368-1 IEC 62368-1 EN 60335-1 IEC 60335-1 EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 CSA-C22.2, No 60601-1 2 x MOPP (Means Of Patient Protection) EN 61347-2-13 VDE 0710-14 EN 61558-1 IEC 61558-1 EN 61558-2-8 IEC 61558-2-8 EN 61558-2-16 IEC 61558-2-16  <a href="http://www.tracopower.com/overview/tmw36">www.tracopower.com/overview/tmw36</a>
------------------	---	---

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Protection Class	Class I & II (Prepared): Reinforced Insulation
Pollution Degree	PD 2
Over Voltage Category	OVC II

### EMC Specifications

EMI Emissions	EN 61000-6-3 (Generic Residential) EN 61204-3 (Low Voltage Power Supplies)
- Conducted Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter)
- Radiated Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter)
- Harmonic Current Emissions	EN 61000-3-2, class A
EMS Immunity	EN 61000-6-2 (Generic Industrial) EN 60601-1-2 edition 4 (Medical Devices)
- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A
	L to L: EN 61000-4-5, ±1 kV, perf. criteria A
- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
- PF Magnetic Field	Continuous: EN 61000-4-8, 30 A/m, perf. criteria A
- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11 20%, 250 periods, perf. criteria A 30%, 25 periods, perf. criteria A 60%, 10 periods, perf. criteria A >95%, 5 periods, perf. criteria B >95%, 250 periods, perf. criteria B
	115 VAC / 60 Hz: EN 61000-4-11 20%, 250 periods, perf. criteria A 30%, 25 periods, perf. criteria B 60%, 10 periods, perf. criteria B >95%, 5 periods, perf. criteria B >95%, 250 periods, perf. criteria B

### General Specifications

Relative Humidity	100% max.
Temperature Ranges	- Operating Temperature: -20°C to +80°C - Storage Temperature: -40°C to +90°C
Power Derating	- High Temperature: 2 %/K above 50°C (at Vin ≥ 187 VAC) 2 %/K above 40°C (at Vin < 187 VAC) - Low Input Voltage: 2 %/V below 100 VAC
Over Temperature Protection Switch Off	- Protection Mode: 85°C min. / 90°C typ. / 95°C max. (Automatic recovery) - Measurement Point: Case
Cooling System	Natural convection (20 LFM)
Altitude During Operation	5'000 m max. (4'000 m max. for IEC 61558-2-8)
Switching Frequency	25 - 140 kHz (PWM QR)
Insulation System	Reinforced Insulation
Isolation Test Voltage	- Input to Output, 60 s: 4'000 VAC - Input to Output, 1 s: 4'000 VAC
Creepage	- Input to Output: 8 mm min.
Clearance	- Input to Output: 8 mm min.
Isolation Resistance	- Input to Output, 500 VDC: 100 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V: 1'100 pF typ. / 1'300 pF max.
Leakage Current (at 240 VAC / 60 Hz)	- Touch Current: 100 µA max.
Reliability	- Calculated MTBF: 3'400'000 h (see application note) (IEC 61709)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environment	- Vibration - Mechanical Shock	IEC 60068-2-6 3 g, 3 axis, sine sweep, 10-55 Hz, 1 oct/min IEC 60068-2-27 25 g, 3 axis, half sine, 11 ms
Case Ingress Protection		IP 68 (acc. IEC 60529)
Housing Material		Plastic (UL 94 V-1 rated)
Potting Material		Polyurethane (UL 94 V-2 rated)
Housing Type		Plastic Case
Mounting Type		Chassis Mount
Connection Type		Flying Leads
Weight	- single output	12 VDC model: 139 g 24 VDC model: 166 g
Power Back Immunity		12 VDC model: 15 V max. 24 VDC model: 30 V max.
Environmental Compliance	- REACH Declaration  - RoHS Declaration	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 6a, 6c, 7a, 7c-I, 7c-II (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)


## Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tmw36](http://www.tracopower.com/overview/tmw36)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

**Outline Dimensions**

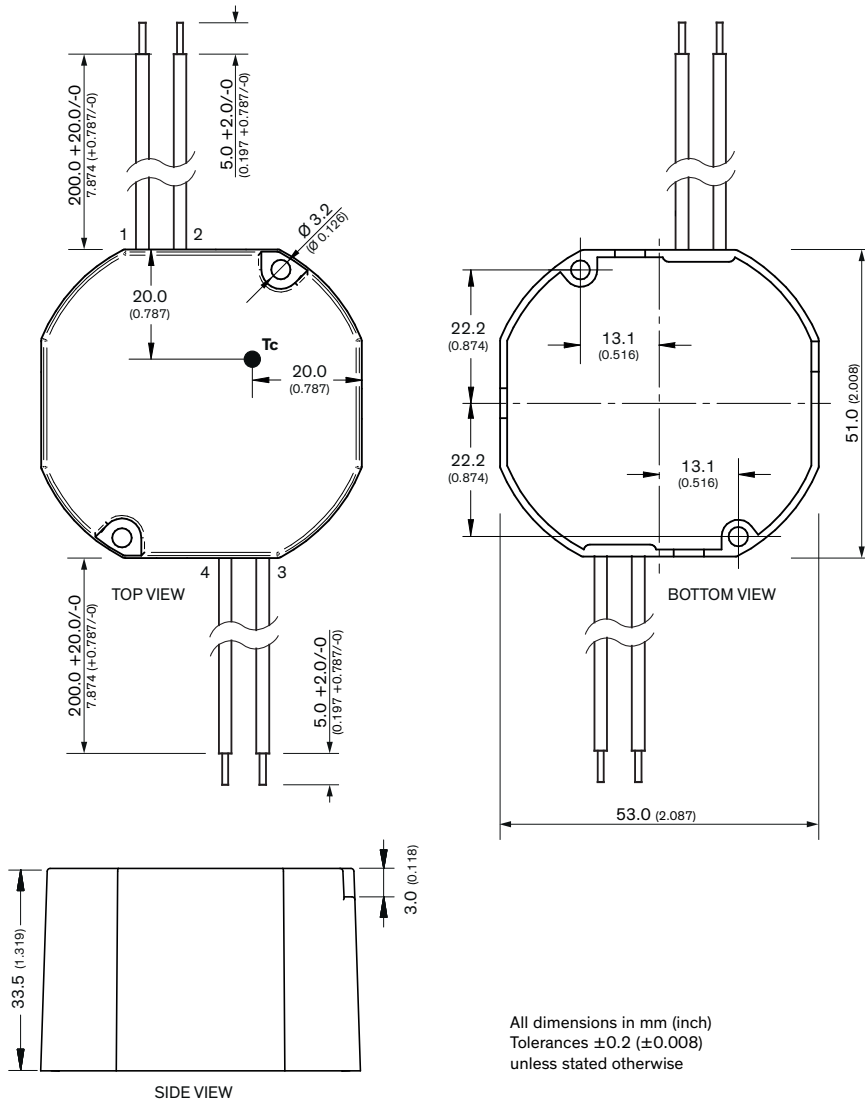

Connection Details			
Wire	Function	Color	Type
1	AC (N)	Blue	20AWG / 0.52mm <sup>2</sup>
2	AC (L)	Brown	20AWG / 0.52mm <sup>2</sup>
3	- Vout	Black	20AWG / 0.52mm <sup>2</sup>
4	+ Vout	Red	20AWG / 0.52mm <sup>2</sup>

All dimensions in mm (inch)  
Tolerances  $\pm 0.2$  ( $\pm 0.008$ )  
unless stated otherwise

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [TRACO Power](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [EVS57-5R3/A](#) [FAS-002](#) [AAD600S-4-OP](#) [MS924](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [LDIN100150](#) [FAP-001](#) [FP80](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [VI-PU22-EXX](#) [LDIN5075](#) [432703037161](#) [LPM000-BBAR-08](#) [LPM000-BBAR-07](#) [08-30466-1055G](#) [DMB-EWG](#) [CQM1IPS01](#) [SP-300-5](#) [MAP40-S233](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0028G](#) [CA400](#) [H47251](#) [96PSR-A460WOTH-2](#) [G08-L](#) [G06-Q01](#) [GHA300F-12-SNF](#) [MTA040009A](#) [FSA150024A](#) [VI-RUR22-EWXX](#) [VI-PU03-EYW](#) [VI-QCWB3-CSV](#) [HLS30ZE-NT8](#) [UT1404-7](#) [ERP-350-12](#) [S8FSG01512C](#) [VI-PU22-EYY](#) [XPFM201A+](#) [S8FS-G15015C](#) [S8FS-G05005C](#) [S8FS-G03015C](#) [08-30466-020WG](#)