


Features

- ◆ Ultra compact 15W converter
- ◆ Ultra wide 4:1 input voltage range
- ◆ Cost efficient open frame design with industry standard pin-out
- ◆ Surface-mount (SM) and through-hole version
- ◆ I/O isolation voltage 2250V, rated for basic insulation
- ◆ Extended operating temperature range -40°C to $+85^{\circ}\text{C}$
- ◆ Remote On/Off
- ◆ Lead free design, RoHS compliant
- ◆ 3-years product warranty

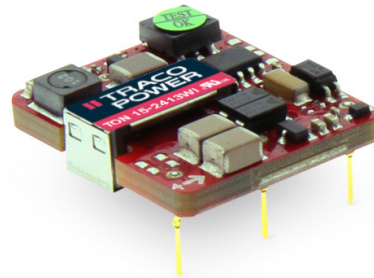

The TON-15WI series is a generation of high performance 15W dc-dc converters with ultra-wide input voltage range and precisely regulated output voltage. The ultra compact open frame design with industry standard pin-out provides the designer now a 50% smaller, cost efficient alternative to existing 10 to 15W converters in the market. Built-in filters for both input and output minimize the need for external filtering.

Further features include remote On/Off, output voltage trimming, over voltage protection and short circuit protection. Typical applications are distributed power systems, instrumentation and industrial electronics, everywhere where space on the PCB is a critical factor.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TON 15-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	4'000 mA	85 %
TON 15-2411WI		5.0 VDC	3'000 mA	87 %
TON 15-2412WI		12 VDC	1'300 mA	86 %
TON 15-2413WI		15 VDC	1'000 mA	86 %
TON 15-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	4'000 mA	85 %
TON 15-4811WI		5.0 VDC	3'000 mA	87 %
TON 15-4812WI		12 VDC	1'300 mA	86 %
TON 15-4813WI		15 VDC	1'000 mA	86 %

Add suffix **SM** for surface mount version

Input Specifications

Input current at no load	24 V; 3.3/5 Vout models: 24 V; 12/15 Vout models: 48 V; 3.3/5 Vout models: 48 V; 12/15 Vout models:	65 mA typ 10 mA typ. 40 mA typ 15 mA typ.
Input current at full load	24 V; 3.3 Vout models: 24 V; other output models: 48 V; 3.3 Vout models: 48 V; other output models:	680 mA typ. 790 mA typ. 340 mA typ. 390 mA typ.
Input voltage variation (dv/dt)		5 V/ms, max. (complies with ETS 300 132 part. 4.4)
Start-up voltage / under voltage lockout	24 V models: 48 V models:	9 VDC / 8 VDC 18 VDC / 16 VDC
Surge voltage (100 msec. max.)	24 V models: 48 V models:	50 V max. 100 V max.
Input filter		capacitor type (see application note for compliance to EN 55022 class A/B)
Radiated immunity		EN 61000-4-3 10 V/m, perf. criteriy A
Fast transient / surge		EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV perf. criteria A with external input capacitor e.g. Nippon chemi-con KY 220 µF, 100 V, ESR 48 mOhm
Conducted immunity		EN 61000-4-6, 3 Vrms, perf. criteria A
Reflected ripple current		30 mA _{p-p} typ.

Output Specifications

Voltage set accuracy		±1 %
Output voltage adjustment		±10 % (see application note)
Regulation	– Input variation Vin min. to Vin max – Load variation 0 – 100 %	0.2 % max. 0.2 % max.
Minimum load		0 % of rated max. load
Temperature coefficient		±0.02 %/K
Ripple and noise (20 MHz Bandwidth, measured with 1 µF M/C and 10 µF TC)		100 mV _{pk-pk} typ
Start up time	– Power On (constant resistive load) – Remote On	30 ms typ. 30 ms typ.
Transient response setting time (25% load step chang)		250 µs typ.
Short circuit protection		indefinite (automatic recovery)
Over load protection		at 150 % of Iout max., foldback
Over voltage protection	3.3 Vout models: 5 Vout models: 12 Vout models: 15 Vout models:	3.7 – 5.4 Vout 5.6 – 7.0 Vout 13.8 – 17.5 Vout 16.8 – 20.5 Vout
Capacitive load	3.3 Vout & 5.0 Vout models: 12 Vout models: 15 Vout models:	1'000 µF max. 330 µF max. 220 µF max.

General Specifications

Temperature ranges	– Operating – Storage	–40°C to +85°C (with derating) –55°C to +125°C
Derating		6.7 %/K above 75°C
Humidity (non condensing)		5 % to 95 % rel H

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

Thermal shock		acc. MIL-STD-810F
Vibration		acc. MIL-STD-810F
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)		>2.4 Mio. h
Isolation voltage (60 sec) – Input / Output		2'250 VDC (complies with basic insulation rating per EN 60950-1)
Isolation resistance – Input / Output		>1'000 M Ohm
Isolation capacitance – Input / Output		1500 pF max.
Switching frequency (Pulse width modulation PWM)	3.3 / 5 Vout models: 12 / 15 Vout models:	350 kHz typ. 400 kHz typ.
Remote On/Off	– On: – Off: – Off idle current:	3.0 to 15 VDC or open circuit. 0 to 1.2 VDC or short circuit pin 6 and pin 2 2.5 mA typ. negative remote On/Off logic on demand
Safety approvals	– Certification documents	UL 60950-1, EN 60950-1, IEC 60950-1 www.tracopower.com/overview/ton15wi
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU


Physical Specifications

Weight		10.5g (0.36oz)
Soldering profile for trough hole version		max. 265°C / 10 sec. (wave soldering)
Lead-free reflow solder process for SMD-package models		as per J-STD-020D.01 (to find at: www.jedec.org - free registration required)

Supporting documents: www.tracopower.com/overview/ton15wi

Outline Dimensions

SMD version (SM) thru hole version (TH)

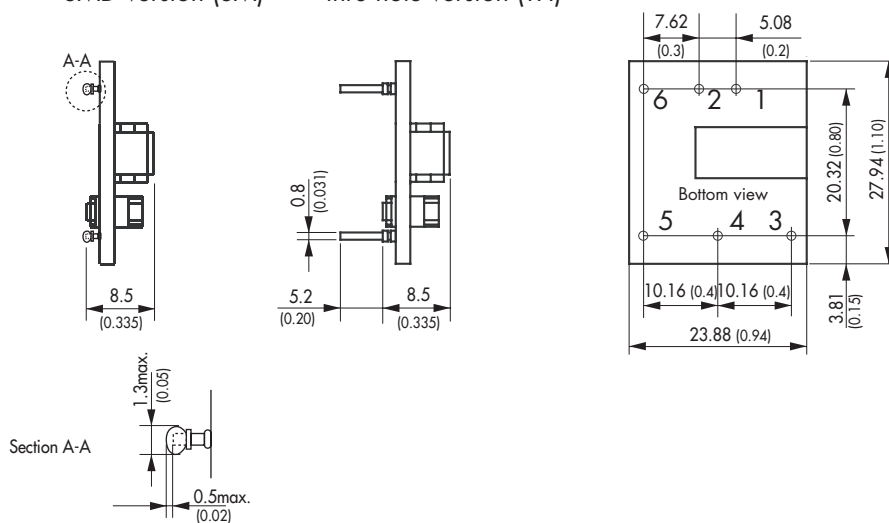

Pin-Out	
Pin	Single
1	+Vin (Vcc)
2	-Vin (GND)
3	+Vout
4	Trim
5	-Vout
6	Remote On/Off

Dimensions in [mm], () = Inch
Tolerances: ±0.5 (±0.02)
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [CE-1003](#) [CE-1004](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#)
[XGS-1205](#) [06322](#) [SPB05B-15](#) [L-DA20](#) [DCG40-5G](#) [XKS-2405](#) [DPA423R](#) [vi-m13-cw-03](#) [VI-L53-CV](#) [24IBX15-50-0ZG](#) [HZZ01204-G](#)
[SPU02L-09](#) [SPU02M-09](#) [SPU02N-09](#) [QUINT4-BUFFER/24DC/40](#) [QUINT4-CAP/24DC/5/4KJ](#) [73-551-5039I](#) [DFC15U48D15G](#) [SEN-6471-](#)
[1EM](#) [AHV2815DF/HBB](#) [MI-LC21-IX](#) [PAH-48/8.5-D48NB1-C](#) [BM3020-7A](#) [QRS2050P025K00](#) [CM2320-9EG](#) [SKMW15F-05](#)
[V300A28H400BF3](#) [TEN 15-1223](#) [TEQ 100-2418WIR](#) [TEQ 160-7218WIR](#) [R05C05TE05S-R](#) [HQA2W085W033V-N07-S](#) [AM1SS-2405SJZ](#)
[AM2DS-1224SJZ](#) [AM2DS-2405DJZ](#) [AM10SBO-4824SNZ-B](#) [AM15E-2405S-NZ](#) [AM2DS-1212SJZ](#) [AM30SBO-4805SNZ-B](#)
[LT8301ES5#WTRPBF](#)