

Features

- ◆ Semi-regulated output (load)
- ◆ Industry standard pinout
- ◆ High efficiency up to 87%
- ◆ I/O isolation voltage 3000 VDC
- ◆ Operationally reliable up to 5'000m altitude
- ◆ Operating temperature range
-40°C to +85°C
- ◆ 3-year product warranty



The TRV-1 series are ultra miniature, 1 Watt DC/DC-converters with high 3000VDC I/O-isolation and semi load regulation. They are the ideal solution to power drivers and circuits where unregulated DC/DC converters do not meet the input voltage range at load change.

Models				
Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
TRV 1-0511	5 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-0519		9 VDC	110 mA	86.5 %
TRV 1-0512		12 VDC	84 mA	87 %
TRV 1-0513		15 VDC	67 mA	87.5 %
TRV 1-1211	12 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-1219		9 VDC	110 mA	86 %
TRV 1-1212		12 VDC	84 mA	88 %
TRV 1-1213		15 VDC	67 mA	88 %
TRV 1-2411	24 VDC ±10%	5 VDC	200 mA	84 %
TRV 1-2419		9 VDC	110 mA	86.5 %
TRV 1-2412		12 VDC	84 mA	87.5 %
TRV 1-2413		15 VDC	67 mA	87.5 %

Input Specifications

Input current no load / full load	5 Vin models: 30 mA / 230 mA typ. 12 Vin models: 12 mA / 100 mA typ. 24 Vin models: 11 mA / 50 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Reflected input ripple current	5 Vin models: 11 mA typ. other models: 5 mA typ.
Input filter	internal capacitors
Reverse voltage protection	0.3 A max.
Recommended input fuse (slow blow type)	5 Vin models: 500 mA 12 Vin models: 200 mA 24 Vin models: 100 mA

Output Specifications

Regulation	– Input variation – Load variation	1.2 % / 1 % change Vin see graph 1 on page 3
Ripple and noise (20 MHz Bandwidth)		60 mV pk-pk max.
Temperature coefficient		±0.02 %/K
Short circuit protection		limited 0.5 sec. max.
Capacitive load –		220 µF max.

General Specifications

Temperature ranges	– Operating – Case temperature – Storage	–40°C to +85°C (without derating) +105°C max. –50°C to +125°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>2'000'000 h
Isolation voltage (60 sec.)	– Input/Output	3'000 VDC
Isolation capacitance	– Input/Output	60 pF typ.
Isolation resistance	– Input/Output	>1'000 Mohm
Switching frequency		100 kHz typ. (frequency modulation)
Frequency change over line and load		–50 / +20 kHz max.
Altitude during operation		up to 5'000 m (16'400 ft) approved
Safety approvals		IEC 60950-1:2005 (2nd edition) + Am 1:2009 EN 60950-1:2006 + Am 1:2010 + Am 11:2009 www.tracopower.com/overview/trv1
	– Certification documents	


Supporting documents: www.tracopower.com/overview/trv1

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Physical Specifications

Casing material		non conductive plastic (UL 94V-0 rated)
Weight	- 5 & 12 Vin models - 24 Vin models	2.2 g (0.07 oz) 2.6 g (0.09 oz)
Soldering temperature		max. 260°C, 10 sec, 1.5 mm from case
Environmental compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU

Graph 1: Load regulation

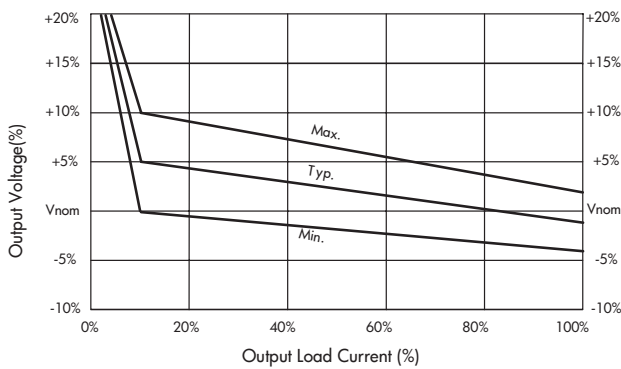

Outline Dimensions

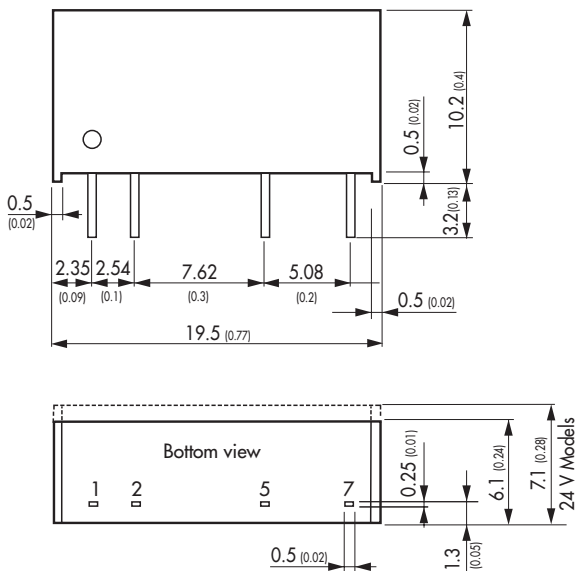

Pin-Out	
Pin	
1	+Vin (Vcc)
2	-Vin (GND)
5	-Vout
7	+Vout

Dimensions in [mm], () = Inch
Pin pitch tolerances: ± 0.13 (± 0.005)
Case tolerances: ± 0.25 (± 0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [TRACO Power](#) manufacturer:

Other Similar products are found below :

[PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [CE-1003](#) [CE-1004](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#)
[XGS-1205](#) [06322](#) [SPB05B-15](#) [L-DA20](#) [DCG40-5G](#) [XKS-2405](#) [DPA423R](#) [vi-m13-cw-03](#) [VI-L53-CV](#) [24IBX15-50-0ZG](#) [HZZ01204-G](#)
[SPU02L-09](#) [SPU02M-09](#) [SPU02N-09](#) [QUINT4-BUFFER/24DC/40](#) [QUINT4-CAP/24DC/5/4KJ](#) [73-551-5039I](#) [DFC15U48D15G](#) [SEN-6471-](#)
[1EM](#) [AHV2815DF/HBB](#) [MI-LC21-IX](#) [PAH-48/8.5-D48NB1-C](#) [BM3020-7A](#) [QRS2050P025K00](#) [CM2320-9EG](#) [SKMW15F-05](#)
[V300A28H400BF3](#) [TEN 15-1223](#) [TEQ 100-2418WIR](#) [TEQ 160-7218WIR](#) [R05C05TE05S-R](#) [HQA2W085W033V-N07-S](#) [AM1SS-2405SJZ](#)
[AM2DS-1224SJZ](#) [AM2DS-2405DJZ](#) [AM10SBO-4824SNZ-B](#) [AM15E-2405S-NZ](#) [AM2DS-1212SJZ](#) [AM30SBO-4805SNZ-B](#)
[LT8301ES5#WTRPBF](#)