

## AWSP150-24

### Description:

The AWSP150-24 is a single output power supply. This power supply is designed for a wide variety applications where high reliability is desired, including applications for the industrial and telecommunications markets. Excellent performance specifications are provided, together with compliance to European EMC (EN55022, Class B and EN61000-3-2), and Low Voltage directive.

### Specifications (@25C)

#### Input Characteristics:

<b>Input Voltage:</b>	88-264Vac
<b>Input Frequency Range:</b>	47-63Hz
<b>Max Input Current:</b>	2.7A @ Vin (rated)
<b>Max Inrush Current:</b>	20A@110Vac, 40A@220Vac at cold start
<b>Power Factor:</b>	>0.92
<b>Leakage Current:</b>	<3.5mA/240Vac

#### Output Characteristics:

<b>Output Voltage:</b>	24Vdc
<b>Output Current:</b>	6.3A
<b>Output Power:</b>	150W
<b>Adjustable Output Range:</b>	±10%
<b>Ripple &amp; Noise:</b>	240mV
<b>Load Regulation:</b>	±0.5%
<b>Line Regulation:</b>	±0.5%
<b>Efficiency:</b>	83%
<b>Temperature Drift:</b>	<0.03%/°C (10-50°C)
<b>Start-up Time:</b>	300ms max @ 230VAC
<b>Hold-up Time:</b>	20ms min, 100% Load@230Vac
<b>Rise-up Time:</b>	600ms max, 100% Load@230Vac
<b>Over Current Protection:</b>	At 105%<Load<150%
<b>Over Voltage Protection:</b>	At 125%<Load<145%@I/P:115/230VAC. Reset by recycle AC ON/OFF

#### General Specifications:




<b>Switching Frequency:</b>	134kHz (PWM) / 67kHz (PFC)
<b>Dimension (LxWxH):</b>	199x98x42
<b>Weight:</b>	560g net, 610g gross
<b>Cooling:</b>	Natural Convection
<b>Isolation Resistance:</b>	I/P—O/P, I/P—FG, O/P—FG: 500VDC/100Mohms
<b>Dielectric Strength:</b>	I/P—O/P: 4.3KVdc; I/P—FG: 2.5KVvac; O/P—FG: 0.5KVvac
<b>Warranty:</b>	2 years

#### Environmental Specifications:


<b>Operating Temperature:</b>	-10° to 60°C
<b>Operating Humidity:</b>	20 to 90% RH, non-condensing
<b>Storage Temperature:</b>	-25 to 75°C
<b>Storage Humidity:</b>	10 to 95% RH, non-condensing
<b>Vibration:</b>	10-55Hz, 2G 1min/cycle, period of 60min, each X, Y & Z axis

#### EMC & Safety Specifications:

<b>EMC Emissions:</b>	Conforms to EN55022, VCCI, CISPR22 Class B (Conducted & Radiated); IEC-61000-4-2, 61000-4-4, 61000-4-5, 61000-4-11
<b>ESD Susceptibility:</b>	EN61000-4-2 (15kV/8kV)
<b>Radiated Susceptibility:</b>	EN61000-4-3 (3V/m)
<b>Fast Burst:</b>	EN61000-4-4 (2kV)
<b>Surge:</b>	EN61000-4-5 (1kV/2kV)
<b>Safety Approval:</b>	UL 60950 (UL File No: E204980)

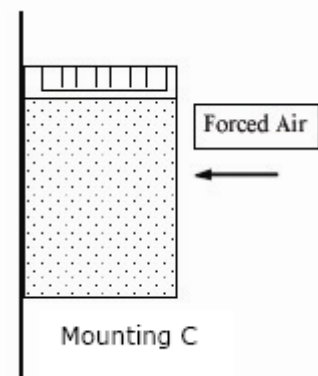

### Outline Dimensions (mm):

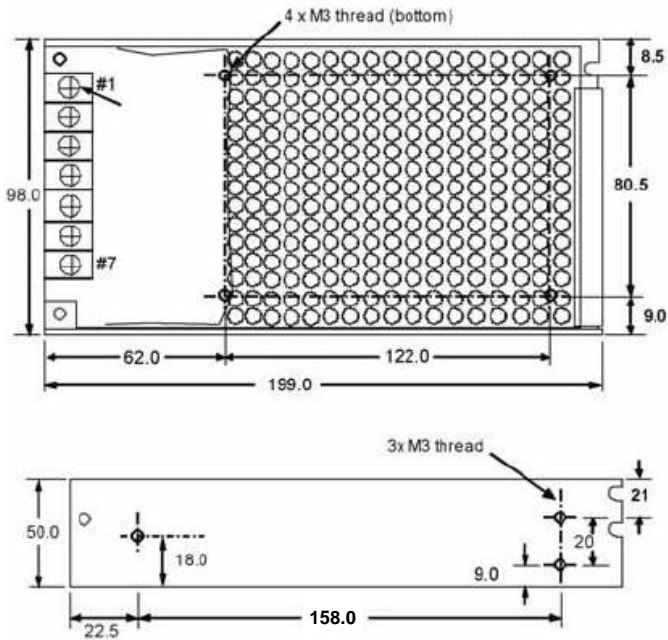


### TERMINAL SCREW ASSIGNMENT

- # 1,2 : AC INPUT
- # 3 : FG
- # 4,5 : DC OUTPUT -V
- # 6,7 : DC OUTPUT +V

Unit : mm  
Tolerance : +/-1.0mm

### Derating Curve:

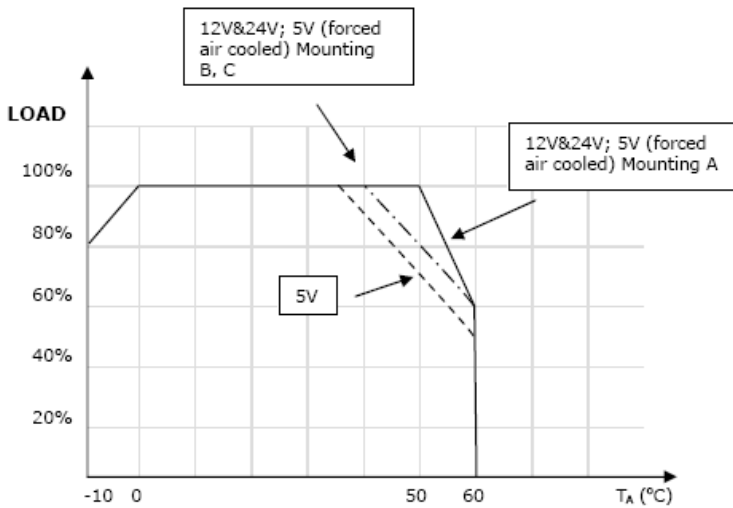

### Connector Types:

**Input:** Screw Terminals  
**Output:** Screw Terminals

**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [Triad](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)  
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)  
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)  
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)  
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [VI-](#)  
[LUL-EU](#) [EP3000AC48INZ](#) [VP-C2104853](#)