

F-166XP

Electrical Specifications (@25C)

1. Maximum Power: 7.5 VA
2. Primary: 115V 50/60 Hz
3. Secondary No 1: 24.0V CT @ 0.125 Amps
Secondary No 2: 9.0V CT @ 0.500 Amps

Description:

The F-166XP is part of a wide selection of plug-in types that meet the needs of PC boards and solid state power supply design. This transformer can satisfy power as well as control and instrumentation applications.

Construction:

Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

Safety:

These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings.

Dimensions:

Units: In inches

A	B	C	D	E	F	G
1.625	2.812	1.468	1.953	.250	1.312	2.375


Mounting holes: 0.187 in.

Pin length: 0.187 in.

Pin size: 0.20 x .041 in.

Weight: 10.5 oz





Schematic:



Primary: 1 to 2
Secondary No.1: 3 to 5
Secondary No.2: 6 to 8

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>

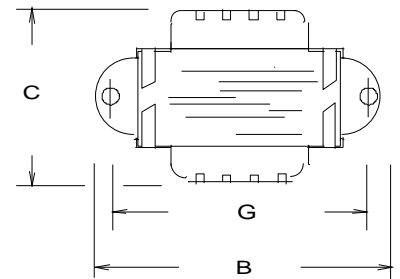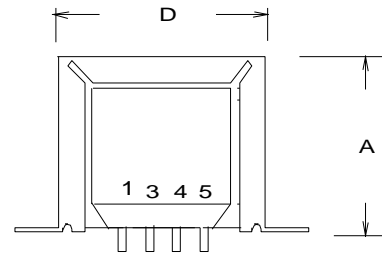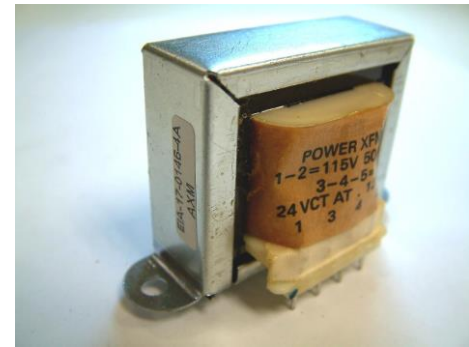

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triad manufacturer](#):

Other Similar products are found below :

[F36-170-C2-B](#) [D-105](#) [D-164](#) [D-205](#) [D-238](#) [D-245](#) [D-267](#) [D-281](#) [D-285](#) [D-311](#) [D-323](#) [D-343](#) [D-355F](#) [D-365F](#) [D-371](#) [D-373](#) [D-378F](#) [D-379F](#) [D-380F](#) [MCB-9](#) [F-178SX](#) [F-191U](#) [F-212Z](#) [F-23U](#) [F-264U](#) [F-283U](#) [F-346X](#) [F-44X](#) [F-47U](#) [F-60U](#) [FIRCH-5](#) [FP88-130](#) [G-336](#) [G-388](#)
[PL-20](#) [A-112X](#) [A-114X](#) [A-118X](#) [A-14J](#) [A-300X](#) [A-301X](#) [A-304X](#) [A-42Z](#) [A-54X](#) [A-68J](#) [A-6X](#) [A-77J](#) [A-95X](#) [R-104B](#) [R-124BC](#)