

POWER TRANSFORMER Chassis Mount: Single Secondary

F-54X

Electrical Specifications (@25C)

- 1. Maximum Power: 52.5 VA
- 2. Primary: 115V 50/60 Hz
- 3. Secondary: 35.0VCT @ 0.800 Amps
- 4. Voltage Regulation: 10 % TYP @ full load to no load
- 5. Temperature Rise: 35C TYP (45C MAX allowed)

Description:

The F-54X is part of a series which has a long history of reliable service in the field, made from a proven design and constructed with UL recognized materials.

Construction:

Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

Safety:


These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings as well as between the primary / secondary windings and the core.

Dimensions:		Units: In inches	
А	В	С	D

 2.593
 4.0
 2.250
 3.562

 Mounting Hole Diameter: .187 in Lead length: 7.0 inches ± 1 inch Weight: 2.20 lbs
 1

Schematic:



Primary: Black to Black Secondary: Red to Red


RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571





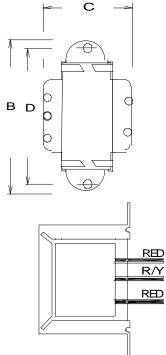



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Triad manufacturer:

Other Similar products are found below :

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F-364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02