

N-9M

Electrical Specifications (@25°C)

1. Maximum Power: 1,250 VA
2. Input Voltage: 230 V, 50 / 60 Hz
3. Output Voltage: 115V \pm 5%
4. Full Secondary Load: 10.85 Amps RMS

Description:

The N-9M is part of the line of Auto-Transformers that are single winding transformers in which the secondary coil is a fraction of the entire winding for voltage step-down. This causes part of the power to be transferred conductively through the windings, rather than all of the power being transferred by induction.

Safety:

These units are designed with 1500V isolation between the winding and the core. Materials and construction are rated for Class B insulation system.

Dimensions:

Unit: In inches


A	B	C	D	E
5.40 Max	4.60 Max	6.20 Max	3.50 \pm 0.030	4.58 \pm 0.125

Weight: 21.0 lbs

Mounting Holes: .656 x 281




Connections: 6 ft. long cord, 1-15P NEMA Plug, 1-15R NEMA Receptacle

Schematic:

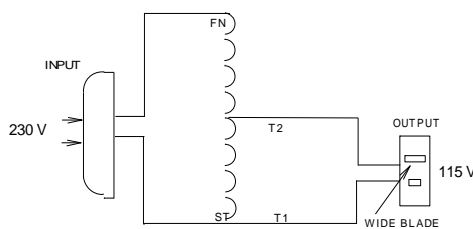

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

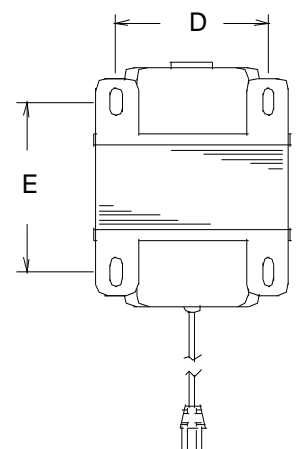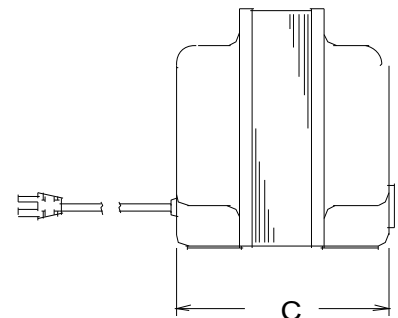

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triad manufacturer](#):

Other Similar products are found below :

[F36-170-C2-B](#) [D-105](#) [D-164](#) [D-205](#) [D-238](#) [D-245](#) [D-267](#) [D-281](#) [D-285](#) [D-311](#) [D-323](#) [D-343](#) [D-355F](#) [D-365F](#) [D-371](#) [D-373](#) [D-378F](#) [D-379F](#) [D-380F](#) [MCB-9](#) [F-178SX](#) [F-191U](#) [F-212Z](#) [F-23U](#) [F-264U](#) [F-283U](#) [F-346X](#) [F-44X](#) [F-47U](#) [F-60U](#) [FIRCH-5](#) [FP88-130](#) [G-336](#) [G-388](#)
[PL-20](#) [A-112X](#) [A-114X](#) [A-118X](#) [A-14J](#) [A-300X](#) [A-301X](#) [A-304X](#) [A-42Z](#) [A-54X](#) [A-68J](#) [A-6X](#) [A-77J](#) [A-95X](#) [R-104B](#) [R-124BC](#)