

## TLD1020-24

### Description:

The TLD1020-24 is a compact and lightweight Constant Voltage Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LED's, Lighting, etc.

### Specifications (@25C)

#### Electrical Specifications:

|                               |   |
|-------------------------------|---|
| <b>Input Voltage:</b>         | 100-304Vac <sup>1</sup>   |
| <b>Input Frequency Range:</b> | 47-63Hz   |
| <b>Max Input Current:</b>     | 0.3A @ 115Vac; 0.15A @ 230Vac   |
| <b>Max Inrush Current:</b>    | <5A@115Vac, 10A@220Vac  |
| <b>Power Factor:</b>          | >0.9 at full load, 115Vac   |
| <b>Output:</b>                | 24Vdc±5%, .830Adc Max   |
| <b>Crest Factor (Ipk):</b>    | 1.5 Max.  |
| <b>Leakage Current:</b>       | 300µA Typical   |
| <b>Efficiency:</b>            | 84% Typical at full load  |
| <b>Maximum power:</b>         | 20W   |
| <b>Current Accuracy:</b>      | ±1% (when applicable)   |
| <b>Load Regulation:</b>       | ±3%   |
| <b>Hold up time:</b>          | Half cycle minimum at 120 VAC and 80% of rated voltage                    |
| <b>Protection:</b>            | Over-voltage, Over current and Short circuit protection:<br>Auto-recovery |

#### Environmental Specifications:

|                               |  |
|-------------------------------|--|
| <b>Operating Temperature:</b> | -30 to 60°C (De-rating: 1%/°C from 60-70°C)                    |
| <b>Storage Temperature:</b>   | -40 to 85°C  |
| <b>Operating Humidity:</b>    | 5 to 95% RH (non-Condensing)                                   |
| <b>Cooling:</b>               | Convection cooling   |
| <b>Vibration:</b>             | 5 to 50Hz  |
| <b>MTBF:</b>                  | >100,000 Hours at full load and 25°C ambient conditions        |
| <b>EMC:</b>                   | Compliant to 47CFR, Part 2, Part 15 and Cispur PUB, 22 Class B |

#### General Specifications:

|                            |  |
|----------------------------|--|
| <b>Connections:</b>        | 5in leads - Input: 18 AWG; Output: 18 AWG, Black (-), Gray (+) |
| <b>Dimensions (WxLxH):</b> | 40.0x95.0x25mm   |
| <b>Weight:</b>             | 120g   |
| <b>Warranty:</b>           | 3 years @ 40°C, 100% Load                                      |


#### Safety Standards:

|                   |                           |
|-------------------|---------------------------|
| <b>Standards:</b> | UL (cUL) 1310, UL48<br>CE |
|-------------------|---------------------------|



**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

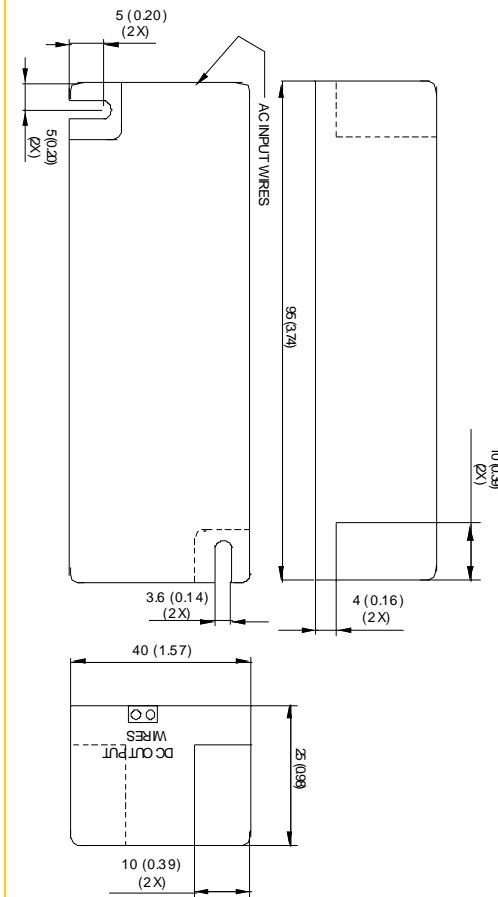

<sup>1</sup> Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Triad](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [LN1224CV](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 18W 24V ONE4ALL SC PRE](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#) [LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [PWM-40-36](#) [PWM-60-36](#)