

Wall Plug – Ins - Interchangeable

WSX120-2000

Electrical Specifications (@25C)

- 1. Input Voltage rating: 100-240VAC, 50-60Hz
- 2. Input Voltage range: 90-264VAC
- 3. Input current: 0.7Å(RMS) @ 115VAC
- 4. Max Inrush Current: 60A @ 115VAC (Cold start)
- 5. Output Voltage: 12.0VDC
- 6. Output Current: 2.0A
- 7. Regulation (line & load): ±5%
- 8. Ripple: 150mVpk-pk Max
- 9. No load power (stand by): < 100 mW typ.
- 10. Efficiency @ 10% load: 82.68% typ.
- 11. Average Efficiency: 83.50% Typ. Meets minimum level VI efficiency.

Environmental Specifications

- 1. Operating Temperature Range: 0°C to +45° C @ full load
- 2. Storage Temperature Range: -20°C to 60°C
- 3. Humidity: 5% to 95%, Non-condensing

Reliability Specifications

- 1. Leakage Current: <0.25mA (264VAC)
- 2. Dielectric Strength (Hi-pot): 4242VDC/3secs., 5mA Max
- 3. Warranty: 5 years

Mechanical Parameters

Case Type: Thermoplastic molded enclosure. Output Cord: 20 AWG, 6 Ft. Long Nom.

Safety & EMI

UL: 62368-1 Class II, Double Insulated UL File Number: E345519 TUV: IEC 62368-1:2014 (Second Edition) AS/NZS: AS/NZS 62368.1:2018 & AS/NZS 3112:2017 GS (S50452256): EN 62368-1: 2014 + A11 RCM: RCM201901745 Rev01 EMI standard: FCC part15 Subpart B, ICES-003 Issue 6, ANSI C63.4-2014 Over voltage and short circuit protected




EISA 2007/CEC Compliance: This power supply meets the minimum efficiency requirements per Department of Energy and California Energy Commission.

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



460 Harley Knox Blvd. Perris, California 92571

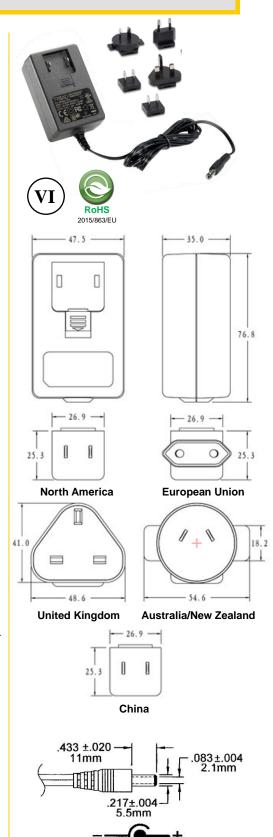



Publish Date: October 19, 2021

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wall Mount AC Adapters category:

Click to view products by Triad manufacturer:

Other Similar products are found below :

ADP-163 E ADP-167 J ADP-168 K ADP-159 A ADP-165 G PSAC05A-050L6 RLMDT361800 P25A14E-R1C DA10-050CH DA5-050US-B DA10-050UK RLMDT701800 WSU120-2000-R13 WSU180-1330-13 AC-DC ADAPTER 160W WSU120-2000-13 WSU150-0800-13 WSU075-3200-13 WSU060-2000-R13 WSU090-2500-13 WSU050-2000-R13 WSU240-1000-13 WSU240-0500-R13 WSU075-1500-13 WSU050-3000-13 WSU120-1500-13 WSU120-1500-R13 WSU045-1500-13 WSU240-0750-13 WSU090-2500-R13 WSU240-1500-13 WSU180-0660-13 WSU075-1500-R13 WSU090-1300-13 WSU180-1330-R13 BB-SMI1812VP230C1 WSU050-1500-13 WSU090-0800-13 WSU120-0700-13 WSU045-3000-13 WSU180-0450-13 WSU150-0560-R13 WSU135-0880-13 WSU120-3000-13 WSU120-1000-R13 WSU090-1300-R13 WSU060-1250-R13 WSU060-1250-R13 WSU045-2000-R13 WSU045-1500-R13