

94 Series

LCD Electronic Totalizer



A 6 figure, battery powered, push-button or key reset, electronic counter, available in base mount or panel mount configuration. No external power supply is required. Large 0.50" [12mm] LCD figures for fast, easy reading. Operates at 6-240 VAC or VDC. Long lasting internal lithium battery. Attractive styling and silent operation make these models equally well-suited for lab or office equipment applications.

Key Features

- No external power supply needed
- Long life lithium battery
- Large easy reading display
- Operates at 6 to 240 VAC or VDC

Applications


- Office equipment
- Production
- Test Labs
- Control Panels

Specification

Figures	6 LCD figures, 0.50" [12mm] high
Reset	Push-button, or lock and key
Speed	0-40 counts/second, (min. 12.5ms - on, 12.5ms - off)
Input	6-240VAC or VDC
Mount	Base or panel
Terminations	(2) #22 AWG 221°F [105° C] wire leads, 8" [203mm] long
Power Source	Internal lithium battery
Temp. Range	-14°F to +122°F [-26°C to +50°C]
Weight	18 oz. [510g]


Dimensions

Base Mount

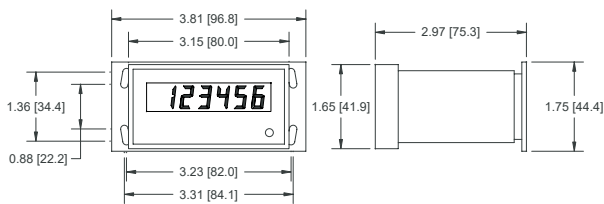


Mounting holes: 0.14" x 0.24" [3.6mm x 6.1mm] slots

Panel Mount

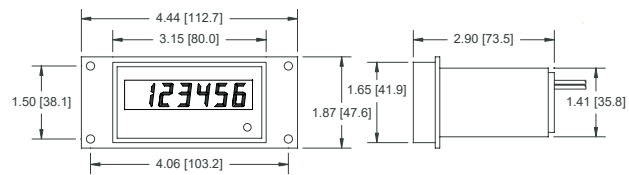

Panel cutout: 3.0" x 1.75" [76.2mm x 44.5mm]
Mounting holes: 0.17" [4.3mm] Dia.

Panel Mount/Lock & Key Reset

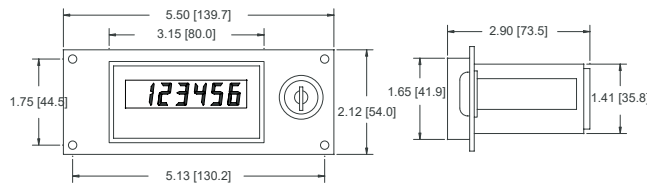

Panel cutout: 4.75" x 1.50" [76.2mm x 44.5mm]
Mounting holes: 0.17" [4.3mm] Dia.

Part Numbers

- 9415-001** 6 figure, base mount, push-button reset
- 9415-003** 6 figure, panel mount, push-button reset
- 9415-005** 6 figure, panel mount, lock and key reset

Note: Load resistor (1500 ohms 10 watts) across input terminals required when using AC sensors



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Counters & Tachometers](#) category:

Click to view products by [Trumeter](#) manufacturer:

Other Similar products are found below :

[LC2H-F-2K-N](#) [LC2H-F-DL-2K-N](#) [LC2H-FE-2K-N](#) [LC2H-FE-DL-2K-N](#) [LC2H-FE-FV-30-N](#) [LC2H-F-FV-30-N](#) [H7CRBVGAC24DC1224](#)
[LC24-F-N](#) [LC2H-F-DL-2K-NB](#) [LC2H-F-DL-30-NB](#) [LC2H-FE-DL-2K-NB](#) [LC2H-FE-DL-30-N](#) [GPMZC-SET](#) [26546848](#) [2-1006](#) [9415-003](#)
[H127.010A01H](#) [H5KLR-11](#) [100-240V AC/DC](#) [3.550.401.351](#) [LC2H-C-2K-N](#) [LC2H-C-30-N](#) [1-4615](#) [1-4625](#) [1-4635](#) [1.150.510.012.550](#)
[1.150.510.013.550](#) [1.150.510.054.550](#) [1.150.510.056.550](#) [6.520.012.300](#) [6.560.010.300](#) [SLE-73-1400-1-4-01](#) [SLIK-94-1521-1-3-001](#) [SLN-](#)
[94-1421-1-3](#) [SPI-73-1411-1-3-011](#) [SPI-73-1411-1-4-011](#) [CT6S-1P4](#) [LC4H-R4-DC24V](#) [CT6S-2P4](#) [H127.010A01G](#) [H5KLR-11](#) [12-48V](#)
[AC/DC](#) [H5KLR-8B](#) [12-48 AC/DC](#) [H7ER-NV1](#) [H8DA](#) [12-48V AC/DC](#) [87622062](#) [99778714](#) [99776924](#) [3400-0000](#) [CLI-02](#) [E53-COV19](#)
[FX4S-1P4](#)