

APM-MAX

M21 and M23



Designed for a wide range of power monitoring applications, the APM-MAX combines the instant visual representation of an analog meter with the speed and accuracy of a digital meter for instant recognition and precision measurement. The large 81.5mm x 66mm display features a two-line display, programmable scale, alarm set-points and color-changing, full color RGB backlight for instant alerts.

APM-MAX-M21: for high voltage applications; configurable as an ammeter, volt meter, frequency meter or power monitor (Watts, VA & Power Factor).

APM-MAX-M23: for low voltage applications; configurable as a process meter or to be used in conjunction with a shunt.

Both models feature digital and analog outputs and serial MODBUS® RTU as standard (ethernet MODBUS® also available) for communication with other components in a system as well as an IP65 rating and our industry leading three-year warranty.

Key Features

Large multi-format display that incorporates:

- 60 segment bar graph display
- Large 4 digit display
- Separate Starburst display area for annunciators, custom messages and alarm information
- Full color RGB dynamic backlight for user alerts

Specifications

MEASUREMENT	M21	M23
Input range (V1)	0-600V DC/AC 47-63Hz	0-10V DC
Input range (V2)	-	0-5A DC
Current Input range (Direct)	0-5A DC/AC 45-65Hz	0-50mA DC
Current Input range (w/shunt)	0-500mV DC	0-500mV DC
Frequency (AC)	0-400Hz	0-400Hz
Power Measurement	Watts, VA & Power Factor	-
Accuracy (DC & Frequency)		0.1%
Accuracy (AC)		0.5%
Display modes		RMS
ENVIRONMENTAL		
Temperature - operating		-10 to +60°C
Temperature - storage		-40 to +70°C
IP rating (from the front)		IP65
POWER SUPPLY		
Universal (AC)		100-240 V AC (50-60Hz)
Low Voltage (DC)		12-24V AC/DC (50-400Hz AC)^
DISPLAY		
Number of digits		4
Digit height		14.5mm [0.57"]
Digit height of annunciator		6.8mm [0.27"]
Number of message characters		4
Backlight colors		Full RGB backlight and White
LCD display		Positive or Negative
OUTPUTS		
Max voltage		34V
Max current		500mA
Analog output		4-20mA or 0-10V
COMMUNICATION		
Modbus®		RTU and/or TCP/IP
CERTIFICATION		
		UL and cUL [^] , CE

[^] Units with Low Voltage power supplies are not UL compliant


Programmable:

- Scaling and Range (min and max)
- Custom annunciators
- User selectable backlight color and intensity
- Two independent alarm set-points
- Two independent outputs
- 4-20mA analog monitor output

Visibility:

- The largest display of any APM
- User adjustable RGB backlight provides an almost infinite range of colors for different requirements or environmental conditions.
- Wide viewing angle (both horizontal and vertical)
- Custom annunciators

Dimensions:

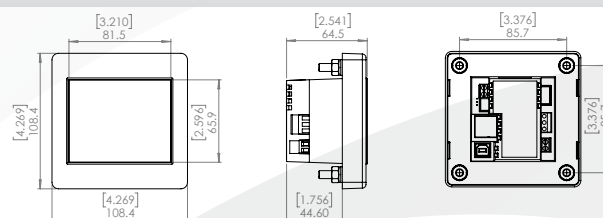

Panel cutout: Square: 68mm x 68mm [2.7" x 2.7"] Circle Diameter: 96mm [3.8"]

Part Numbers

Standard Models - Modbus RTU

- APM-MAX-M21-PU-4R** Positive LCD, volt, amp, freq or power monitor, RTU
- APM-MAX-M23-PU-4R** Positive LCD, process or shunt meter, RTU
- APM-MAX-M21-NU-4R** Negative LCD, volt, amp, freq or power monitor, RTU
- APM-MAX-M23-NU-4R** Negative LCD, process or shunt meter, RTU

Standard Models - Modbus TCP/IP and RTU

- APM-MAX-M21-PU-4B** Positive LCD, volt, amp, freq or power monitor, TCP/IP and RTU
- APM-MAX-M23-PU-4B** Positive LCD, process or shunt meter, TCP/IP and RTU
- APM-MAX-M21-NU-4B** Negative LCD, volt, amp, freq or power monitor, TCP/IP and RTU
- APM-MAX-M23-NU-4B** Negative LCD, process or shunt meter, TCP/IP and RTU

Options

DESCRIPTOR	DEFINITION	OPTIONS
-?X-XX	LCD Type	P - Positive N - Negative LCD also available*
-X?-XX	PSU Type	U - Universal 100-240V AC 45-65 Hz L - Low Voltage 12-24V DC / AC 45-65Hz also available*
-XX-?X	Analog Output	4 - 4 to 20mA / 0 - 20mA switchable 1 - 0 to 10V DC also available*
-XX-X?	Communications	R - Modbus® RTU B - Modbus® TCP/IP and Modbus® RTU

*MOQ dependant



Trumeter (The Americas)
 6601 Lyons Rd, Suite H-7
 Coconut Creek, Florida
 FL 33073,
 USA
 Tel: +1 954 725 6699
 Email: sales.usa@trumeter.com

Trumeter (Europe)
 Pilot Mill
 Alfred Street
 Bury,
 BL9 9EF
 Tel: +44 161 674 0960
 Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd
 Lot 5881, Lorong Iks Bukit Minyak 1
 Taman Perindustrian Iks, 14000 Bukit Tengah
 Penang, Malaysia
 Web: www.idtworld.com
 Tel: + 604 5015700
 Email: sales.my@idtworld.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Trumeter manufacturer](#):

Other Similar products are found below :

[022128-01](#) [10007-009S](#) [1-0734](#) [1-0764](#) [1-0794](#) [1-2235](#) [1-4615](#) [1-4635](#) [1-4635T](#) [1-4645](#) [1-CR-35](#) [1-CU-13](#) [1-CU-24](#) [1-CU-33](#) [1-CU-34](#) [1-CU-44](#) [2-0734](#) [2-0764](#) [2-1007](#) [2-1017](#) [2-1041-10/1-115AC](#) [21-2936-1](#) [2-1525-115AC](#) [2-2735](#) [2-2936](#) [2-4016](#) [2-4615](#) [2-4815-115AC](#) [2-4816-115AC](#) [2-4817-115AC](#) [3-1804](#) [3-2835](#) [3410-0000](#) [3410-1000](#) [4-0734](#) [5003-009](#) [5003-010](#) [5003-011](#) [5003-013](#) [5003-017](#) [5300-0200](#) [5321-1000](#) [5321-1100](#) [6-2835](#) [6300-1000-0000](#) [6320-0000-0000](#) [6320-1000-0000](#) [6320-2500-0000](#) [710-0001](#) [710-0002](#)