



# APM Power Meter

For single-phase, split-phase & 3-phase mains networks

## Advanced Panel Meter (APM)

**Programmable dynamic backlight color**



Warning flash

**1%**  
Accuracy


Combined **digital and bar graph** display



**Ten user configurable alarms**



**Programmable scale**  
Measure **single-, split- and 3-phase**



**2 Digital Outputs**  
**1 Analog Output**



**USB port for custom user settings via the free easy-to-use software**



**Front panel navigation buttons**

### Instantaneous:

- Voltage (L-L and L-N)
- Current (L-L and L-N)
- Reactive Power (VAR)
- Active Power (W)
- Apparent Power (VA)
- Frequency (Hz)
- Power Factor (PF)
- THD Voltage & Current
- % Max Load
- Alarm Status (available on Modbus communication)
- Phase Angle (available on Modbus communication)

### Networks:

- Single phase, 2-wire
- Single phase, 3-wire (split-phase)
- 3-phase, 3-wire
- 3-phase, 4-wire



**Modbus®**  
RTU Connectivity

**Less than 75mm deep**



## Key Features

- For single-, split- and 3-phase applications.
- Measures Active (W), Reactive (VAR) and Apparent (VA) power.
- Displays electrical parameters on large, backlit LCD display.
- Features two independent opto-isolated digital outputs plus one analog 4-20mA output.
- Includes MODBUS® RTU communication as standard.
- Provides clear indication of electrical circuit performance.
- User-programmable scale and custom alarm messages display critical parameters and immediately alerts operators when a parameter is out of range.
- Programmable Current Transformer (CT) and Potential Transformer (PT) ratios.

## Specifications

### NETWORKS MEASUREMENT

Frequency	45 - 65 Hz
Voltage measurement range	L-L 0 - 600VAC L-N 10 - 300VAC
Programmable PT range	1:1 to 1000:1
Current measurement range	0 - 5A
Programmable CT range	1:1 to 1000:1
Accuracy	1% (THD 5%) of full scale

### ENVIRONMENTAL

Temperature - operating	-10 to +50°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	IP65, NEMA type 4 and NEMA type 12

### POWER SUPPLY

Input	100 - 277 VAC
Supply frequency	50-60Hz
Max power	2W

### DISPLAY

Backlight colors	Red, Green, White
------------------	-------------------

### DIGITAL OUTPUTS

Number	2
Type	Opto-Isolated
Operating modes	Momentary
Max voltage	24VDC
Max sink current	15mA

### ANALOG OUTPUTS

Number	1
Analog output	4-20mA


### COMMUNICATION

CERTIFICATION	Modbus® RTU CE, RoHS, UL
---------------	-----------------------------


1P2W, 1P3W, 3P3W, 3P4W,

## Wiring Diagrams and Isolation


### Single phase 2-wire (1P2W)

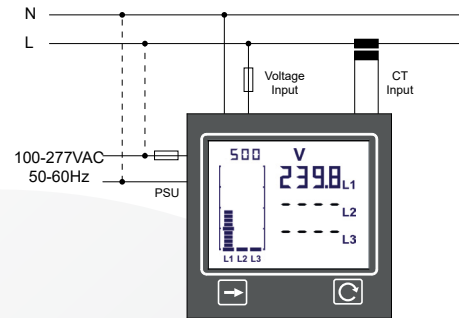


### 3 phase 3-wire (3P3W)

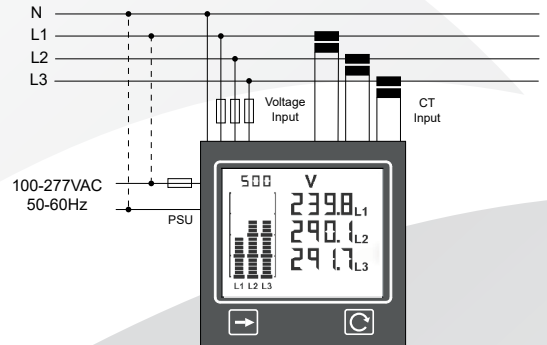


### Control Outputs



### Isolation

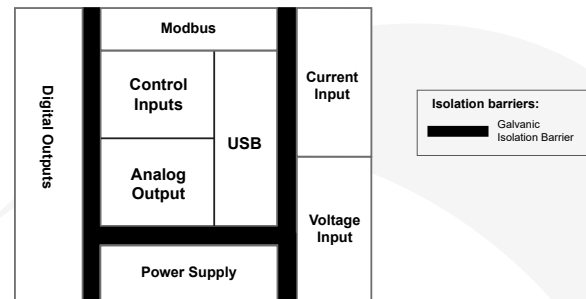

## Dimensions:

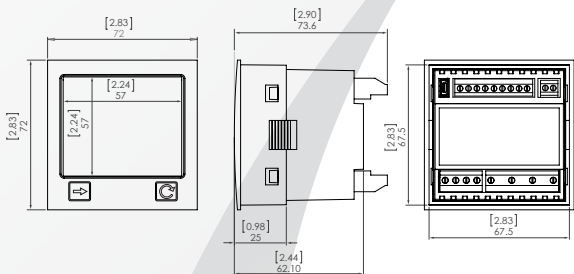

Panel Cutout:  
68mm x 68mm  
[2.68" x 2.68"] as per  
DIN43700/IEC61554

## Part Numbers

APM-PWR-APO  
APM-PWR-ANO  
APM-PWR-XXX

APM Power Meter, Positive LCD  
APM Power Meter, Negative LCD (subject to MOQ and extended lead time)  
Custom Option



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Panel Meters](#) category:*

*Click to view products by [Trumeter](#) manufacturer:*

Other Similar products are found below :

[70.360.4828.0](#) [72331-00](#) [85310-25](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [20046-20](#) [20182-23](#)  
[AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [20078-20](#) [87166-00](#) [87895-00](#) [28000-03](#) [82322K-11](#) [20125-](#)  
[21](#) [86640-00](#) [2CSM310060R1001](#) [2CMA100180R1000](#) [2CMA100183R1000](#) [2CMA103572R1000](#) [F451730](#) [F452710](#) [LE-03M-CT](#) [50626](#)  
[50900](#) [DMA-3-CT](#) [50628](#) [APM-RATE-APO](#) [50899](#) [50629](#) [039-40202-0100-10/20A-0-10/20A](#) [039-40135-0000-0-20MA](#) [039-40125-0060-0-](#)  
[60MV-0-60A](#) [039-40125-0100-0-60MV-0-100A](#) [039-40125-0200-0-60MV-0-200A](#) [039-40125-2000-0-60MV-0-2000A](#) [039-70135-0000-0-](#)  
[20MA](#) [039-70123-0050-5A-0-5A](#) [039-70123-0250-25A-0-25A](#) [039-70123-0400-40A-0-40A](#) [039-70125-0100-0-60MV-0-100A](#) [039-70125-](#)  
[0150-0-60MV-0-150A](#)