




# Rate Meter

APM

Easy to Use. Easy to Read.

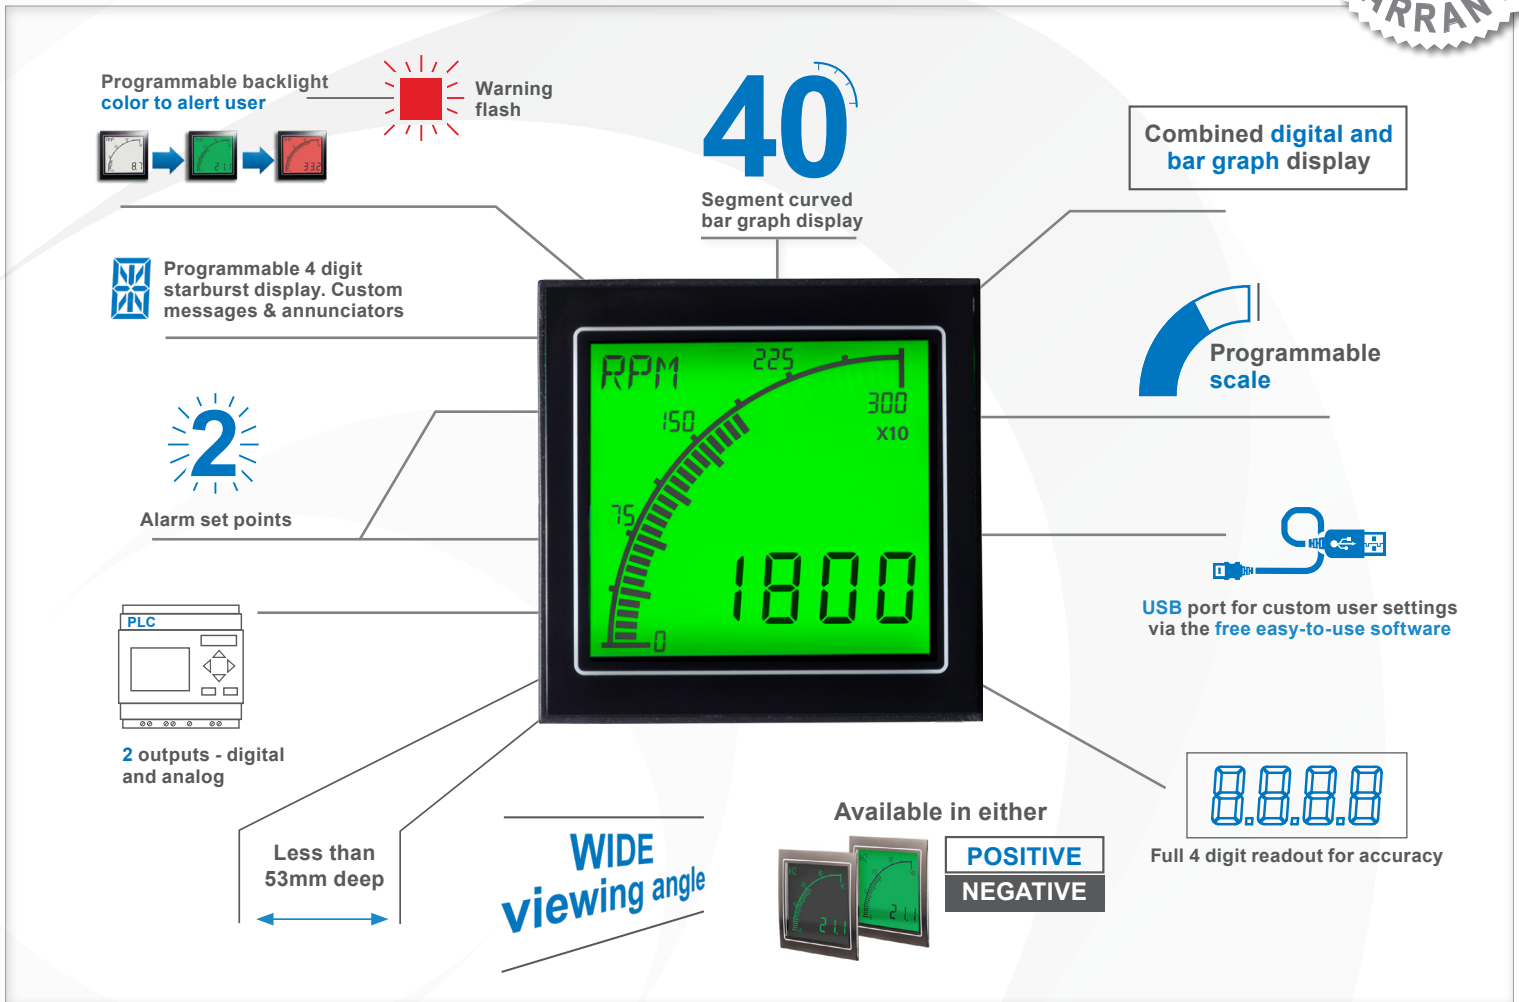

The Advanced Panel Meter (APM) Rate Meter was developed for use in flow applications, production lines and motorspeed monitoring. It combines the instant visual representation of an analog meter with the speed and accuracy of a digital meter. The unique display is viewable in most environmental conditions and features a programmable scale and color changing backlight for instant recognition and precision measurement.

The APM improves safety and efficiency through user programmable alarm set-points, dynamic backlighting and starburst messaging that alerts operators of changing conditions instantly. It features digital and analog outputs to communicate with other components in a system, IP65 and NEMA type 4 and 12 ratings and an industry leading three-year warranty.

## Key Features

### Large multi-format display that incorporates:

- 40 segment bar graph display
- Large 4 digit display
- Separate Starburst display area for annunciators, custom messages and alarm information
- Dynamic backlight colour

### Programmable:

- Scale and Gain
- Custom annunciators
- User selectable backlight color and intensity
- Two independent alarm set-points
- Two independent outputs
- 4-20mA analogue monitor output

### MEASUREMENT

Max Frequency	0 - 60 KHz
Min Frequency	0.001 Hz
Logic 0	< 1.2V
Logic 1	> 2.0V
Accuracy	±0.01%

### MAX WORKING

Voltage (input-COM)	36 VDC
---------------------	--------

### ENVIRONMENTAL

Temperature - operating	-10 to +60°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	Nema 4X & 12 with IP65

### POWER SUPPLY

Nominal Input (DC)	12-24VDC
--------------------	----------

### DISPLAY

Display Update Time	0.1 to 999.9 seconds
Scaling Factor	-100 to 1990x10
Number of digits	4
Digit height	12mm [0.47"]
Digit height of annunciator	6mm [0.23"]
Number of message characters	4
Backlight colors	Red, Green, White
LCD display	Positive or Negative

### OUTPUT

Max voltage	34V
Max current	500mA
Analog output	4-20mA


### CERTIFICATION

UL and cUL, CE

### Visibility:

- User adjustable backlight brightness and colour
- Large display
- Wide viewing angle (both horizontal and vertical)
- Custom annunciators


### Dimensions:

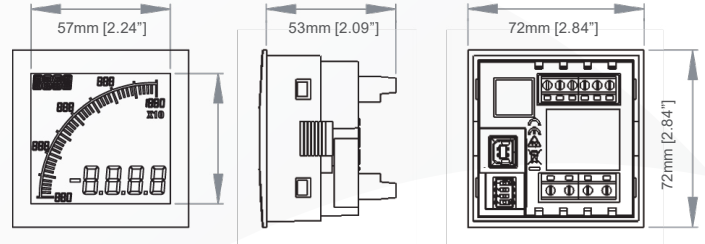

Panel cutout: 68mm x 68mm [2.68" x 2.68"] as per DIN43700/IEC61554

## Easy To Use Software

Just plug into any USB port on your PC, run the freely available APM Configurator application and you're off. No drivers required.

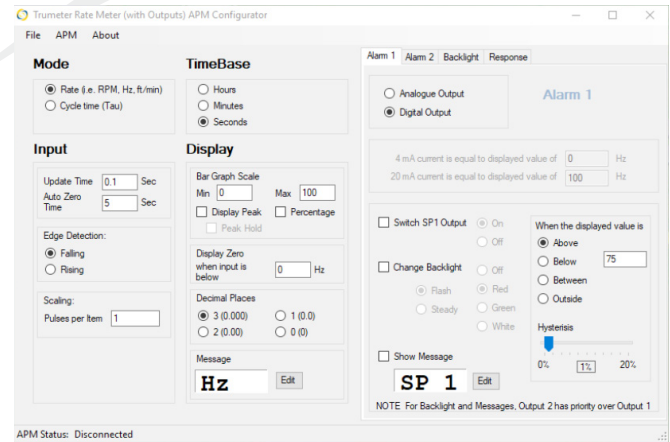

## Part Numbers

Part	Description
APM-RATE-APO	APM RATE METER, POSITIVE LCD WITH OUTPUTS
APM-RATE-ANO	APM RATE METER, NEGATIVE LCD WITH OUTPUTS
022128-01	USB Cable

### By Request: Modbus connectivity

APM-RATE-APS	APM RATE METER, POSITIVE LCD WITH MODBUS
APM-RATE-ANS	APM RATE METER, NEGATIVE LCD WITH MODBUS

Full specifications available online [www.trumeter.com/apm](http://www.trumeter.com/apm)



**Trumeter (The Americas)**  
 6601 Lyons Rd, Suite H-7  
 Coconut Creek, Florida  
 FL 33073,  
 USA  
 Tel: +1 954 725 6699  
 Email: sales.usa@trumeter.com

**Trumeter (Europe)**  
 Pilot Mill  
 Alfred Street  
 Bury,  
 BL9 9EF  
 Tel: +44 161 674 0960  
 Email: sales.uk@trumeter.com

**Innovative Design Technologies Sdn. Bhd**  
 Lot 5881, Lorong Iks Bukit Minyak 1  
 Taman Perindustrian Iks, 14000 Bukit Tengah  
 Penang, Malaysia  
 Web: www.idtworld.com  
 Tel: + 604 5015700  
 Email: sales.my@idtworld.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Panel Meters](#) category:*

*Click to view products by [Trumeter](#) manufacturer:*

Other Similar products are found below :

[70.360.4828.0](#) [72331-00](#) [85310-25](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [20046-20](#) [20182-23](#)  
[AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [20078-20](#) [87166-00](#) [87895-00](#) [28000-03](#) [82322K-11](#) [20125-](#)  
[21](#) [86640-00](#) [2CSM310060R1001](#) [2CMA100180R1000](#) [2CMA100183R1000](#) [2CMA103572R1000](#) [F451730](#) [F452710](#) [LE-03M-CT](#) [50626](#)  
[50900](#) [DMA-3-CT](#) [50628](#) [APM-RATE-APO](#) [50899](#) [50629](#) [039-40202-0100-10/20A-0-10/20A](#) [039-40135-0000-0-20MA](#) [039-40125-0060-0-](#)  
[60MV-0-60A](#) [039-40125-0100-0-60MV-0-100A](#) [039-40125-0200-0-60MV-0-200A](#) [039-40125-2000-0-60MV-0-2000A](#) [039-70135-0000-0-](#)  
[20MA](#) [039-70123-0050-5A-0-5A](#) [039-70123-0250-25A-0-25A](#) [039-70123-0400-40A-0-40A](#) [039-70125-0100-0-60MV-0-100A](#) [039-70125-](#)  
[0150-0-60MV-0-150A](#)