

# Model 6180 Series

## Precision Potentiometer / Position Sensor



### Features:

- Lead-free
- RoHS 2 compliant
- 7/8" diameter
- Single turn
- Conductive plastic

### Applications:

- Pedal position
- Joystick controls
- Valve control
- Wind vane
- Panel control
- Test and measurement
- Medical equipment
- Angular position

## Model Styles Available

6181	1/8" shaft, 1/4" bushing
6184	6 mm shaft, 3/8" bushing
6186	1/8" shaft, 3/8" bushing
6187	1/4" shaft, 3/8" bushing
6188 for side load applications	1/4" shaft, 3/8" bronze bushing

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies  
413 Rood RD, Suite 7  
Calexico, CA 92231  
Ph: +1 714 447 2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

# Model 6180 Series

## Precision Potentiometer / Position Sensor



### Electrical

Resistance range	1K to 100K Ohms
Standard resistance tolerance	±10%
Minimum practical resistance tolerance	±5%
Independent linearity	±1%
Minimum practical independent linearity	±0.5%
Input voltage	400 VDC maximum, not to exceed power rating
Power rating	1.0 Watt at 70°C, derating to 0 at 125°C
Dielectric strength	750 V rms
Insulation resistance	1,000 Megohms minimum
Output smoothness	0.1% maximum
Actual electrical travel	340°C nominal (300° with stop feature)
Electrical continuity travel	350°C nominal (320°C with stop feature)
End voltage	Maximum 0.5% of input voltage
Resolution	Essentially infinite
Temperature coefficient of resistance	-400 ppm/°C typical
Temperature coefficient of output voltage	±10 ppm/°C typical

### Mechanical

Total mechanical travel	360° continuous (320° ±3° with stop feature)
Number of gangs	1 maximum
Weight	0.53 oz. nominal (single gang)
Backlash	1° maximum
Static stop strength	40 oz.-in.
Panel nut tightening torque	25 lb.-in. maximum
Start/run torque	1.0 oz.-in.

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies  
413 Rood RD, Suite 7  
Calexico, CA 92231  
Ph: +1 714 447 2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

# Model 6180 Series


## Precision Potentiometer / Position Sensor



### Environmental (MIL-PRF-39023)

Operating temperature range	-40°C to +125°C dynamic, -65°C to +125°C static
Temperature cycling	5 cycles, -65°C to +125°C, maximum 10% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	10 G's, 10 to 500 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity
Moisture resistance	Five 24 hour cycles, maximum 25% ΔR
High temperature exposure	1,000 hours at 125°C, maximum 0.5% ΔV <sub>R</sub>
Rotational life	5 million shaft revolutions (no sideload, 6188 up to 8 oz. sideload)
Rotational load life	5 million shaft revolutions, maximum 10% ΔR
Ingress protection rating (IP code)	IP50, IP66 available as option (feature code ES)

### Ordering Information

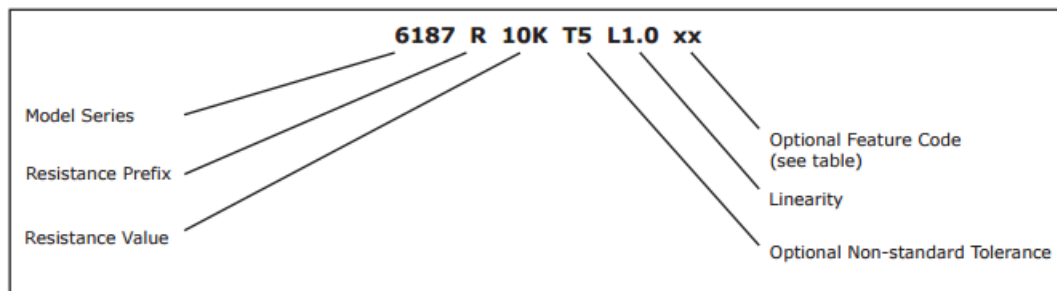

### Feature Codes

Center tap	CT
Linearity tape	LT
Shaft lock, 6187 only	SL
Stop	ST
Seal (IP66) 6184, 6187, or 6188 only	ES

When multiple feature codes are used, the P/N shall be in the same sequence as listed in this table (top to bottom).

General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc


TT Electronics | BI Technologies  
413 Rood RD, Suite 7  
Calexico, CA 92231  
Ph: +1 714 447 2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

# Model 6180 Series

## Precision Potentiometer / Position Sensor




### Circuit Diagram

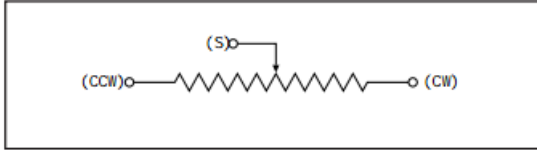

### Standard Resistance Values

1K	2K	5K	10K	20K	50K
----	----	----	-----	-----	-----

### Outline Drawing

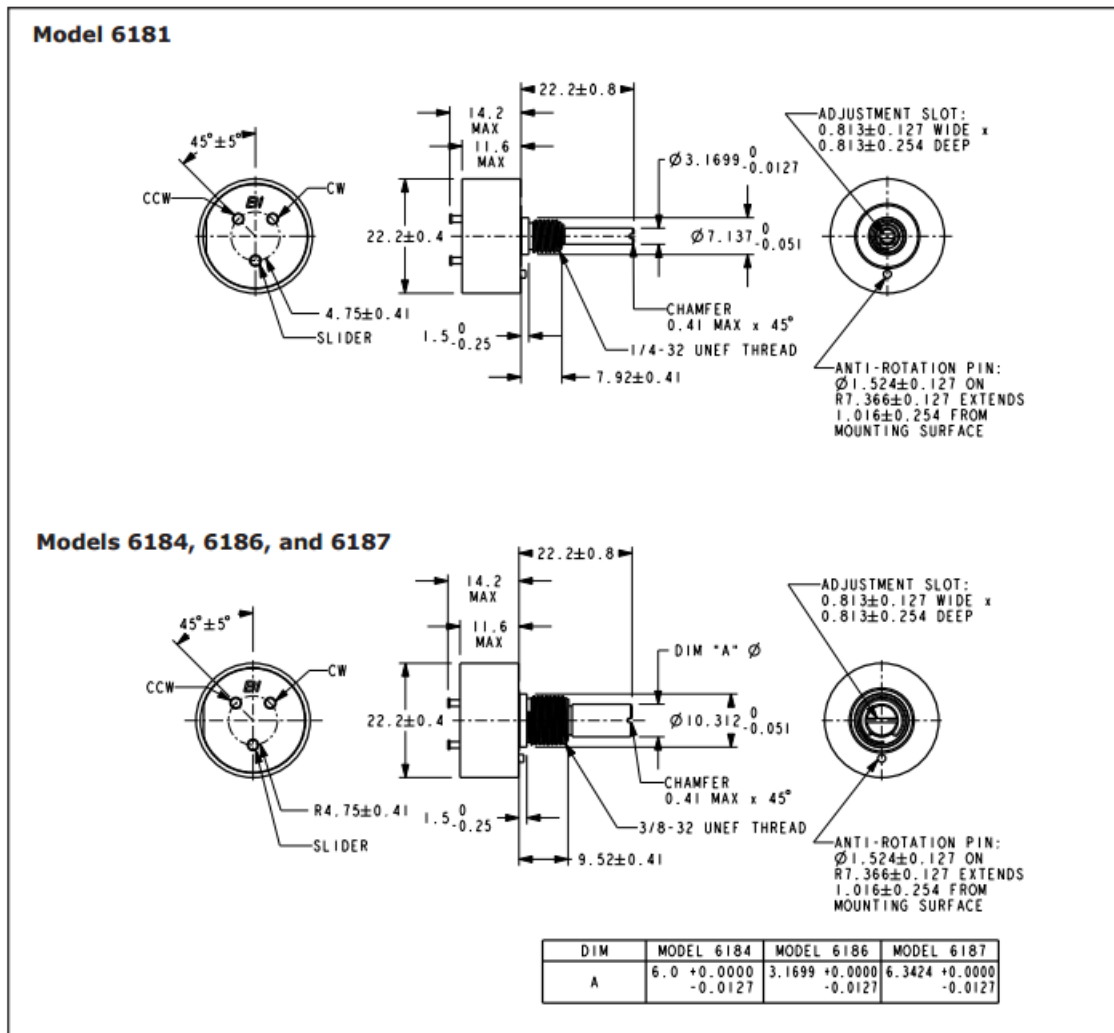

Dimensions in mm

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies

413 Rood RD, Suite 7

Calexico, CA 92231

Ph: +1 714 447 2345

www.ttelectronics.com/bi-technologies

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Potentiometers](#) category:*

*Click to view products by [TT Electronics](#) manufacturer:*

Other Similar products are found below :

[58C2-2](#) [590SX1N32F103SS](#) [591SXJ48S252SC](#) [591SXP56S252SC](#) [591SXP56S503SC](#) [D31409](#) [70B1G048K502X-A](#) [70B1M032S502W](#)  
[70B1N056S202W](#) [70B8N056F502W](#) [70J8N048S104U](#) [70L1N040P103W](#) [70L1N048P103X](#) [70L1N048S103W](#) [GA2L040S102UC](#)  
[GA2L040S103UC](#) [GS1G044P103UA](#) [GS1N048P103UA](#) [GS1T032S103UA](#) [A43-1500](#) [A43-20K](#) [A47-200K](#) [A4720K](#) [RA20LASD251A](#)  
[132-2-0-202](#) [132-0-0-202](#) [RK14K1220-F25-C0-A103](#) [RK14K1220F25C0C104](#) [RK14K1220-F25-C1-B103](#) [14910FAGJSX10102KA](#)  
[14910FBGLFY00103KA](#) [14910AABHSX10103KA](#) [14910FAGJSX10104KA](#) [152-01031](#) [C0342008 5K](#) [P270-109A](#) [J97589](#) [23M728](#)  
[248BBHS0XB25104MA](#) [RV170F-10-15R1-B500K-0021](#) [RV8NAYSB104A](#) [917523A](#) [A43-40](#) [A43-750](#) [A43S-5](#) [A47-15K](#) [A4750K](#)  
[SPPG048S103U](#) [SPPG056P103U](#) [SWE-10](#)