



Power Inductors

Model HA72L-0530 series


Features:

- Operating Temperature Range -55°C to $+155^{\circ}\text{C}$
- Ambient Temperature, Maximum $+115^{\circ}\text{C}$
- Temperature Rise, 40°C
- RoHS Compliant
- AEC-Q200 Certified



 All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Schematic

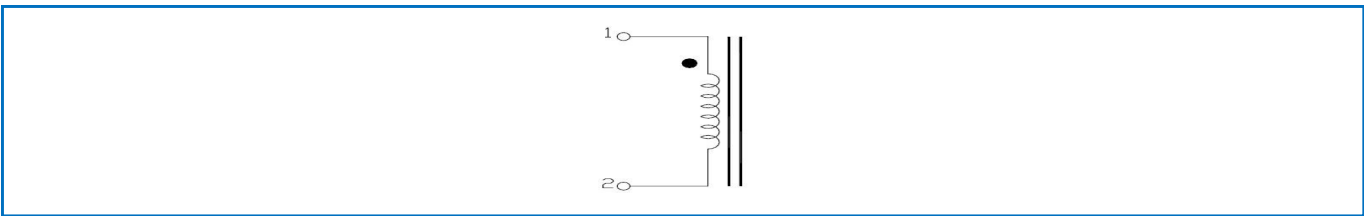

Specifications @ 25°C

Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ	DCR (m Ω) Max	I _{rms} (A)	Isat (A)	Part Number	Inductance ($\mu\text{H} \pm 20\%$ @0A)	DCR (m Ω) Typ.	DCR (m Ω) Max	I _{rms} (A)	Isat (A)
HA72L-0530R20LFTR	0.20	3.5	3.9	18.0	14.5	HA72L-05302R2LFTR	2.20	25.0	29.0	5.5	7.5
HA72L-0530R47LFTR	0.47	7.4	8.5	13.5	12.0	HA72L-05303R3LFTR	3.30	32.0	38.0	5.0	6.0
HA72L-0530R68LFTR	0.68	11.0	12.0	8.5	14.0	HA72L-05304R7LFTR	4.70	50.0	60.0	3.5	5.0
HA72L-05301R0LFTR	1.00	13.0	14.0	7.0	11.0	HA72L-05306R8LFTR	6.80	75.0	90.0	3.0	4.0
HA72L-05301R2LFTR	1.20	15.0	16.0	6.5	11.0	HA72L-0530100LFTR	10.0	110	125	2.5	3.5
HA72L-05301R5LFTR	1.50	20.0	25.0	6.0	8.5						

- Notes: (1) Isat is the saturation current at which inductance rolls off approximately 30% from its initial (zero DC)
- (2) I_{rms} is the approximate current at which $\Delta T = 40^{\circ}\text{C}$
- (3) Operating Temperature Range -55°C to $+155^{\circ}\text{C}$
- (4) Test condition for all case sizes is 100kHz @ 1V









General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Power Inductor

Model HA72L-0530 series

Electrical Characteristics @ 25°C

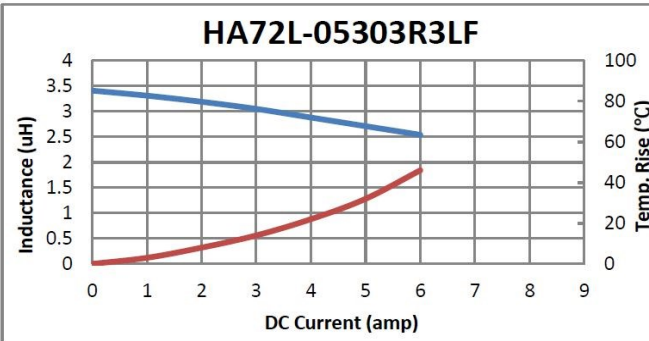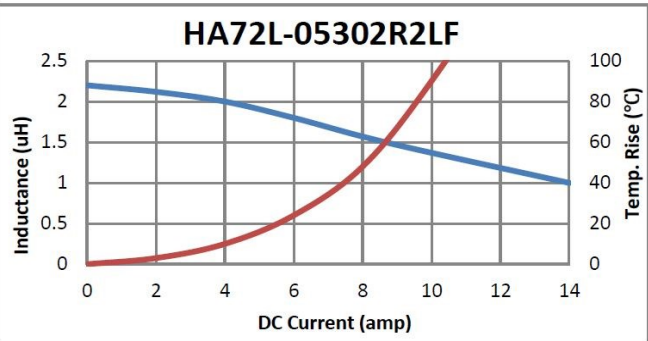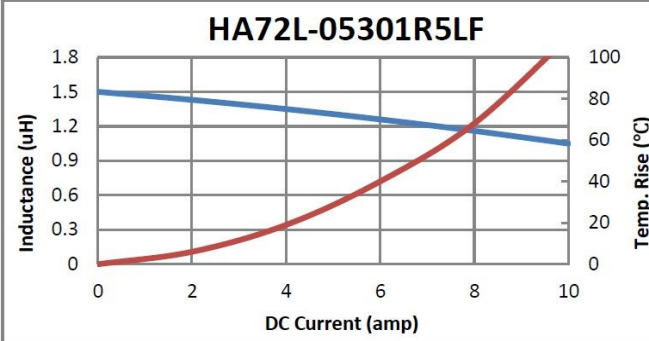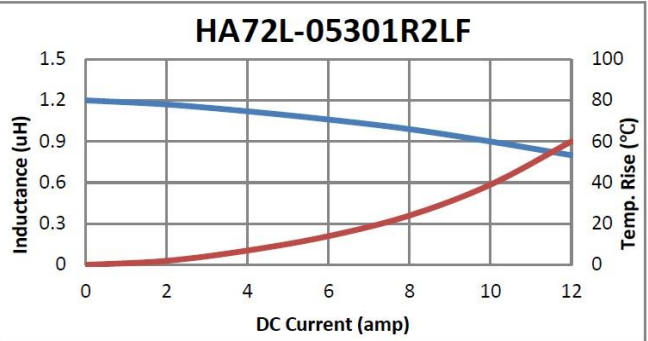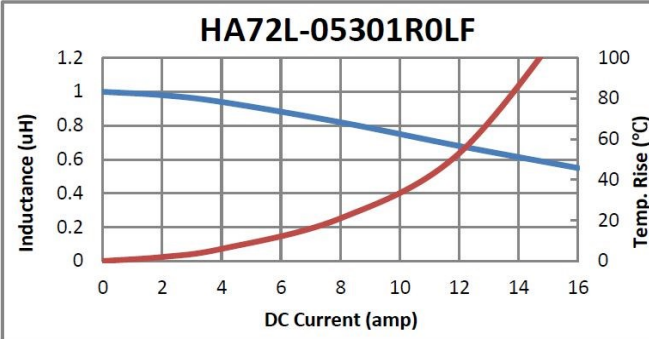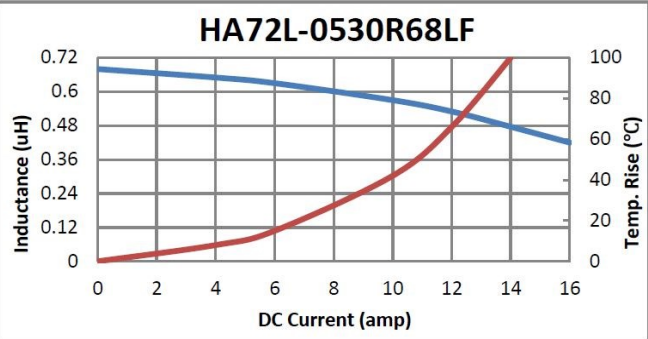
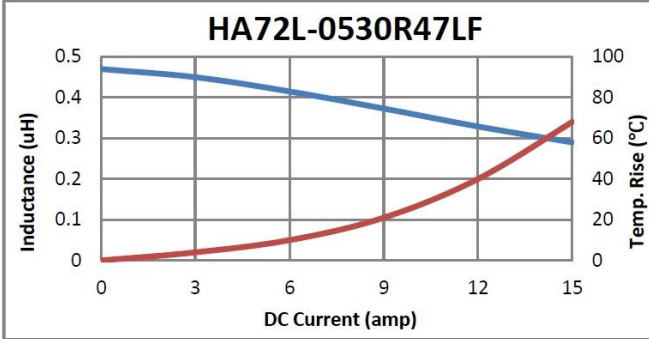
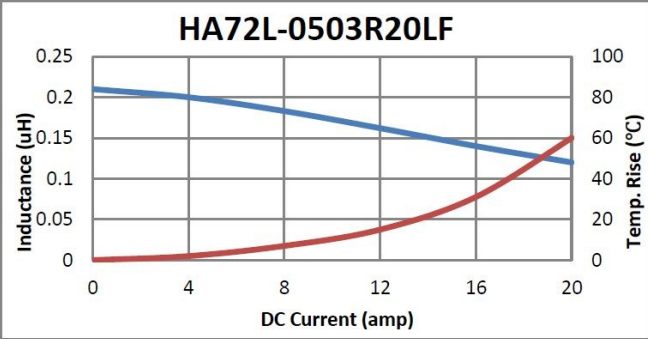


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Power Inductor

Model HA72L-0530 series

Electrical Specifications @ 25°C

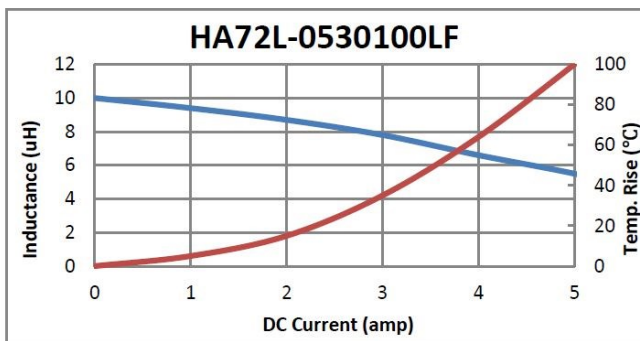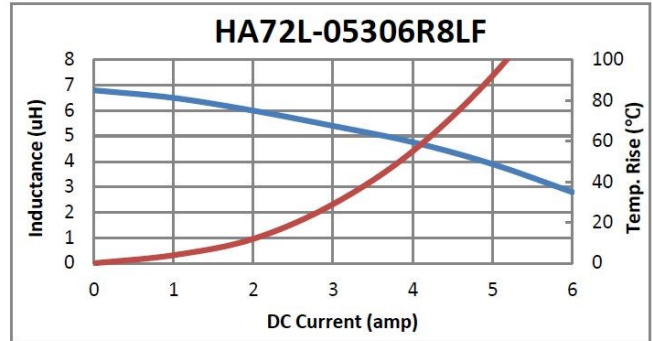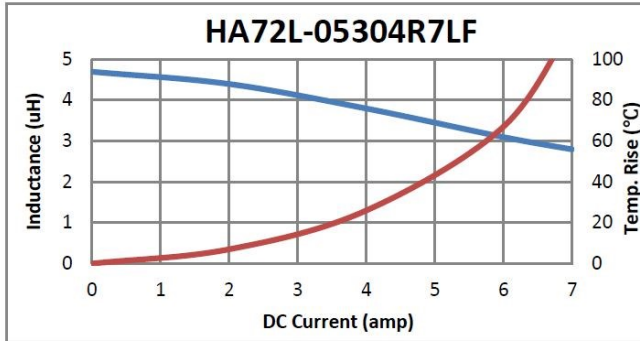

Outline dimensions (mm)

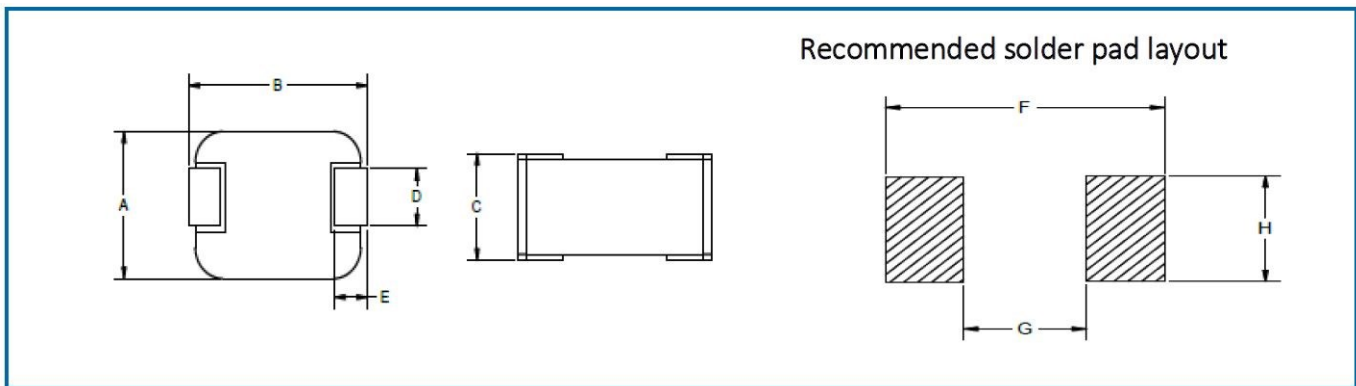

CASE SIZE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)
0530 series	5.20 ± 0.3	5.40 ± 0.3	3	2.2 ± 0.3	1.2 ± 0.2	5.99	2.20	2.50

Power Inductor


Model HA72L-0530 series



Packaging

Standard:	Embossed Tape and Reel			
	Reel:	Diameter	All case size	= 13" (330mm)
		Capacity	Case size 0530	= 2,000 units

Ordering Information

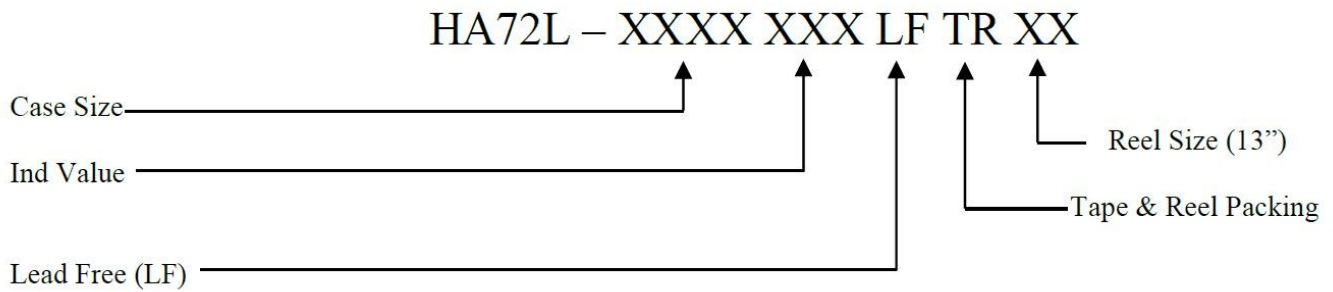

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [TT Electronics](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)