Panel Potentiometer

Model P090 Series

Features:

- 9 mm rotary
- Insulated shaft
- Conductive plastic element
- 100,000 cycle life
- Snap-in clip

•







Model Styles Available

Side Adjust	P090L
Top Adjust	P090S

Electrical

Resistance Range, Ohms	500 – 1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.03W
Dielectric Strength	250Vac, I minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Actual Electrical Travel, Nominal	240°

Mechanical

Total Mechanical Travel	280°C ± 10°
Static Stop Strength	40 oz-in
Rotational torque	0.13 to 1.25 oz-in
Detent torque	.41 to 1.6 oz-in

Environmental


Operating Temperature Range	-20°C to +70°C
Rotational Life	100,000 cycles

Panel Potentiometer


Model P090 Series



Ordering

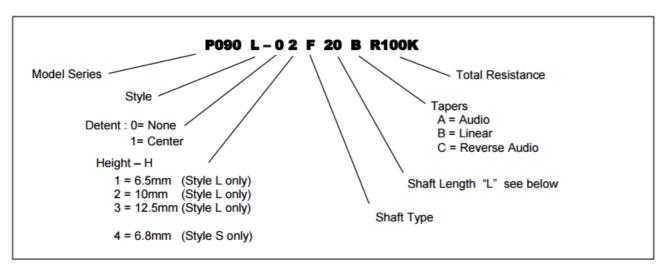


Shaft Type

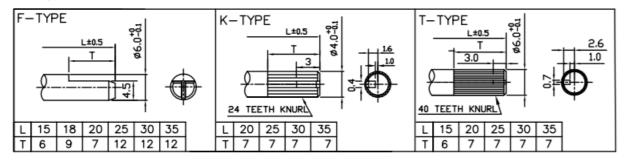



CIRCUIT DIAGRAM




Panel Potentiometer


Model P090 Series




Model P090L (Side Adjust)

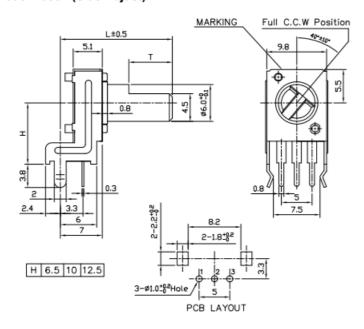

Model P090S (Top Adjust)

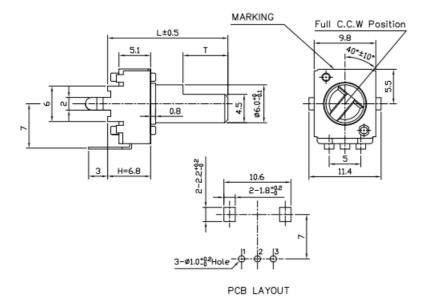



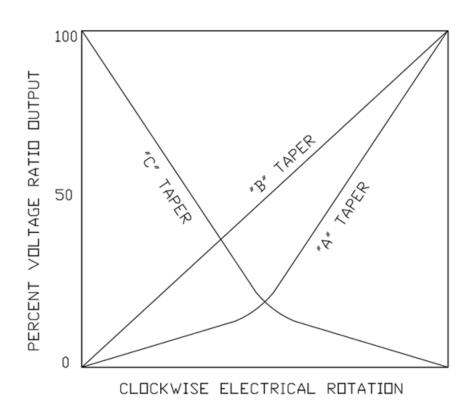

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Trimmer Resistors - SMD category:

Click to view products by TT Electronics manufacturer:

Other Similar products are found below:

EVM-1DSX30BQ2 3204X101P 3213X105M 45WR100LFT7 TS3YJ101MR15 TS3YJ102MR15 TS3YJ104MR15 TS4YJ103MR10
TS4YL103MR10 TS4YL502MR10 TS4YL503MR10 3213X503M 3214G-1-202E 43WR5KLFTR 5712-305-403E17 TS3YJ201MR15
TS3YJ202MR15 TS3YJ203MR15 TS3YJ501MR15 TS3YJ502MR15 TS3YJ503MR15 TS4YL203MR10 TS3YJ103MR15 TS4YL102MR10
TS4YJ502MR10 P160KNPD-0QC30B10K 23SR50KLFTR 43WR100KLFTR 3130W203P 072084A PVG5A102C03R00
PVG5A203C03R00 3214G-1-100E 3214G-1-102E 3214G-1-204E 3214G-1-501E 3214G-1-503E 35WR5KLFTR EVM-1SSX50B15 EVM-2XSX50B25 EVM-31GA00B12 EVM-7JSX30BQ5 EVM-7JSX30BY3 EVM-7JSX30BY5 1-1879029-3 3214G-1-103E 3214G-1-502E
35WR10KLFTR 35WR1KLFTR CA6XVSMD-100KA2525