
Model PSxxM / PSxxL

Features:

- Molded element
- 100,000 cycle life
- Metal or plastic shaft options
- With/without LED illumination
- With/without dust cover
- RoHS compliant



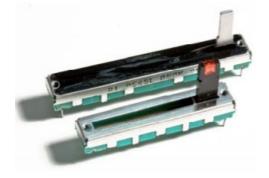

Model Styles Available							
Dual Gang Without LED	PSxxM						
Single Gang With LED	PSxxL						
Electrical							
Resistance Range, Ohms	500 -1M						
Standard Resistance Tolerance	± 20%						
Resistance Tapers	A,B,C						
Residual Resistance	Terminals 1 to 2:Less than 10 ohms Terminals 2 to 3:Less than 30 ohms						
Input Voltage, Maximum	Linear B taper: 200 Vac Other tapers: 150 Vac						
Power rating, Watts (Single Unit / Dual Unit)	Linear B taper: 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W 45mm: 0.25W / 0.125W, 60mm:0.2W / 0.2W						
	Other tapers: 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm:0.1W / 0.1W						
Dielectric Strength	300Vac, 1 minute						
Insulation Resistance, Minimum	10M ohms at 250Vdc/ 1 minute						
Sliding Noise	Less than 100mV						
Gang Error	±3dB (-40dB to 0dB)						
	Mechanical						
Static Stop Strength, Minimum	5.0 Kgf/cm						
Operating Force	10gf to 100gf						
Detent Slip-out force	30gf to 200gf						
	Durability						
Sliding Life	100,000 cycles						

Model Styles Available

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Model PSxxM / PSxxL




Ordering

Model PSxxM (Without LED)

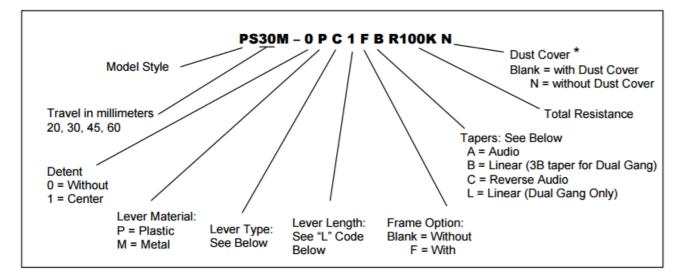

Model PSxxL (With LED)

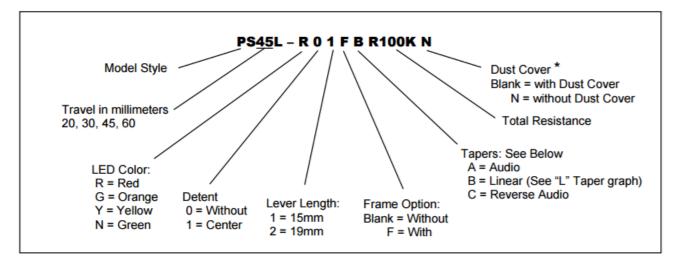



General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies

Model PSxxM / PSxxL



Tapers For Dual Gang units ONLY, the Standard Taper is a 3B taper If Linear Taper is desired, use "L" taper option

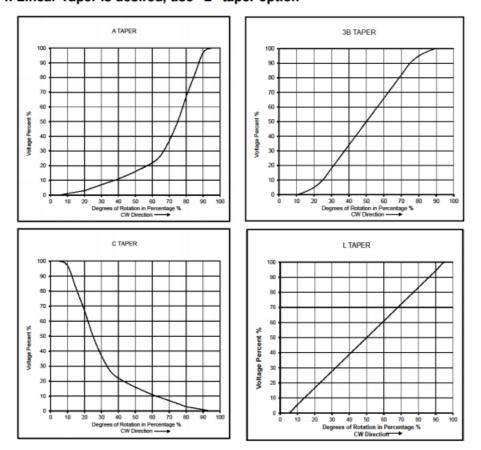

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | Bl Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies

Model PSxxM / PSxxL




Outline Drawings

Plastic Lever Types (For PSxxM Only)

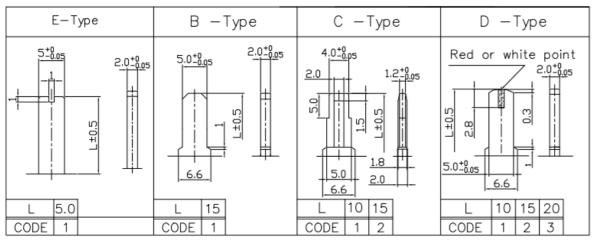

Dust Cover option not offered for levers less than 10 mm in length

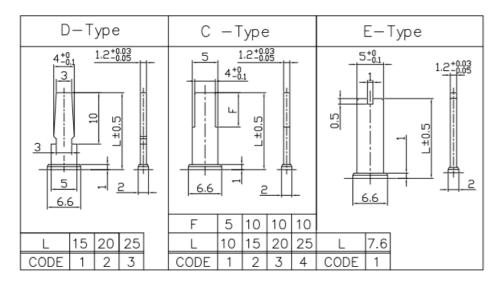

Metal Lever Types (For PSxxM Only)

* Dust Cover option not offered for levers less than 10 mm in length

General Note TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print. TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies


Model PSxxM / PSxxL



Outline Drawings

Model PSxxM (Without LED)


With Dust Cover

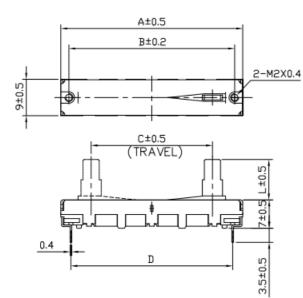


F

G D

FRAME OPTION (F)






ω

ΩĴ

Without Dust Cover

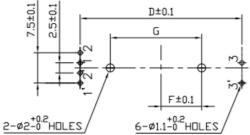

FOR FRAME OPTION ONLY

For PSxxM and PSxxL

MODEL		Α	В	С	D	F	G
PS20M	PS20L	35	31	20	30	5	12.5
PS30M	PS30L	45	41	30	40	10	22.5
PS45M	PS45L	60	56	45	55	15	32.5
PS60M	PS60L	75	71	60	70	22.5	47.5

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies

Model PSxxM / PSxxL





Outline Drawings


Model PSxxL (With LED)


With Dust Cover

Without Dust Cover

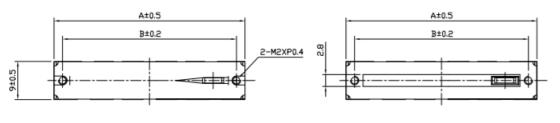

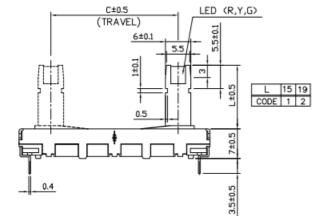








FRAME OPTION (F)

PSxxL (Single gang with LED)





PSxxM (Dual gang)



TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Potentiometers category:

Click to view products by TT Electronics manufacturer:

Other Similar products are found below :

 M22
 SS-4928
 RSA0K11A901L
 RA6020F-10-20D1-B50K
 RA4520F-10-20D1-B50K
 X22205CAAF
 RSA0N11B9A03
 448XC2103BDN

 K22208EAAG
 PS15-10PC1BR10K
 3048L-2-503
 MFP 211-N
 CDE23N-60-B10K
 CDE23N-60-B1K
 CDE23N-60-B50K
 1825160-1

 1825161-2
 1825257-1
 1825259-2
 1825261-2
 PS100-2B1AR10K
 1825255-5
 PTA6044-2015CPB103
 PTA6044-2015CPB104
 PTA6044

 2015CPA103
 PTA6044-2015CPA104
 PS100-1B1BR10K
 PTA3044-2015CPB504
 RS15H113CA05
 PS20-10PC1BR10K
 RS08U11AZ001

 RA4520F-10-20D1-B1K
 PTL30-15R0-104B2
 PTE60-202B-102B2
 PTA6044-2015DPB103
 RA6020F-10-20D1-B100K
 RA6020F-10-15F2

 B2K
 RA4543F-20-15D1-B10K-01
 RA3043F-20-10EB1-A100K
 RA6043F-20-10EB1-A5K
 RA6020F-10-20D1-B250K
 RA6020F-10-15F2

 B5K
 RA6020F-10-15F2-B1K
 RA00B1MF-10-08T1-JISB10K-016
 RA60K1F-10-13D1-B100K-011
 RA3043F-20-10EB1-A50K
 RA4520F

 10-20D1-B5K
 SX254
 CDE23N-60-B5K
 CDE91N-60-B100K
 RA60X1F-10-13D1-B100K-011
 RA3043F-20-10EB1-A50K
 RA4520F