Slide Potentiometer

Model PSxxM / PSxxL

Electronics

Features:

- Molded element
- 100,000 cycle life
- Metal or plastic shaft options
- With/without LED illumination
- With/without dust cover
- RoHS compliant

Dual Gang Without LED

Single Gang With LED



model otyles Available	
	PSxxM
	PSxxL

Resistance Range, Ohms 500 -1M Standard Resistance Tolerance ± 20% Resistance Tapers A.B.C.

Electrical

Model Styles Available

Residual Resistance	Terminals 1 to 2:Less than 10 ohms
	Terminals 2 to 3:Less than 30 ohms

Input Voltage, Maximum	Linear B taper: 200 Vac	Other tapers: 150 Vac

Power rating, Watts (Single Unit / Dual Unit)

Linear B taper: 20mm: 0.1W / 0.05W, 30mm: 0.2W / 0.1W / 45mm: 0.25W / 0.125W, 60mm: 0.2W / 0.2W

Other tapers: 20mm: 0.05W / 0.025W, 30mm: 0.1W / 0.05W 45mm: 0.125W / 0.06W, 60mm:0.1W / 0.1W

Dielectric Strength300Vac, 1 minuteInsulation Resistance, Minimum10M ohms at 250Vdc/ 1 minuteSliding NoiseLess than 100mVGang Error±3dB (-40dB to 0dB)

Mechanical

Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	10gf to 100gf
Detent Slip-out force	30gf to 200gf

Durability

Sliding Life 100,000 cycles


Slide Potentiometer

Model PSxxM / PSxxL




Ordering

Model PSxxM (Without LED)

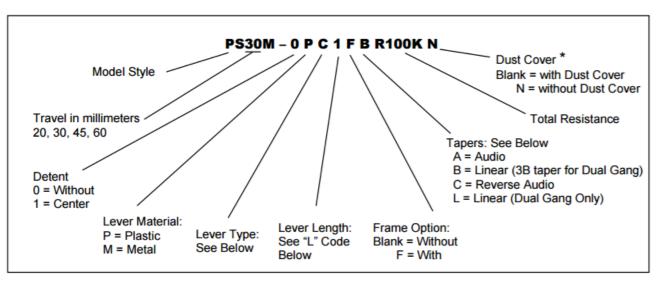

Model PSxxL (With LED)

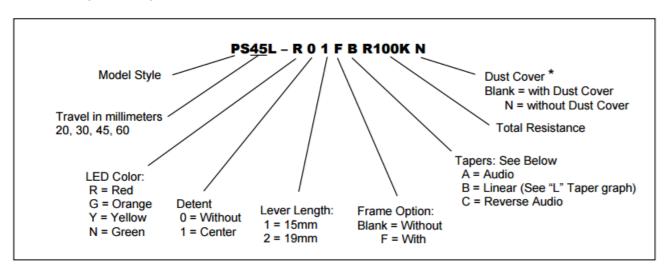


Standard Resistance Values, ohms


500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1 MEG	500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1 MEG
---	-----	----	----	----	-----	-----	-----	------	------	------	-------


Model PSxxM / PSxxL




Tapers
For Dual Gang units ONLY, the Standard Taper is a 3B taper
If Linear Taper is desired, use "L" taper option










Model PSxxM / PSxxL




Outline Drawings

Plastic Lever Types (For PSxxM Only)

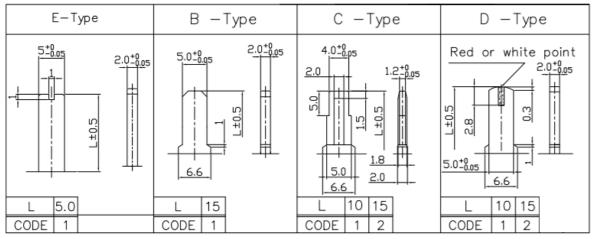

Dust Cover option not offered for levers less than 10 mm in length

Metal Lever Types (For PSxxM Only)



^{*} Dust Cover option not offered for levers less than 10 mm in length

Model PSxxM / PSxxL




Outline Drawings


Model PSxxM (Without LED)


With Dust Cover


A±0.5 B±0.2 2-M2X0.4




Without Dust Cover









For PSxxM and PSxxL

MODEL		Α	В	С	D	F	G
PS20M	PS20L	35	31	20	30	5	12.5
PS30M	PS30L	45	41	30	40	10	22.5
PS45M	PS45L	60	56	45	55	15	32.5
PS60M	PS60L	75	71	60	70	22.5	47.5

Slide Potentiometer

Model PSxxM / PSxxL




Outline Drawings


Model PSxxL (With LED)

With Dust Cover


Without Dust Cover

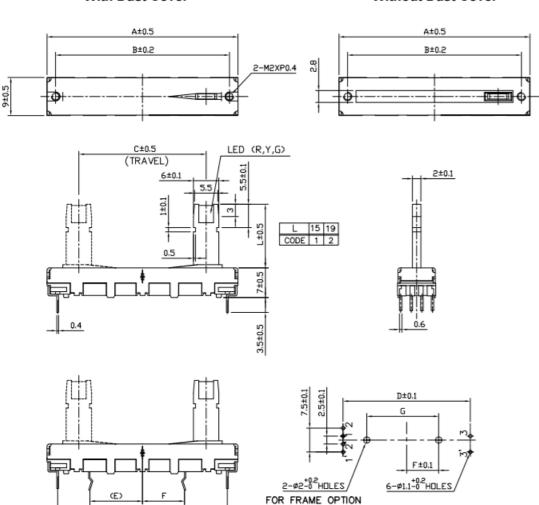


ONLY



FRAME OPTION (F)



PSxxM (Dual gang)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Potentiometers category:

Click to view products by TT Electronics manufacturer:

Other Similar products are found below:

M22 SS-4928 RSA0K11A901L RA6020F-10-20D1-B50K RA4520F-10-20D1-B50K X22205CAAF RSA0N11B9A03 448XC2103BDN K22208EAAG PS15-10PC1BR10K 3048L-2-503 MFP 211-N CDE23N-60-B10K CDE23N-60-B1K CDE23N-60-B50K 1825160-1 1825161-2 1825257-1 1825259-2 1825261-2 X22205AAAL PS100-2B1AR10K 1825255-5 PTA6044-2015CPB103 PTA6044-2015CPB104 PTA6044-2015CPA103 PTA6044-2015CPA104 PS100-1B1BR10K PTA3044-2015CPB504 RS15H113CA05 PS20-10PC1BR10K RS08U11AZ001 RA4520F-10-20D1-B1K PTL30-15R0-104B2 PTE60-202B-102B2 PTA6044-2015DPB103 RA6020F-10-20D1-B100K RA6020F-10-15F2-B2K RA4543F-20-15D1-B10K-01 RA3043F-20-10EB1-A100K RA6043F-20-10EB1-A5K RA6020F-10-20D1-B250K RA6020F-10-15F2-B5K RA6020F-10-15F2-B1K RA00B1MF-10-08T1-JISB10K-016 RA60K1F-10-13D1-B100K-011 RA3043F-20-10EB1-A50K RA4520F-10-20D1-B5K SX254 CDE23N-60-B5K