

## DESCRIPTION

The PUP96N3/PUP120N3 series of AC/DC switching power supplies are for 96-120 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an inlet of the IEC320/C14 or IEC320/C6 to mate with interchangeable cord for world-wide use. All models meet EN55032 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

## PUP96N3/PUP120N3 SERIES

CE  
RoHS



## FEATURES

- No load power consumption less than 0.15 W
- Compliant with DoE level VI requirements
- Meet Energy Star EPS2.0 /ErP EC No 278/2009 (Lot 7)
- Meet EU CoC EPS V5 Tier 2
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency  $\geq 89\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

## SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1  
File No. E190414



TUV EN 62368-1

## INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.3 A (rms) for 115 VAC 0.7 A (rms) for 230 VAC
Earth Leakage current:	250 $\mu$ A max. @ 264 VAC, 60 Hz

## OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	350 mV peak to peak maximum
Overvoltage protection:	Set at 125-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions (auto-recovery)
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 $\mu$ s after a 25% step load change

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Operating humidity:	20% to 80% non-condensing
Storage humidity:	10% to 90% non-condensing

## GENERAL SPECIFICATIONS

Hold-up time:	10 ms minimum at 100 VAC
Turn on delay time:	3 s maximum at 100 VAC
Power factor:	0.95 typical
Efficiency:	89% minimum at 110 VAC or 240 VAC.
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	100 A @ 115 Vac or 200 A @ 230 Vac at 25 $^{\circ}$ C cold start
Withstand voltage:	4242 VDC from input to output 2500 VDC from input to ground
MTBF:	200,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332

## EMC Performance

EN55032:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, $\pm 8$ KV air and $\pm 4$ KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, $\pm 1$ KV
EN61000-4-5:	Surge, $\pm 1$ KV diff., $\pm 2$ KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms


## OUTPUT VOLTAGE/CURRENT RATING CHART

Model <sup>(1)</sup>	Output						Average Active efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise <sup>(2)</sup>	Max. Power	
PUP96N3-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 / 90%
PUP96N3S-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 / 90%
PUP120N3-12	12 V	0 A	10.00 A	±5%	350 mV	120 W	89 / 90%
PUP120N3S-12	12 V	0 A	10.00 A	±5%	350 mV	120 W	89 / 90%
PUP120N3-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	89 / 91%
PUP120N3S-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	89 / 91%
PUP120N3-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	89 / 91%
PUP120N3S-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	89 / 91%
PUP120N3-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	89 / 91%
PUP120N3S-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	89 / 91%

### NOTES:

- PUP120N3 models are equipped with IEC320/C14 inlet, and PUP120N3S models are equipped with IEC320/C6 inlet.
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATIONS

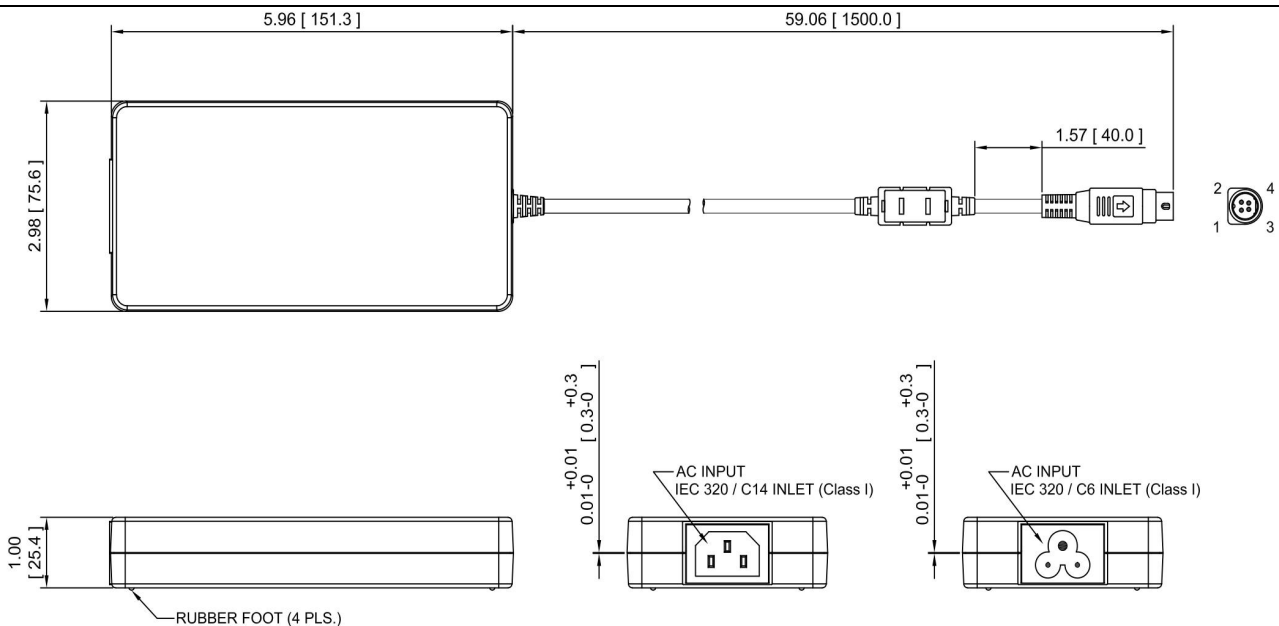

### NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 417 grams (0.92 lbs.) approx.
- V1 return (-) is electrically connected to incoming Earth Ground through a 1M ohm resistor as standard.

## PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return	V1 Return	V1 Return

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Desktop AC Adapters](#) category:*

*Click to view products by [TT Electronics](#) manufacturer:*

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [CENB1040A1245F02](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [MEA-045AA2C K-A](#) [PCM50UT04](#) [PCM50UT05](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#) [ME30A4803F01](#) [ME40A1203N01](#) [ME40A2403N01](#) [MENT1150A2451F01](#)