


MHP TO-220 Series Power Resistor



MHP Series

- TO-220 housing
- Low inductance (<50nH)
- Available in 20W, 35W, or 50W
- High stability film resistance elements
- RoHS compliant
- Approved to DSCC drawings 07017 and 07018

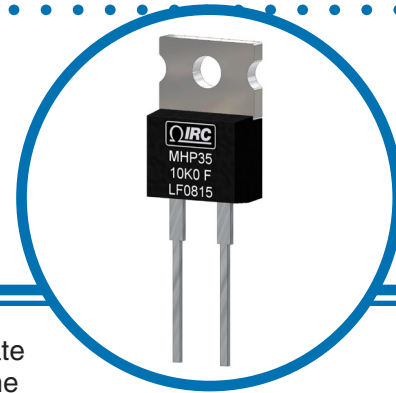

IRC's MHP series resistors satisfy demanding applications for accurate and stable power resistors housed in the convenient TO-220 case. The resistance element is isolated from the mounting tab by an alumina ceramic layer, providing very low thermal resistance and ensuring high insulation resistance between terminals and tab. The non-inductive design makes these products especially useful in high frequency and high speed pulse applications.

Electrical Data

Type	Power Rating ¹		Voltage Rating ⁴	Thermal Resistance	Resistance Range		Tolerances	Nominal Resistance	Typ. Temperature Coefficient ⁵
	Heatsink ²	Free Air ³			Min	Max			
MHP-20	20W	2.25W	500V	5.9°C/W	0.01Ω	0.09Ω	±5%	E6	±250 ppm/°C
					0.1Ω	9.1Ω	±1%, ±5%	E24	±150 ppm/°C
					10Ω	51KΩ	±1%, ±5%	E24	±50 ppm/°C
MHP-35	35W	2.25W	500V	3.3°C/W	0.01Ω	0.09Ω	±5%	E6	±250 ppm/°C
					0.1Ω	9.1Ω	±1%, ±5%	E24	±150 ppm/°C
					10Ω	51KΩ	±1%, ±5%	E24	±50 ppm/°C
MHP-50	50W	2.25W	500V	2.3°C/W	0.01Ω	0.09Ω	±5%	E6	±250 ppm/°C
					0.1Ω	9.1Ω	±1%, ±5%	E24	±150 ppm/°C
					10Ω	51KΩ	±1%, ±5%	E24	±50 ppm/°C

¹Maximum current 25 amps


²Power rating based on 25°C tab temperature

³Power rating based on 25°C ambient temperature


⁴Maximum voltage 500V or $\sqrt{P \times R}$

⁵See TCR Chart for resistance values below 1ohm

Pulse Energy Durability

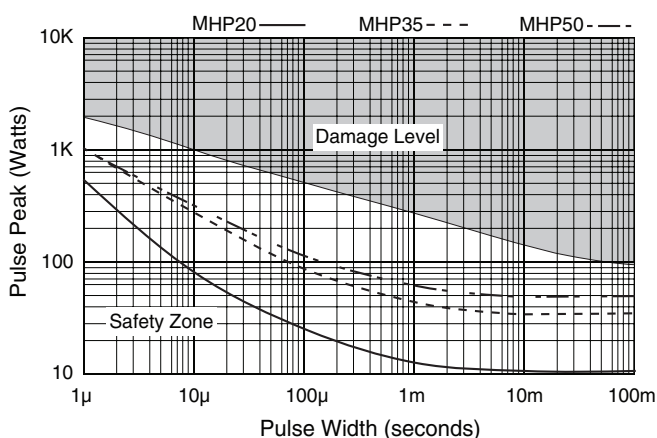

Frequency Characteristics

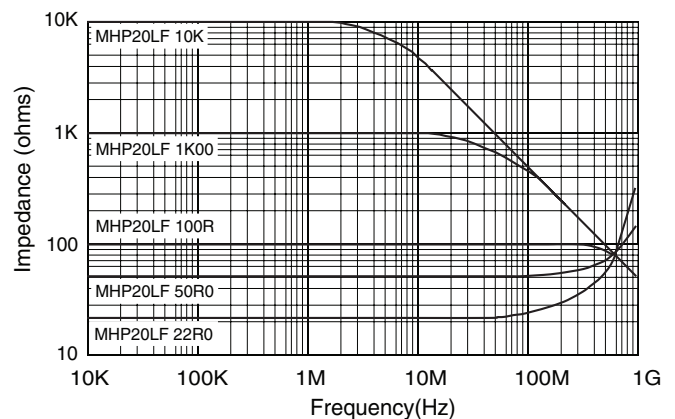

General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

Advanced Film Division • 4222 South Staples Street • Corpus Christi Texas 78411 USA
Telephone: 361 992 7900 • Facsimile: 361 992 3377 • Website: www.ircctt.com



A subsidiary of
TT electronics plc


MHP TO220 Series Issue May 2009

MHP TO-220 Series Power Resistor



Physical Data

		Dim	in (nom)	mm
		A	0.398	10.1 ±0.2
		B	0.590	15.0 ±0.2
		C	0.177	4.5 ±0.2
		ØD	0.142	3.6 ±0.1
		E	0.610	15.5 ±1.0
		F	0.157	4.0 ±0.5
		G	0.118	3 ±0.2
		H	0.108	2.75 ±0.2
		J	0.020	0.5 ±0.05
		K	0.029	0.75 ±0.05
		L	0.059	1.5 ±0.05
		M	0.200	5.08 ±0.1
Lead Material	Tin Plated Copper	N	0.059	1.5 ±0.05
Tab Material	Nickel Plated Copper	P	0.630	16.0 ±0.1

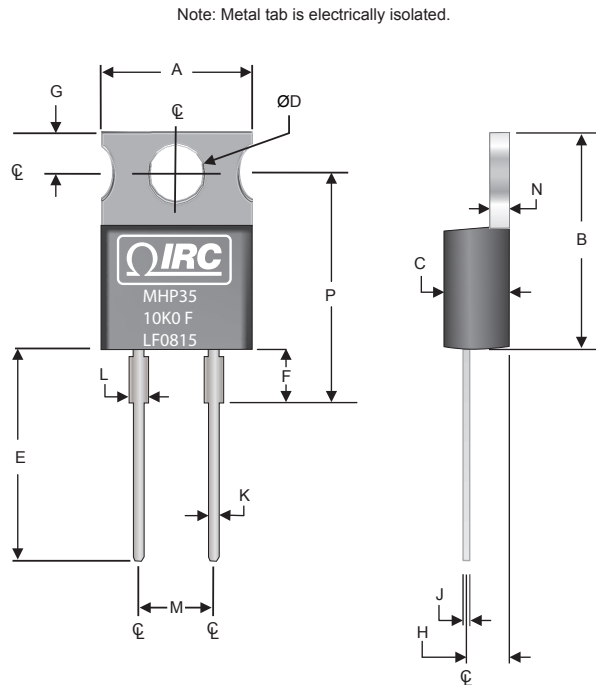

Environmental Data


Test	Method	Specification - Performance
Thermal Shock	MIL-STD-202 Method 107 Condition F	±0.30% + 50mΩ
Moisture Resistance	MIL-STD-202 Method 106	±1.0% + 50mΩ
Vibration	MIL-STD-202 Method 204 Condition D	±0.25% + 50mΩ
Load Life	MIL-STD-202 Method 108 1,000 Hours	±1.0% + 50mΩ
Resistance to Solder Heat	MIL-STD-202 Method 210 Condition B	±0.25% + 50mΩ
Dielectric Withstanding Voltage	MIL-STD-202 Method 301	2200 volts DC or 1500 volts AC; 60 seconds
Insulation Resistance (between terminal and tab)	MIL-STD-202 Method 302	>1000MΩ
Solderability	MIL-STD-202 Method 208	>95% coverage
Operating Temperature Range		-55°C to +155°C

* During soldering, the soldering temperature profile must not cause the metal tab of this device to exceed 220°C.


MHP TO-220 Series Power Resistor




Power Derating Data

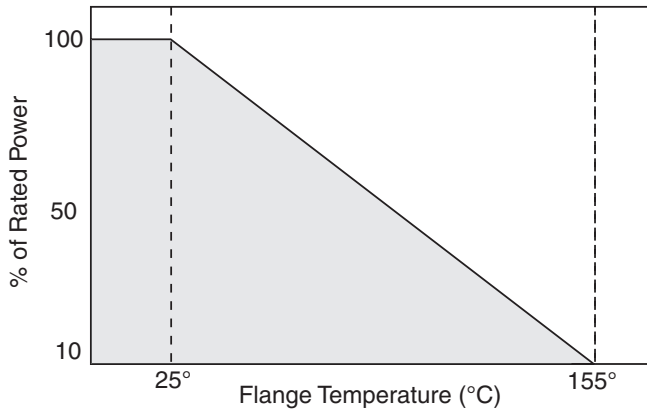

Temperature Rise Data

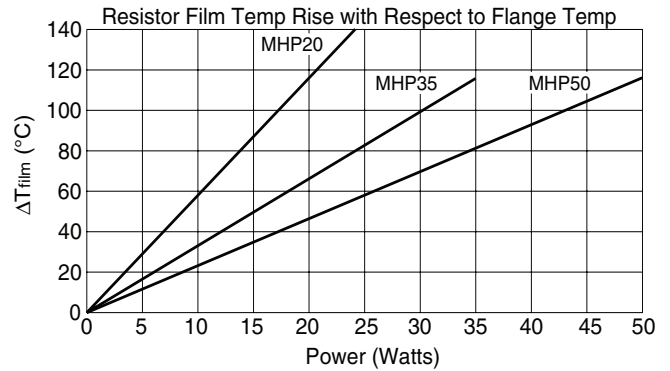

Typical TCR For Low Values

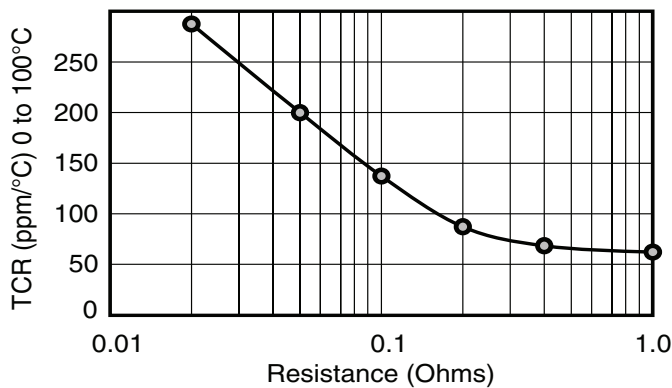

Application Notes:

1. Insulating material is unnecessary between the heat sink and the tab, as the resistor film is isolated by the internal alumina substrate.
2. When mounting with a fastener, thermal grease is recommended.
3. Thermal design should satisfy the following equation: Case Temperature (T_c) + [Thermal Resistance (R_{θJC}) x Power applied (Watts)] ≤ 155°C over the full operating temperature of the application.
4. Resistor film temperature is not to exceed 155°C during operation.
5. This product is RoHS compliant by exemption according to RoHS directive 2002/95/EC exemptions 5 & 7, as they apply to lead in glass and internal solder connections.

Ordering Data

Prefix **TFP** - **MHP20LF** - **1R50** - **J**

Style
MHP20LF = 20W, TO-220 style power resistor
MHP35LF = 35W, TO-220 style power resistor
07017 = DSCC drawing (07017) ver. of above
MHP50LF = 50W, TO-220 style power resistor
07018 = DSCC drawing (07018) ver. of above

Resistance Code
4-digit resistance code.
Ex: 10R0 = 10Ω, 1K00 = 1KΩ

Absolute Tolerance Code
J = ±5%; F = ±1%

Standard Packaging
RoHS compliant tube (50 pcs per tube)

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - Through Hole](#) *category:*

Click to view products by [TT Electronics](#) *manufacturer:*

Other Similar products are found below :

[M8340104M4701GCD03](#) [M8340105K3300GGD03](#) [M8340105K3922FGD03](#) [M8340106K1002JCD03](#) [M8340107K1002GGD03](#)
[M8340107K1152FGD03](#) [M8340107K2701GCD03](#) [M8340107M2002GCD03](#) [M8340108K1000GCD03](#) [M8340108K5601GCD03](#)
[M8340108M2203GCD03](#) [M8340109K1002JCD03](#) [M8340109K1003GCD03](#) [M8340109K5101GGD03](#) [FHV05010M0FKRB](#) [MOX-2-125005F](#) [MP850-3.00-1%](#) [hte24511kf](#) [SM-SP093](#) [ARC3.11 2M J A](#) [M8340105K1001GCD03](#) [M8340105K3002GGD03](#)
[M8340105M1002JGD03](#) [M8340107K2001GGD03](#) [M8340107K4701GGD03](#) [M8340107K5101GGD03](#) [M8340107K5600GGD03](#)
[M8340108K4990FGD03](#) [M8340108K49R9FGD03](#) [M8340108M10R0GGD03](#) [M8340109K2202GGD03](#) [M8340109K5601GCD03](#) [MOX-GRD-001](#) [MOX-SP020](#) [MOX-SP025E](#) [M8340107K2001GCD03](#) [M8340102M4701GBD04](#) [M8340102K1002GBD04](#)
[M8340102K1002GAD04](#) [M8340109K2002GGD03](#) [M8340108K22R0GGD03](#) [M8340107M5100GGD03](#) [OE1305](#) [WMHP100-R22J](#)
[M8340104K39R2FCD03](#) [M8340106MA012JHD03](#) [M8340107K1003GGD03](#) [MS126-9.09K-0.1%](#) [MS126-249K-0.1%](#) [MS-221-82R5](#)