


Thick Film High Power Chip Resistor

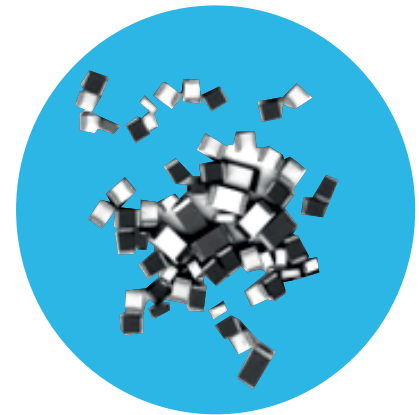

WHPC Series

- Double the standard power for size
- Inverse terminated versions
- Small footprint
- Excellent pulse performance
- RoHS compliant
- AEC-Q200 Qualified

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

		1206	2010	0612	1020	1218	1225
Power rating @70°C	watts	0.5	1.0	0.5	1.0	1.0	1.5
Resistance range	ohms	1R0 to 10M		1R0 to 1M			10R to 1M
Limiting element voltage	volts	200					
Standard values		E24 (1% & 5%) & E96 (1%)					
Tolerance	%	1, 5		≤10R:5 >10R:1, 5		1, 5	
TCR(-55°C to 155°C)	ppm/°C	≤10R: 200 >10R-1M0: 100 >1M0: 200		<10R: 400 10R-100R: 200 >100R: 100			
Ambient temperature range	°C	-55 to +155					
Pad / trace area *	mm ²	50	60	40	50	50	90

*Recommended minimum pad & adjacent trace area for each termination for rated power dissipation on FR4 PCB

Physical Data

Dimensions (mm) & weight (mg)							
	L	W	T	A	C	wt.	
1206	3.1±0.1	1.55±0.1	0.55±0.1	0.5±0.2	0.5±0.25	9	
2010	5.0±0.2	2.5±0.15	0.55±0.1	0.5±0.2	0.6±0.25	25	
0612	3.2±0.15	1.6±0.15	0.55±0.1	0.3±0.2	0.45±0.2	10	
1020	5.0±0.15	2.5±0.15	0.55±0.1	0.4±0.2	0.6±0.2	26	
1218	4.6±0.15	3.1±0.1	0.55±0.1	0.4±0.2	0.45±0.2	27	
1225	6.25±0.15	3.1±0.15	0.55±0.1	0.65±0.2	0.45±0.2	39	


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Construction

WHPC 1206 and 2010 Size

Thick-film electrodes, resistor material, overglaze and organic protection are screen printed on an alumina substrate. Wrap-around terminations have an electroplated nickel barrier and matt tin plating; this ensures excellent leach resistance properties and solderability.

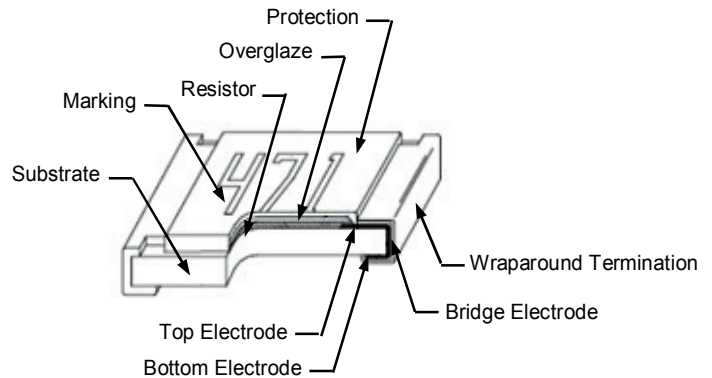

Marking

5% parts are marked with 3 digits. The first two digits are significant figures and the third digit is the number of zeros to follow. The letter “R” represents a decimal point.

1% parts have four digits, the first three digits are significant figures and the fourth digit is the number of zeros to follow. The letter “R” represents a decimal point.

Solvent Resistance

The body protection is resistant to all normal industrial cleaning solvents suitable for printed circuits.

Performance Data

AEC-Q200 Table 7		Method	Max.			Typ.
ref.	Test		Tol:	F	J	
3	High Temp. Exposure *	MIL-STD-202 Method 108	$\Delta R\%$	1	3	0.15
4	Temperature Cycling	JESD22 Method JA-104	$\Delta R\%$	0.5 +0.05 Ω	1.5 +0.1 Ω	0.1
6	Moisture Resistance	MIL-STD-202 Method 106	$\Delta R\%$	2 +0.1 Ω	3 +0.1 Ω	0.05
7	Biased Humidity *	MIL-STD-202 Method 103	$\Delta R\%$	2	3 +0.1 Ω	0.2
8	Operational Life (Cyclic Load) *	MIL-STD-202 Method 108	$\Delta R\%$	2	3 +0.1 Ω	0.2
14	Vibration	MIL-STD-202 Method 204	$\Delta R\%$	0.5 +0.05 Ω	1 +0.05 Ω	0.1
15	Resistance to Soldering Heat *	MIL-STD-202 Method 210	$\Delta R\%$	1		0.05
16	Thermal Shock *	MIL-STD-202 Method 107	$\Delta R\%$	0.5	1	0.05
18	Solderability *	J-STD-002	>95% coverage			
21	Board Flex *	AEC-Q200-005	$\Delta R\%$	1		0.25
22	Terminal Strength	AEC-Q200-006	no damage			
	Climatic *	Category 55/155/42	$\Delta R\%$	2	3	0.2
	Short Term Overload *	6.25 x Pr or 2 x LEV for 5s	$\Delta R\%$	1.5	2 +0.1 Ω	0.15
	Pulse Loading Capability	10,000 pulses @70°C See graphs below	$\Delta R\%$	2		0.5
	Insulation Resistance *	400V for 1 minute	$\geq 10G$			

1. Full AEC-Q200 qualification applies to 1206 and 2010 sizes. Other sizes received the tests marked *.



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


WHPC Series

Pulse Loading Capability


Test condition: 10,000 pulses at 70°C. Single pulse condition has mean power $\leq 10\%$ of Pr. Continuous pulse condition has mean power = Pr.

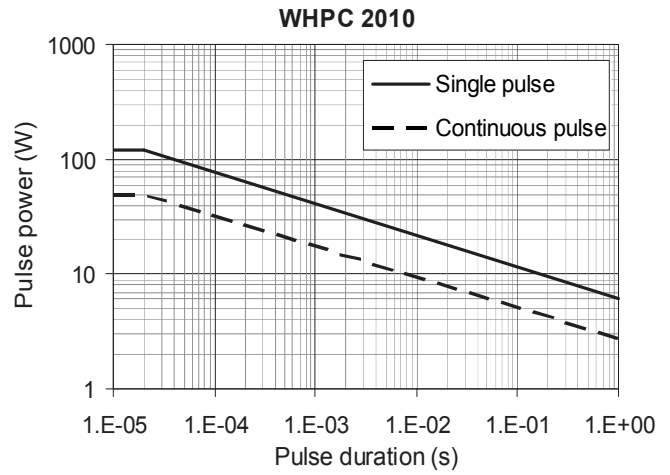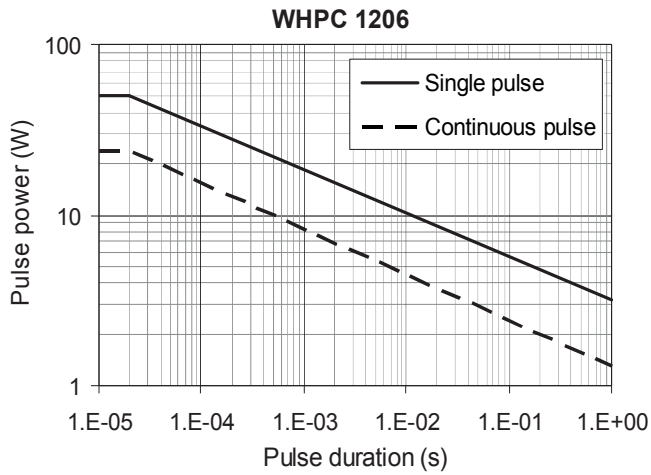

De-Rating Curve

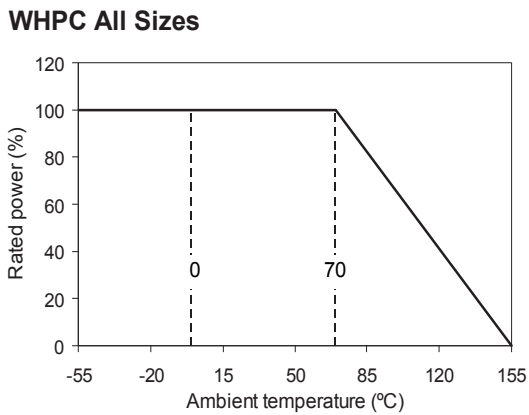


Temperature Rise (hotspot)

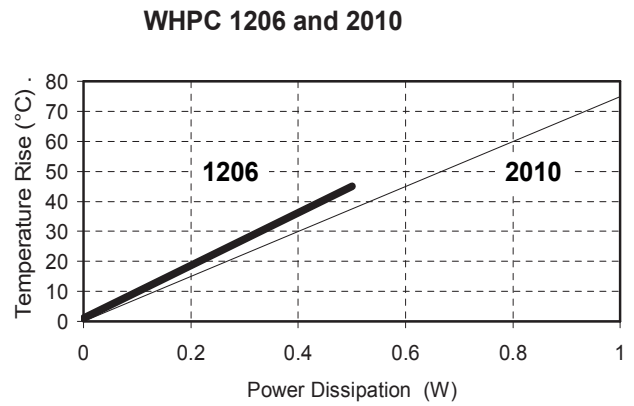

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Packaging

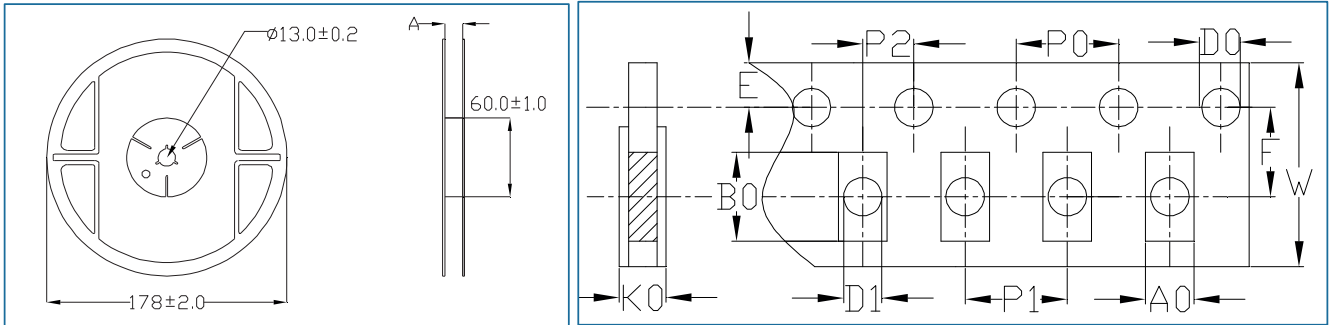


Tape dimensions in mm

Type	W	P1	P0	P2	D0	D1	E	F	A0	B0	K0	A
1206	±0.3 8.0	±0.1 4.0	±0.1 4.0	±0.05 2.0	±0.1 1.5	±0.2 1.0	±0.1 1.75	±0.05 3.5	±0.2 1.9	±0.2 3.5	±0.1 0.85	±1 9
2010	12.0	4.0	4.0	2.0	1.5	1.5	1.75	5.5	2.79	5.5	1.2	13.0
0612	8.0	4.0	4.0	2.0	1.5	N.A	1.75	3.5	2.0	3.60	0.81	10.0
1020	12.0	4.0	4.0	2.0	1.5	N.A	1.75	5.5	2.8	5.40	0.75	13.8
1218	12.0	4.0	4.0	2.0	1.5	1.5	1.75	5.5	3.5	4.80	1.0	13.8
1225	12.0	4.0	4.0	2.0	1.5	1.5	1.75	5.5	3.5	6.70	1.0	13.8

Ordering Procedure

Example: WHPC1206 at 10 kilohms and 1% tolerance on a reel of 5000 pieces -

WHPC1206-10KFT5

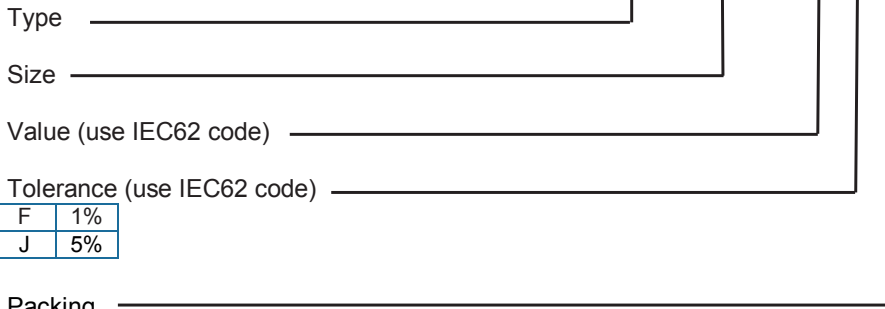

F	1%
J	5%

T5	Tape	1206, 0612	5000/reel	Standard
T4		2010, 1020, 1218, 1225	4000/reel	

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category:](#)

Click to view products by [TT Electronics manufacturer:](#)

Other Similar products are found below :

[CRCW04028R20JNEE](#) [CRCW06036K80FKEE](#) [CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#)
[RC1005F471CS](#) [RC1005F4751CS](#) [RCP0603W100RGED](#) [ERJ-1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#)
[25121WF1003T4E](#) [25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-2.2K-RC](#) [292-4.7K-RC](#) [25121WF4700T4E](#) [292-470K-RC](#) [302-1.0M-](#)
[RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#) [CRCW060320K5FKEE](#) [CRG0201F10K](#) [RCP2512B100RGWB](#)
[RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-075K1L](#) [5-2176094-4](#) [35202K7JT](#)
[WF06Q1000FTL](#) [ERJ-S14J4R7U](#) [CHP2512L4R30GNT](#) [WR12X1621FTL](#) [RCWP11001K00FKS3](#) [LRC-LRF3W-01-R050-FTR1800](#) [9-](#)
[2176088-6](#) [NRC06F1002TR20F](#) [CRCW02013M30FNED](#) [CRCW060343K0FKEE](#) [WR04X5360FTL](#) [RCA060345K3FKEA](#)
[LTR100JZPF33R0](#) [5-2176091-5](#)