

Insertion Tools




Insertion tool (2AB)

Features

- Terminates and crops excess wire simultaneously
- Integral wire extraction hook
- Robust design suitable for system installation
- OEM available for re-branding or re-design
- Enhanced anti-vibration features ensure a lifetime of at least 10,000 terminations
- Available in grey (2AN) and blue with logo (2AB)

Specifications

- Moulded plastic housing
- Strengthened nylon head
- Hardened manganese steel jaws
- 32.5mm x 175mm x 20mm approx

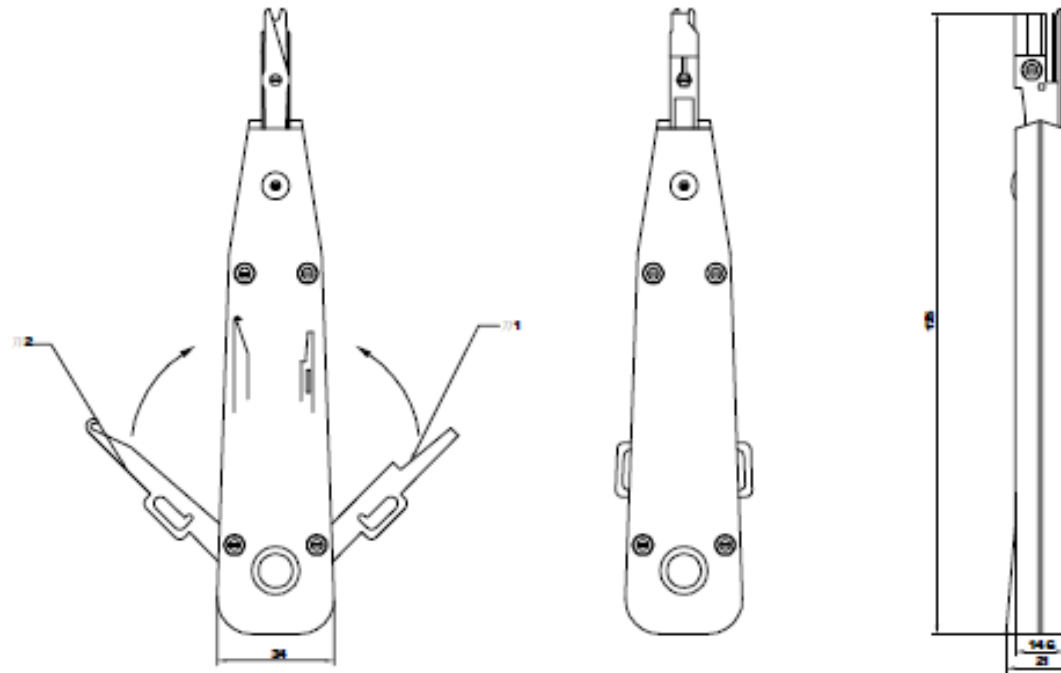

2AN

Technical Data:

1. Housing: ABS
2. Head: Nylon & 62 Manganese Steel, secured with anti vibration nut
3. Spring: Stainless Steel
4. Other metal: 62 Manganese Steel
5. Nuts and Bolts material: S235JR
6. Insulation resistance: about 1,000 MegaOhm
7. Operating temperature: between - 25 degrees C. and 70 degrees C.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tuk manufacturer](#):

Other Similar products are found below :

[SP1GN](#) [SP2GN](#) [SJKWHB](#) [SLJWHPM](#) [SEKH1](#) [SKFRD](#) [KCUAA2BKDPM](#) [KOCSMDPM](#) [SGPDL1GY](#) [SP10YW](#) [FACBK](#) [KPH1BK](#)
[SEKEI-45WH](#) [SP0.5GN](#) [KBNC50DPM](#) [SGKH2](#) [SEPZ5YW](#) [SGPZ3BK](#) [KOCSM](#) [KBNC75PM](#) [KOLSMDPM](#) [MGOPPL25](#) [KCHD90WH](#)
[KUA2WH](#) [LJNTE5A](#) [FJ445](#) [SKH1LJ](#) [SP5RD](#) [KH1](#) [SP1RD](#) [AAVNTECC](#) [SGKSJEPM](#) [SP2YW](#) [T2079](#) [SGKSSU-45WH](#) [SG78](#)
[KRCAWHWH](#) [KRCAWHWHPM](#) [SEKEIPM](#) [ADQ88](#) [SKFWHPM](#) [SP0.5RD](#) [SP10GY](#) [SACSLJ](#) [KA6-45BKEP](#) [KOLSMDXPM](#) [SKH2](#)
[TSY](#) [KSH66WH](#) [KOTMMDPM](#)