



SHENZHEN TUOFENG SEMICONDUCTOR TECHNOLOGY CO. LTD

SCHOTTKY BARRIER RECTIFIER


SR520 THRU SR5100

FEATURES

- Fast switching speed
- Low forward voltage
- Low power high efficiency
- High surge capability
- High temperature soldering guaranteed
250°C/10 seconds, 0.373"(9.5mm)lead length

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: solderarable per MIL-STD-202E method 208C
- Polarity: Color band denoted cathode end
- Mounting position: Any
- Weight: 0.045 ounce, 1.27 gram

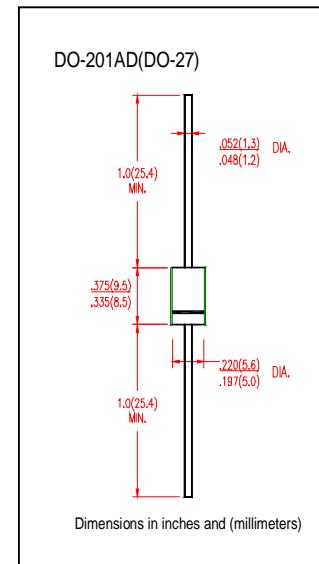

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SR520	SR530	SR540	SR550	SR560	SR580	SR5100	UNIT				
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	Volts				
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	Volts				
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	Volts				
Maximum Average Forward Rectified Current, 0.375"(9.5mm) Lead length, (Note 1) See Fig.1	T _L = 60°C(SR502-504) T _L = 85°C(SR505-510)	I _(AV)	5.0						Amps				
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150						Amps					
Maximum Instantaneous Forward Voltage @ 5.0A	V _F	0.55		0.75		0.85		Volts					
Maximum DC Reverse Current at rated DC Blocking Voltage per element (Note 1)	T _A = 25°C T _A = 100°C	I _R	1.0				50						
Typical Junction Capacitance(Measured at 1.0Hz and applied reverse voltage of 4.0V)	C _J	550		450		350		pF					
Typical Thermal Resistance	R _{θJA}	15						°C/W					
Operating Junction Temperature Range	T _J	(-55 to +150)						°C					
Storage Temperature Range	T _{STG}	(-55 to +150)						°C					

Notes:

1. Pulse test: 300 μ s pulse width, 1% duty cycle



SHENZHEN TUOFENG SEMICONDUCTOR TECHNOLOGY CO. LTD

SCHOTTKY BARRIER RECTIFIER

SR520 THRU SR5100

RATING AND CHARACTERISTIC CURVES S

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

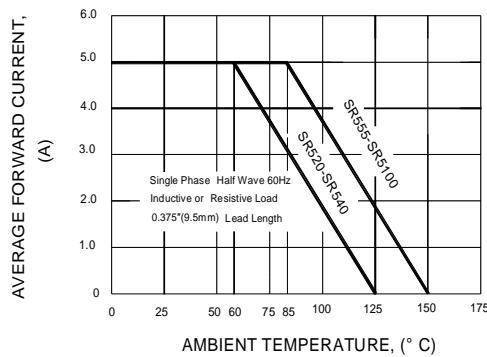


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

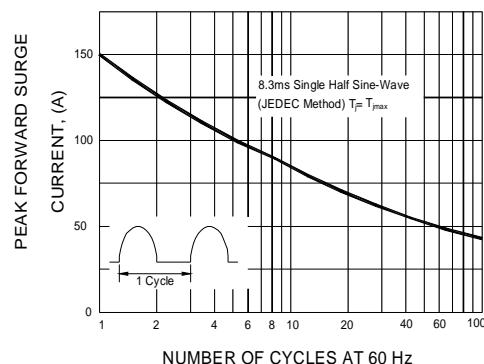


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

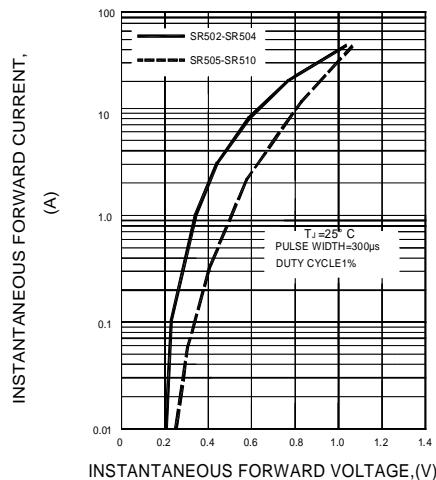


FIG.4-TYPICAL REVERSE CHARACTERISTICS


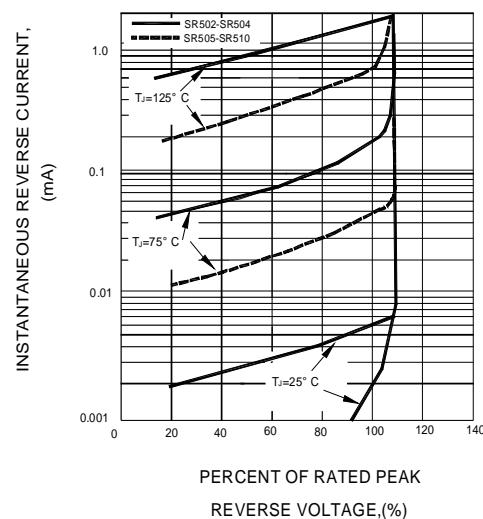


FIG.5-TYPICAL JUNCTION CAPACITANCE

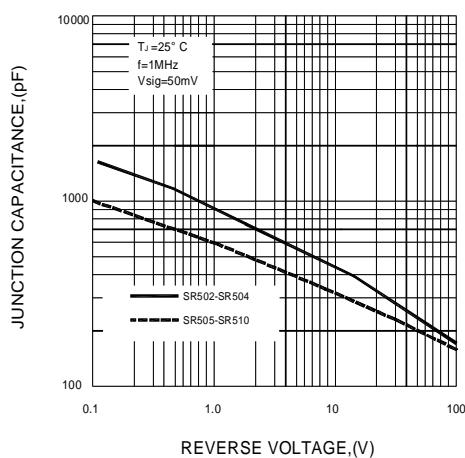

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by TuoFeng manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)