This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []


ALL METAL PARTS SILVER PLATED






Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

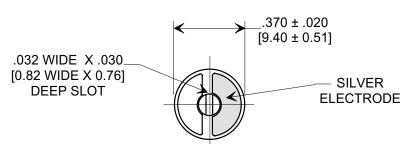

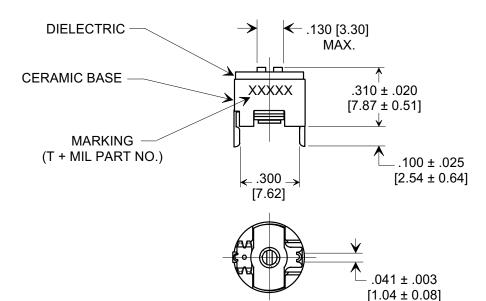

SPECIFICATIONS									
TUSONIX PART NO.	538-054 A 5.5 - 18								
Capacitance Range:	5.5 - 18 pF								
Capacitance Tolerance:	MIN: +0%, MAX: -0, +50%								
Temperature Characteristic:	DIELECTRIC CODE A								
Working Voltage:	350 VDC AT + 85°C								
Operating Temperature Range:	-55°C TO + 125°C								
To MIL - C - 81/4C CV31A180									



DIA.

Γ_{C}	V31 <i>F</i>	\180									
Secord 0	RIC, IENTATION ED	1 1		TO unless of 2 PLC. DECIM 3 PLC. DECIM	otherwi	040 [0 25]		CERAMIC TRIMMER			
リラト	961£	METI ORI ODD	1-01			ANGL	.ES ± /		Drawn	S.M. 06-17-99	Scale 2 X
ISION Pele 999	999)	TOL'S IN N CIRCUIT& SYMBOL A L.E. 05-04-	20070504	TI	TUSONIX		Approved H.R. 06-17-99				
REV	Origina C.O. 1				- \		ARIZONA	Α	538-054 A 5.	5 - 18	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Trimmer/Variable Capacitors category:

Click to view products by Tusonix / CTS manufacturer:

Other Similar products are found below:

8000-5130 GKY20086 GNC8R050 GXA18000 GXA36000 GXC90000 GXE5R000NM GXL10000 GZN60100 PC50H230 PC50J110 PC51H230 GDT40026 GKU90020 GNR4R550 GNR8R050 GXL15000 538-011 D 9-35LF SGC3S100NM PC39G520 STPTIC-15G2C5 STPTIC-82G2C5 GNL8R050 GYB5R000 BFC280823508 GXL18000 GKG30086-05 GHC5R500 GKG10086 GZD80000 0538-000-A-5.5-18LF 0538-006-F-15.0-60LF TP11G KT1SD KF8 KP8 KM8 KG8 KJ8 KT8 KG10 KP10 KF10 KJ10 KM10 TP42C NMAJ25HV TM120C KF4SD KJ1SD