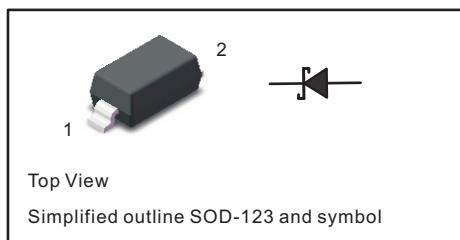


**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode


**Features**

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited for automatic insertion




**Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage BAV19W BAV20W BAV21W	$V_{RRM}$	120	V
		200	
		250	
Reverse Voltage BAV19W BAV20W BAV21W	$V_R$	100	V
		150	
		200	
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Forward Continuous Current	$I_{FM}$	400	mA
Repetitive Peak Forward Current	$I_{FRM}$	625	mA
Non-repetitive Peak Forward Surge Current at $t = 1 \text{ ms}$ at $t = 1 \text{ s}$	$I_{FSM}$	2.5	A
		0.5	
Power Dissipation	$P_d$	250	mW
Operating and Storage Temperature Range	$T_j, T_{stg}$	- 65 to + 150	°C

**Characteristics at  $T_a = 25^\circ\text{C}$** 

Parameter	Symbol	Min.	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 200 \text{ mA}$	$V_F$	-	1 1.25	V
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$ BAV19W BAV20W BAV21W	$V_{(BR)R}$	120	-	V
		200	-	
		250	-	
Reverse Current at $V_R = 100 \text{ V}$ at $V_R = 150 \text{ V}$ at $V_R = 200 \text{ V}$ BAV19W BAV20W BAV21W	$I_R$	-	100	nA
		-	100	
		-	100	
Total Capacitance at $V_R = 0, f = 1 \text{ MHz}$	$C_T$	-	5	pF
Reverse Recovery Time at $I_F = I_R = 30 \text{ mA}, I_{rr} = 0.1I_R, R_L = 100 \Omega$	$t_{rr}$	-	50	ns


## Typical Characteristics

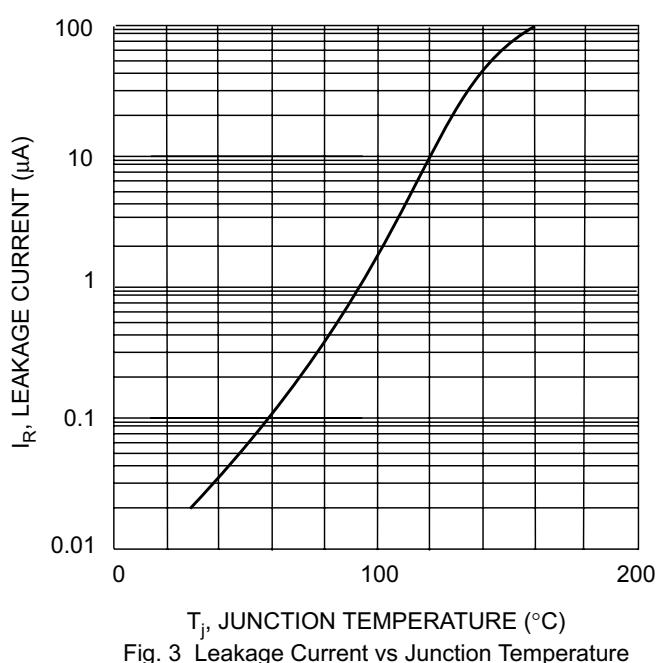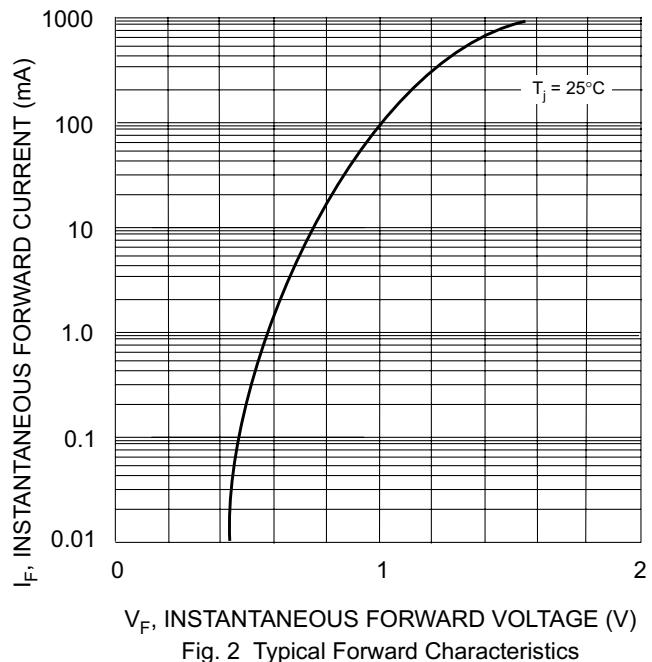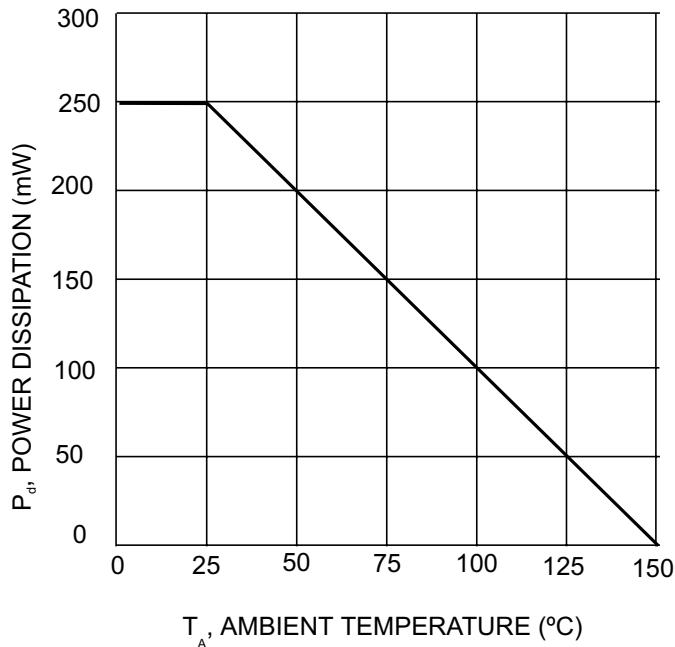

## PACKAGE OUTLINE

**Plastic surface mounted package; 2 leads**

**SOD-123**

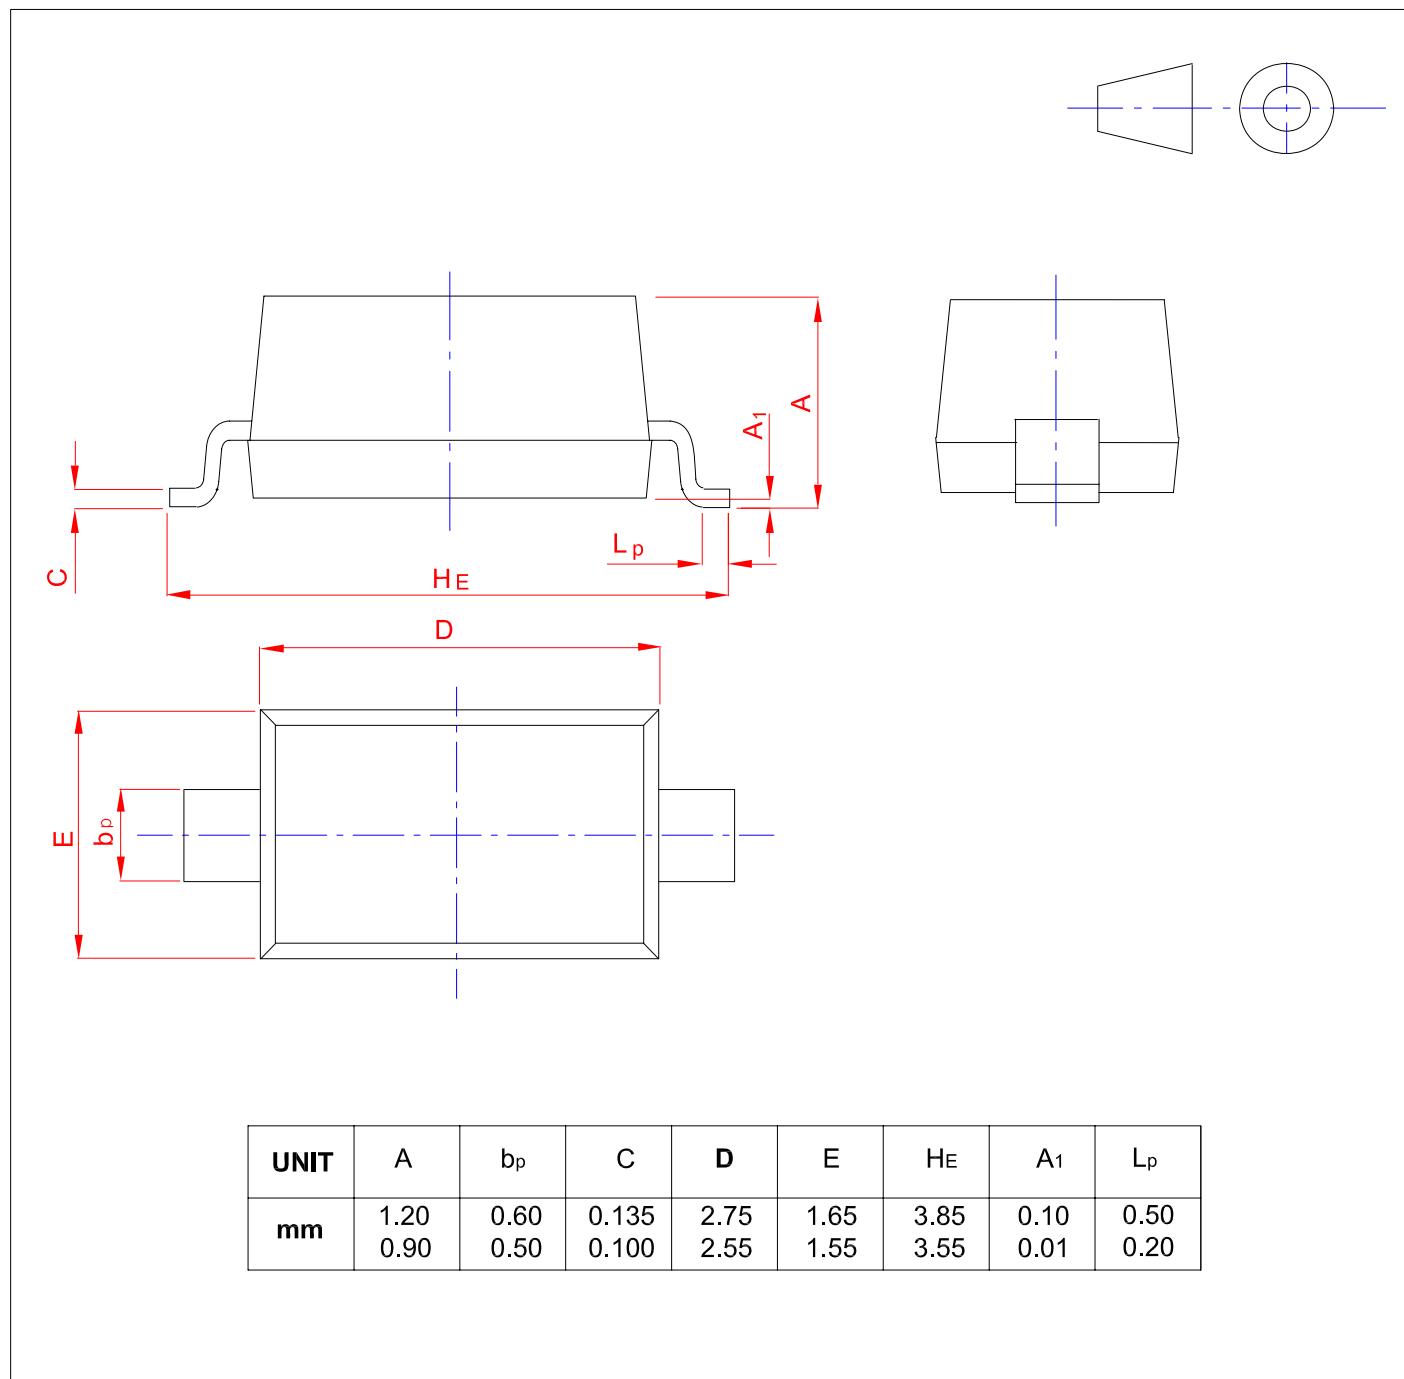

UNIT	A	b <sub>P</sub>	C	D	E	H <sub>E</sub>	A <sub>1</sub>	L <sub>P</sub>
<b>mm</b>	1.20 0.90	0.60 0.50	0.135 0.100	2.75 2.55	1.65 1.55	3.85 3.55	0.10 0.01	0.50 0.20

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by TWGMC manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#)  
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#)  
[NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#)  
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#) [SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#)  
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#)  
[ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#)  
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)