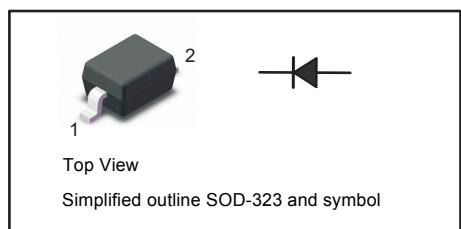


**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode


**Features**

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited for automatic insertion

**Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage BAV19WS BAV20WS BAV21WS	$V_{RRM}$	120	V
		200	
		250	
Reverse Voltage BAV19WS BAV20WS BAV21WS	$V_R$	100	V
		150	
		200	
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Forward Continuous Current	$I_{FM}$	400	mA
Repetitive Peak Forward Current	$I_{FRM}$	625	mA
Non-Repetitive Peak Forward Surge Current at $t = 1 \mu\text{s}$ at $t = 1 \text{ s}$	$I_{FSM}$	2.5	A
		0.5	
Power Dissipation	$P_{tot}$	200	mW
Operating and Storage Temperature Range	$T_j, T_{stg}$	- 65 to + 150	°C

**Characteristics at  $T_a = 25^\circ\text{C}$** 

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$ BAV19WS BAV20WS BAV21WS	$V_{(BR)R}$	120	-	V
		200	-	
		250	-	
Reverse Current at $V_R = 100 \text{ V}$ at $V_R = 150 \text{ V}$ at $V_R = 200 \text{ V}$ BAV19WS BAV20WS BAV21WS	$I_R$	-	100	nA
		-	100	
		-	100	
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 200 \text{ mA}$ BAV19WS BAV20WS BAV21WS	$V_F$	-	1	V
		-	1.25	
Total Capacitance at $V_R = 0, f = 1 \text{ MHz}$	$C_T$	-	5	pF
Reverse Recovery Time at $I_F = I_R = 30 \text{ mA}, I_{RR} = 0.1 \times I_R, R_L = 100 \Omega$	$t_{rr}$	-	50	ns

## Typical Characteristics

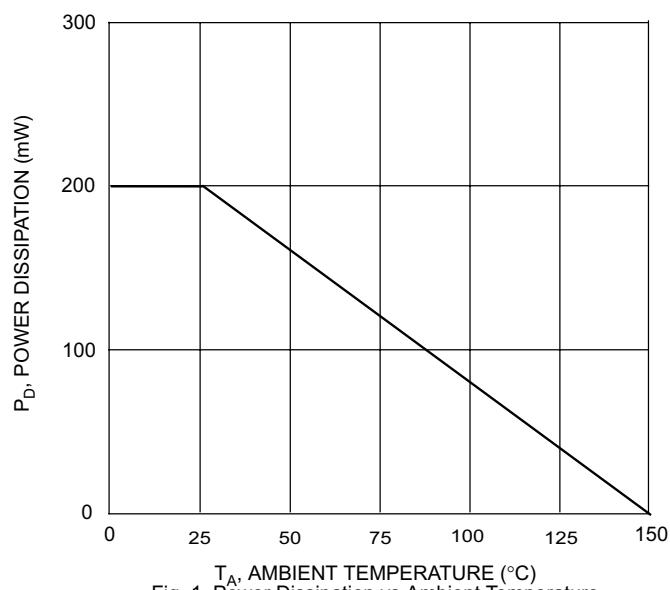


Fig. 1 Power Dissipation vs Ambient Temperature

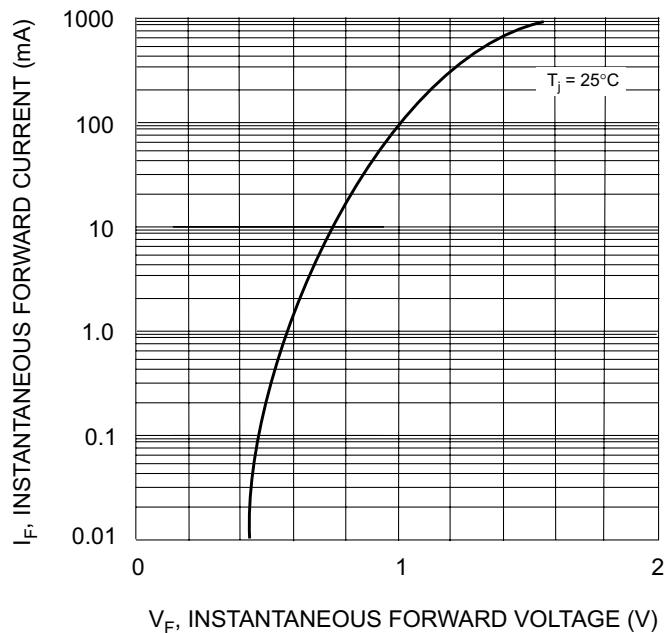


Fig. 2 Forward Characteristics


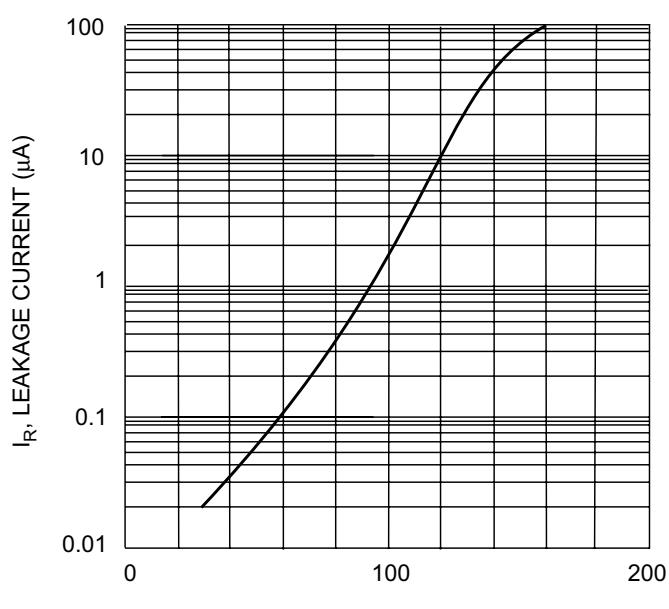


Fig. 3 Leakage Current vs Junction Temperature

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-323

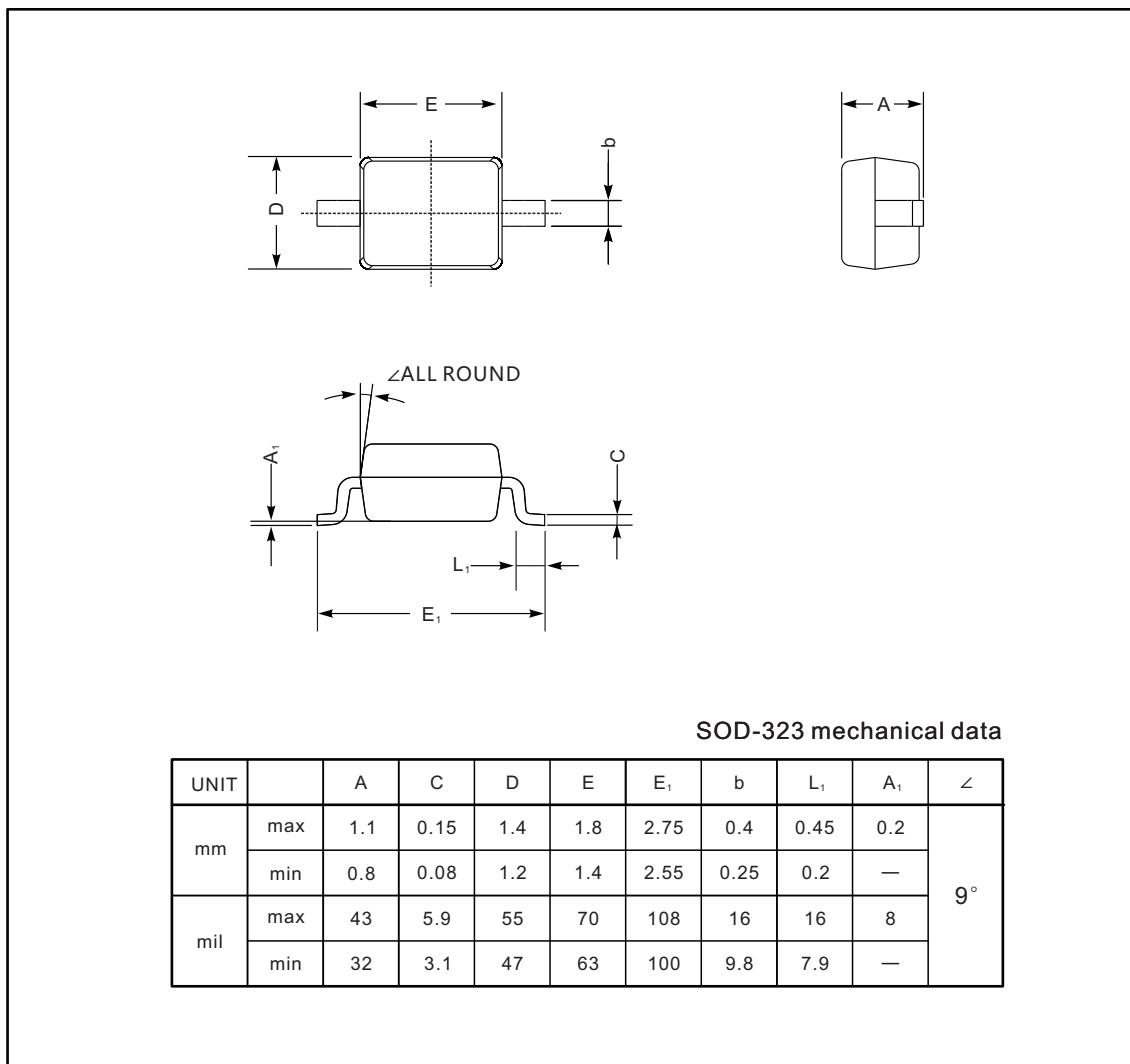

SOD-323 mechanical data

UNIT		A	C	D	E	$E_1$	b	$L_1$	$A_1$	$\angle$
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	$9^\circ$
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	$9^\circ$
	min	32	3.1	47	63	100	9.8	7.9	—	

### The recommended mounting pad size

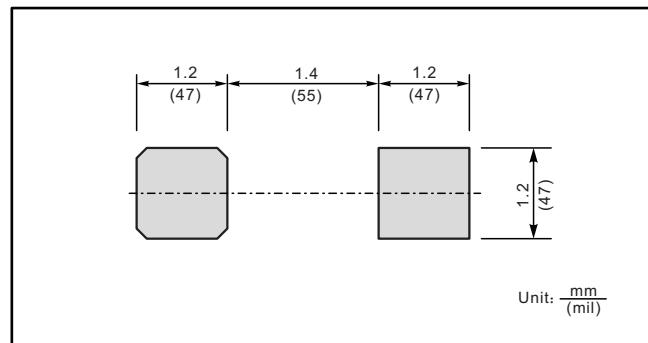

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Diodes - General Purpose, Power, Switching category:***

***Click to view products by TWGMC manufacturer:***

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#)  
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)  
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4153-1](#)  
[JAN1N4454-1](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#)  
[1N4454-TR](#) [BAV199E6433HTMA1](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#)  
[NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#)