




# ES3A THRU ES3J

## SURFACE MOUNT SUPER FAST RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 3.0 Amperes

### DO-214AB/SMC

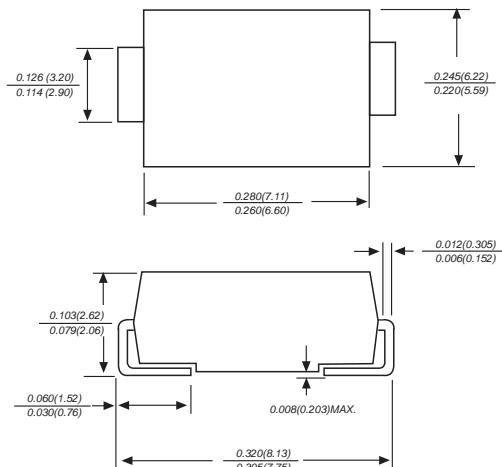

Dimensions in inches and (millimeters)

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals
- Glass passivated chip junction

### MECHANICAL DATA

**Case :** JEDEC DO-214AB molded plastic body over passivated chip

**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Color band denotes cathode end

**Mounting Position :** Any

**Weight :** 0.007 ounce, 0.25grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

TWGMC Catalog Number	SYMBOLS	ES3A	ES3B	ES3C	ES3D	ES3E	ES3G	ES3J	UNITS
Maximum repetitive peak reverse voltage	V <sub>RMM</sub>	50	100	150	200	300	400	600	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	VOLTS
Maximum average forward rectified current at T <sub>L</sub> =75°C	I <sub>(AV)</sub>				3.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>				100.0				Amps
Maximum instantaneous forward voltage at 3.0A	V <sub>F</sub>		0.95		1.25		1.7		Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>			5.0					µA
				100.0					
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>			35					ns
Typical junction capacitance (NOTE 2)	C <sub>J</sub>			45.0					pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub>			47.0					°C/W
Operating junction and storage temperature range	T <sub>J,TSTG</sub>			-50 to +150					°C


**Note:** 1. Reverse recovery condition I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES ES3A THRU ES3J


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

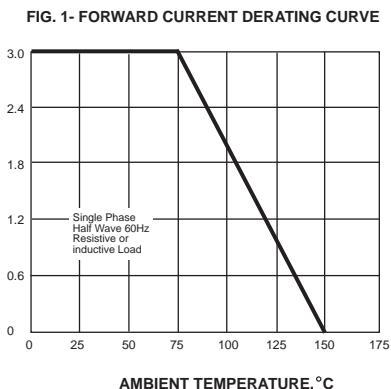


PEAK FORWARD SURGE CURRENT,  
AMPERES

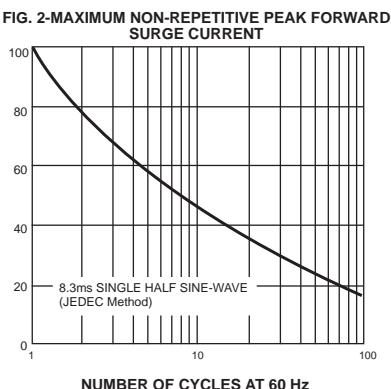


INSTANTANEOUS FORWARD  
CURRENT,AMPERES

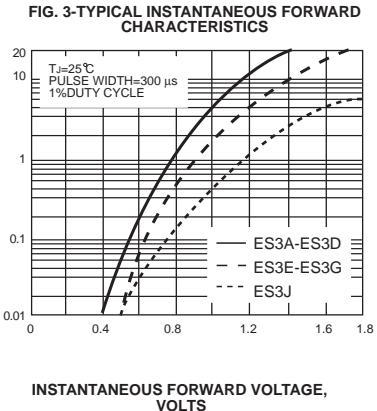


INSTANTANEOUS REVERSE CURRENT,  
MICROAMPERES

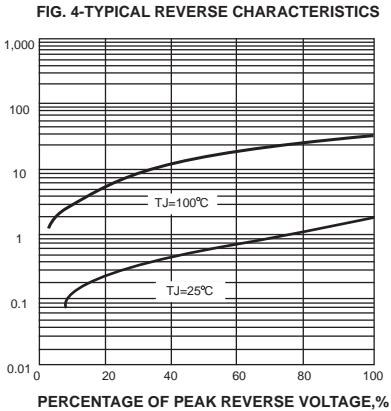

JUNCTION CAPACITANCE, pF

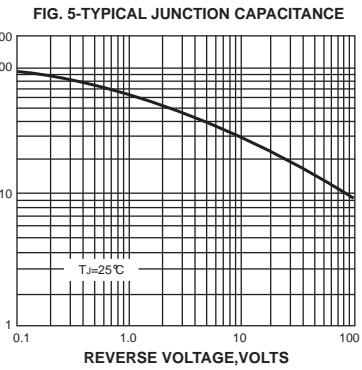

TRANSIENT THERMAL IMPEDANCE,  
°C/W

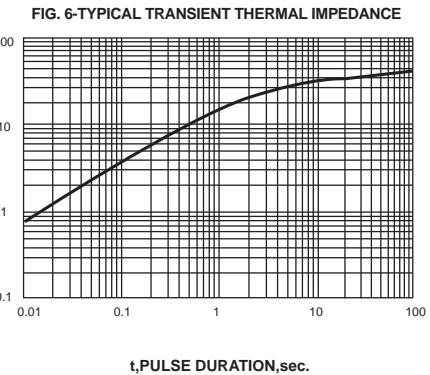

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by TWGMC manufacturer:***

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [JANTX1N5634A](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#) [RRE02VS6SGTR](#) [067907F](#)  
[MS306](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#)  
[ACEFC304-HF](#) [DZ-1380](#) [NTE6356](#) [NTE6359](#) [JAN1N5555](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [SCHJ22.5K](#)  
[SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#)  
[NTE5911](#) [NTE5915](#) [NTE5921](#) [NTE6104](#) [NTE6105](#) [NTE6154](#) [NTE6158](#)