
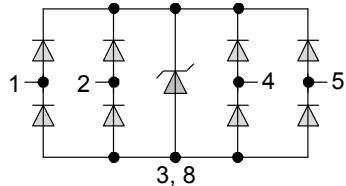


4-Lines, Uni-directional, Ultra-low Capacitance Transient Voltage Suppressors

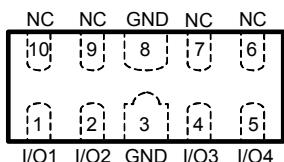

Features

- Protects 4 I/O Lines
- Low Working Voltage: 5 V
- Low Clamping Voltage
- Low Capacitance: 0.3pF (I/O to I/O)
- Response time is typically < 1 ns
- IEC61000-4-2 (ESD) ± 20 kV (air), ± 15 kV (contact)
- IEC61000-4-5 (Surge) 4 A (I/O to GND)
- Pb-Free, RoHS compliant

Applications


- High Definition Multi-Media Interface (HDMI)
- Digital Visual Interface (DVI)
- DisplayPort™ Interface
- MDDI Ports
- PCI Express
- SATA and eSATA Interface
- USB3.0 and USB2.0 up to 480Mb/s
- IEEE1394 up to 3.2 Gb/s
- Ethernet port:10/100/1000 Mb/s

Absolute maximum ratings


Parameter	Symbol	Rating	Unit
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	52	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	4	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 20	kV
ESD according to IEC61000-4-2 contact discharge		± 15	
Junction temperature	T_J	125	°C
Operating temperature	T_{OP}	-40~85	°C
Lead temperature	T_L	260	°C
Storage temperature	T_{STG}	-55~150	°C

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)


Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F
P_{pk}	Peak Power Dissipation
C	Max. Capacitance @ $V_R = 0$ and $f = 1.0 \text{ MHz}$

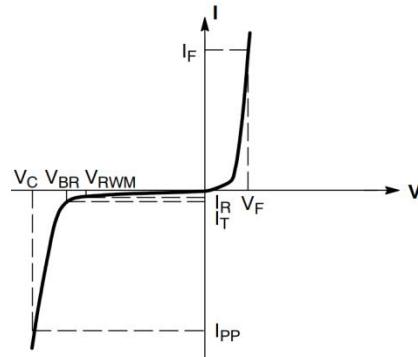
Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}	--	--	5	V	
Breakdown Voltage	V_{BR}	6.5	--	8.5	V	$I_T=1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM}=5\text{V}$
Clamping Voltage (I/O-GND)	V_C	--	--	13	V	$I_{PP}=4\text{A}, T_p=8/20\mu\text{s}$
Junction Capacitance (I/O to GND)	C_J	--	--	0.7	pF	$V_R=0\text{V}, f=1\text{MHz}$
Junction Capacitance (I/O to I/O)	C_J	--	0.3	0.4	pF	$V_R=0\text{V}, f=1\text{MHz}$

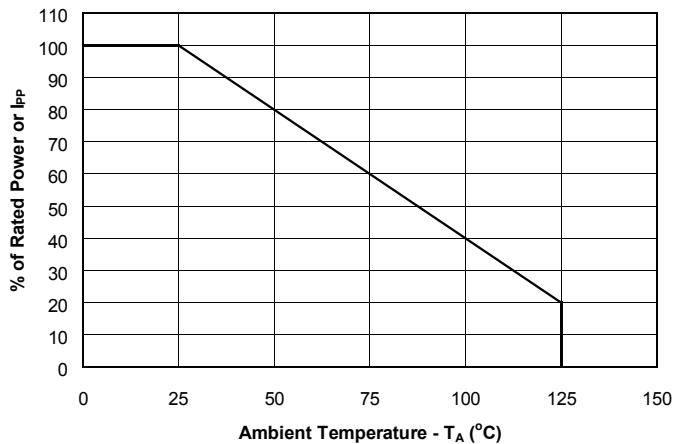


Power Derating Curve

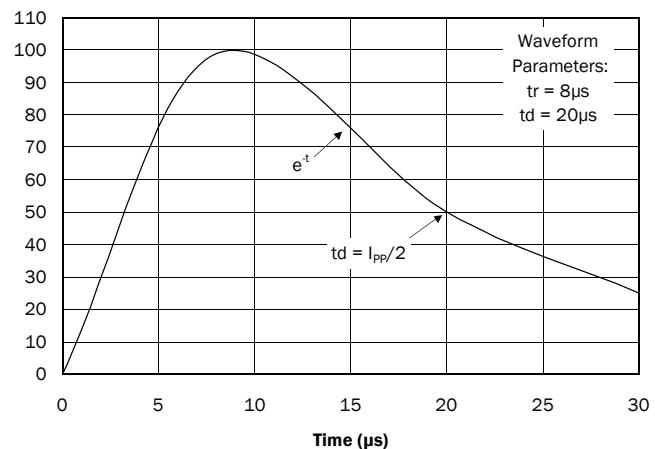


Pulse Waveform

PACKAGE OUTLINE DIMENSIONS

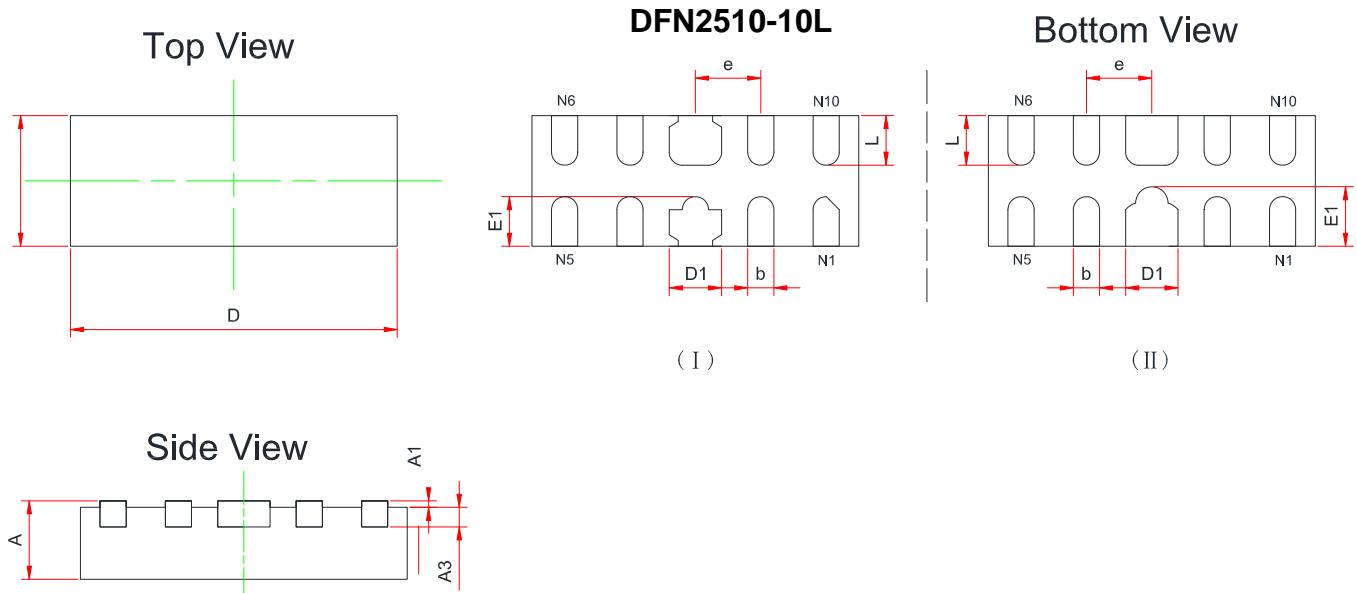

Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.500	0.575	0.650
A1	0.000	-	0.050
A3	0.150 Ref.		
D	2.400	2.500	2.600
E	0.900	1.000	1.100
D1	0.300	0.400	0.500
E1	0.300	0.455	0.610
b	0.130	0.190	0.250
e	0.500 BSC		
L	0.280	0.390	0.500

Recommended land pattern (Unit: mm)

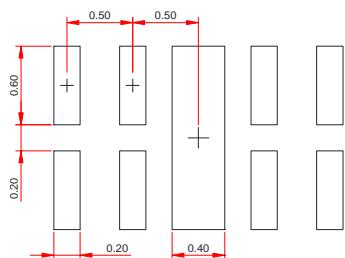

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by TWGMC manufacturer:

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP280A](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#)
[MPLAD30KP24A](#) [MPLAD30KP30CAE3](#) [ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [JANTX1N6144A](#)
[JANTX1N6057A](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#) [MMAD1108E3/TR13](#) [JANTX1N6160A](#)
[D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA BK](#) [CPDQC3V3C-HF](#)
[CPDQC12VE-HF](#) [GRPADATAJANTX1N6041A](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D26V0H1U2LP16-7](#)