

## General Description

SN74LVC1G14 is a non-gate integrated circuit with Schmitt-triggered function, which can achieve  $Y = \overline{A}$  mathematical logic operation. Advanced CMOS process design, with low power consumption and high output driving capability, the power supply voltage VCC between 1.65V and 5.5V chip can work normally. 74LVC1G14 has a variety of small encapsulation shapes, which can be widely used in high-end precision instruments, miniaturized and low-power handheld devices, as well as artificial intelligence and other fields.


## Features

- Low input current.
- Low static power consumption. $I_{cc}=0.1\mu A$ .
- High output drive. $V_{CC}=4.5V$ .
- Wide operating voltage range.1.65V-5.5V
- Packaging form:DBV/DRL/YZP/DCK DRP/DSF/DPW

## Applications

- Portable audio interface
- Blu-ray players and home theaters
- Solid state drives
- Digital TV
- Wireless headphones, smart watches, etc
- Smart wearable Devices

## Pinning and Package

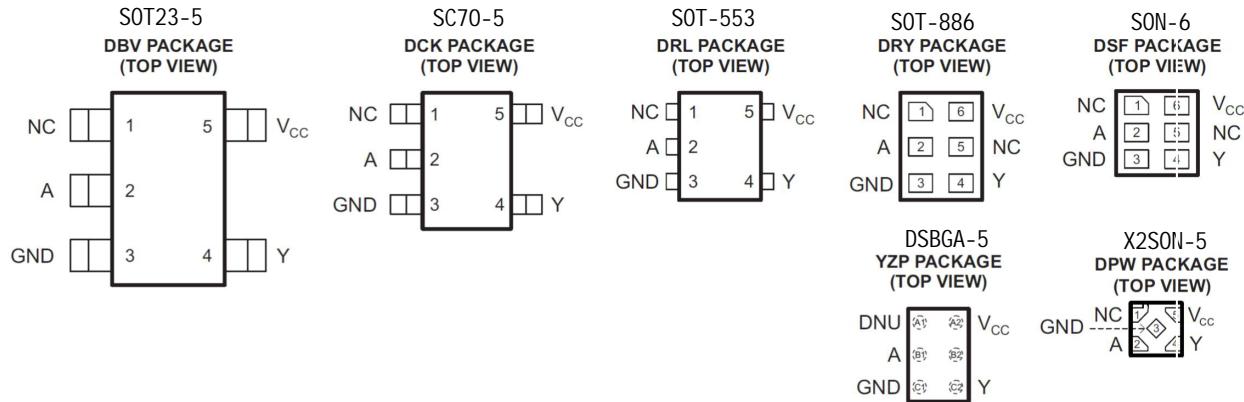

## Pin Functions

PIN					I/O	DESCRIPTION
NAME	DBV, DCK, DRL, DPW	DRY, DSF	YZP	YZV		
A	2	2	B1	A1	I	Signal Input
GND	3	3	C1	B1	—	Ground
N.C.	1	1, 5	—	—	—	No internal connection <sup>(1)</sup>
DNU	—	—	A1	—	—	Do not use <sup>(2)</sup>
V <sub>CC</sub>	5	6	A2	A2	—	Positive Supply
Y	4	4	C2	B2	O	Signal Output

(1) Pins labeled N.C. can be connected to any signal or voltage source, including ground. They should always be soldered to the board.

(2) Pins labeled DNU should not be connected to any signal or voltage source, including ground. They should always be soldered to the board.


## Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
$V_{CC}$	Supply voltage	-0.5	6.5	V
$V_I$	Input voltage <sup>(2)</sup>	-0.5	6.5	V
$V_O$	Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup>	-0.5	6.5	V
$V_O$	Voltage range applied to any output in the high or low state <sup>(2) (3)</sup>	-0.5	$V_{CC} + 0.5$	V
$I_{IK}$	Input clamp current $V_I < 0$		-50	mA
$I_{OK}$	Output clamp current $V_O < 0$		-50	mA
$I_O$	Continuous output current		$\pm 50$	mA
	Continuous current through $V_{CC}$ or GND		$\pm 100$	mA
$T_j$	Maximum junction temperature		150	°C
$T_{stg}$	Storage temperature	-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of  $V_{CC}$  is provided in the recommended operating conditions table.

## Functional Block Diagram



## Device Functional Modes

Inputs	Output
A	Y
L	H
H	L

## Recommended Operating Conditions

		MIN	MAX	UNIT
$V_{CC}$	Supply voltage	Operating	1.65	5.5
		Data retention only	1.5	V
$V_{IH}$	High-level input voltage	$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	$0.65 \times V_{CC}$	V
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7	
		$V_{CC} = 3 \text{ V to } 5..5\text{V}$	$0.7 \times V_{CC}$	
$V_{IL}$	Low-level input voltage	$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	$0.35 \times V_{CC}$	V
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	0.7	
		$V_{CC} = 3 \text{ V to } 5.5 \text{ V}$	$0.3 \times V_{CC}$	
$V_I$	Input voltage	0	5.5	V
$V_O$	Output voltage	0	$V_{CC}$	V
$I_{OH}$	High-level output current	$V_{CC} = 1.65 \text{ V}$	-4	mA
		$V_{CC} = 2.3 \text{ V}$	-8	
		$V_{CC} = 3 \text{ V}$	-16	
		$V_{CC} = 4.5 \text{ V}$	-32	
$I_{OL}$	Low-level output current	$V_{CC} = 1.65 \text{ V}$	4	mA
		$V_{CC} = 2.3 \text{ V}$	8	
		$V_{CC} = 3 \text{ V}$	16	
		$V_{CC} = 4.5 \text{ V}$	32	

### Electrical Characteristics



PARAMETER		TEST CONDITIONS	V <sub>CC</sub>	TYP	MAX	UNIT
V <sub>T+</sub>	–		1. 65V	1	–	V
			2. 3V	1. 35	–	
			3V	1. 7	–	
			4. 5V	2. 5	–	
			5. 5V	3	–	
V <sub>T-</sub>	–		1. 65V	0. 5	–	V
			2. 3V	0. 7	–	
			3V	1. 1	–	
			4. 5V	1. 65	–	
			5. 5V	1. 9	–	
$\Delta V_T$ (V <sub>T+</sub> – V <sub>T-</sub> )	–		1. 65V	0. 5	–	V
			2. 3V	0. 65	–	
			3V	0. 6	–	
			4. 5V	0. 85	–	
			5. 5V	1. 1	–	
V <sub>OH</sub>		I <sub>OH</sub> = -100uA	1. 65V~5. 5V	1. 64	–	V
		I <sub>OH</sub> = -4 mA	1. 65V	1. 47	–	
		I <sub>OH</sub> = -8 mA	2. 3V	2. 15	–	
		I <sub>OH</sub> = -16 mA	3V	2. 73	–	
		I <sub>OH</sub> = -32 mA	4. 5V	4. 0	–	
V <sub>OL</sub>		I <sub>OH</sub> = 100uA	1. 65V~5. 5V	0. 01	–	V
		I <sub>OH</sub> = 4 mA	1. 65V	0. 11	–	
		I <sub>OH</sub> = 8 mA	2. 3V	0. 11	–	
		I <sub>OH</sub> = 16 mA	3V	0. 2	–	
		I <sub>OH</sub> = 32 mA	4. 5V	0. 35	–	
I <sub>I</sub>	A	V <sub>I</sub> = 5. 5V or GND	0~5. 5V	0. 01	±5	uA
I <sub>OFF</sub>	V <sub>I</sub> V <sub>O</sub>	V <sub>I</sub> = 5. 5V	0	0. 01	±10	uA
		V <sub>O</sub> = 5. 5V	0	0. 01	±10	
I <sub>CC</sub>		V <sub>I</sub> = 5. 5V, I <sub>O</sub> = 0	1. 65V~5. 5V	0. 01	10	uA
		V <sub>I</sub> = GND, I <sub>O</sub> = 0		0. 01	10	
ΔI <sub>CC</sub>		A = V <sub>CC</sub> – 0. 6V	3V~5. 5V	25	–	uA

### Switching Characteristics: -40°C to 85°C


over recommended operating free-air temperature range°, (-40°C to 85°C unless otherwise noted) (see )

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub>	C <sub>L</sub> = 15 pF		C <sub>L</sub> = 30 pF or 50 pF		UNIT
				MIN	MAX	MIN	MAX	
t <sub>pd</sub>	A	Y	1.8 V ± 0.15 V	2.8	9.9	3.8	11	ns
			2.5 V ± 0.2 V	1.6	5.5	2	6.5	
			3.3 V ± 0.3 V	1.5	4.6	1.8	5.5	
			5 V ± 0.5 V	0.9	4.4	1.2	5	


## DBV (SOT23-5)

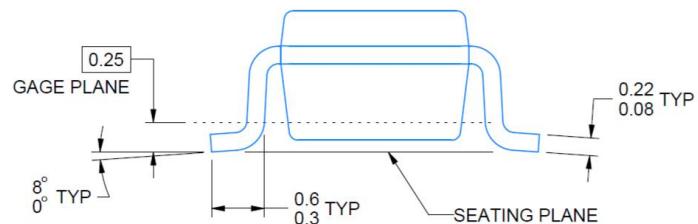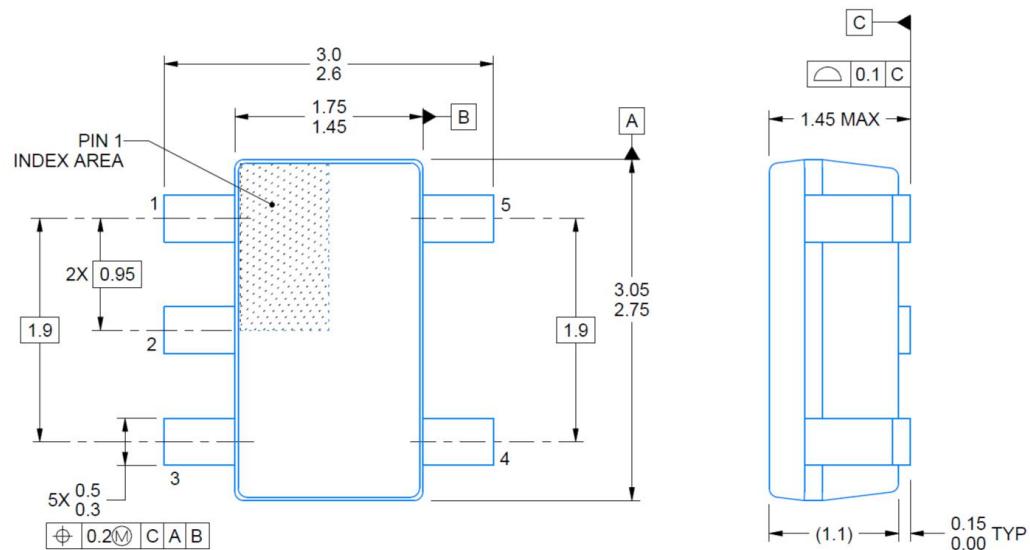


## Marking

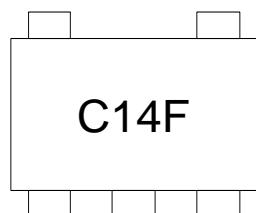


## DCK (SC70-5)

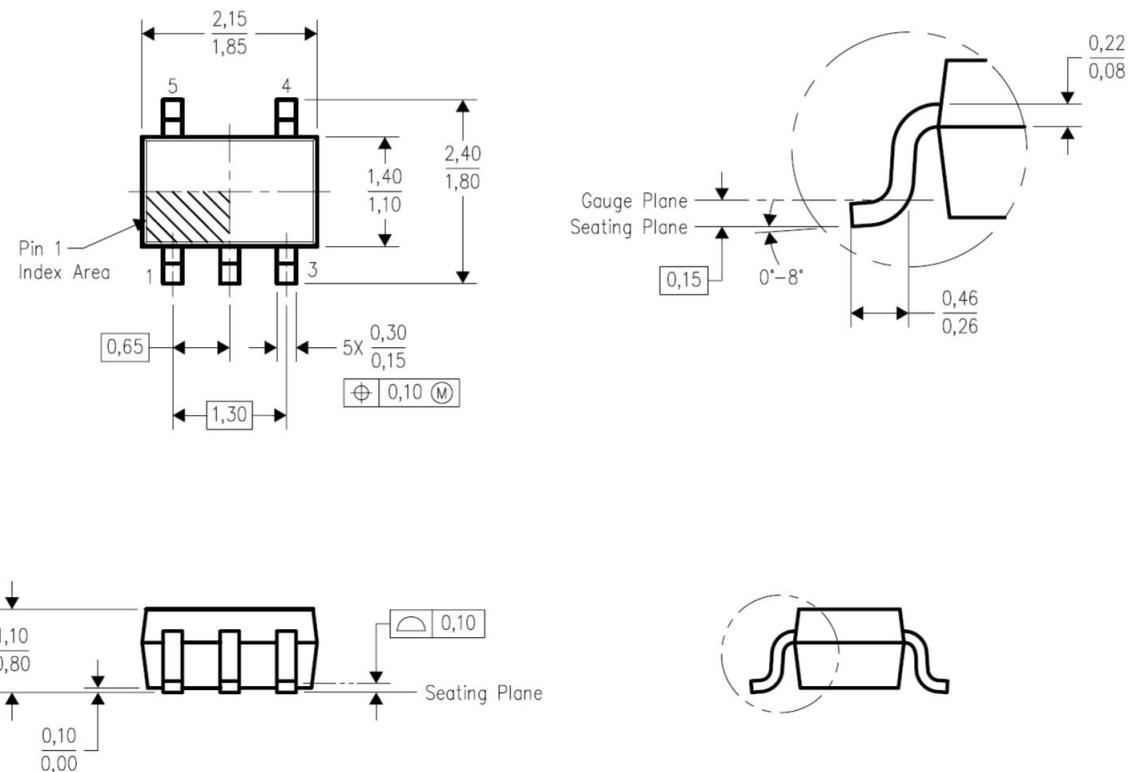


## Marking





DRL (SOT-553)

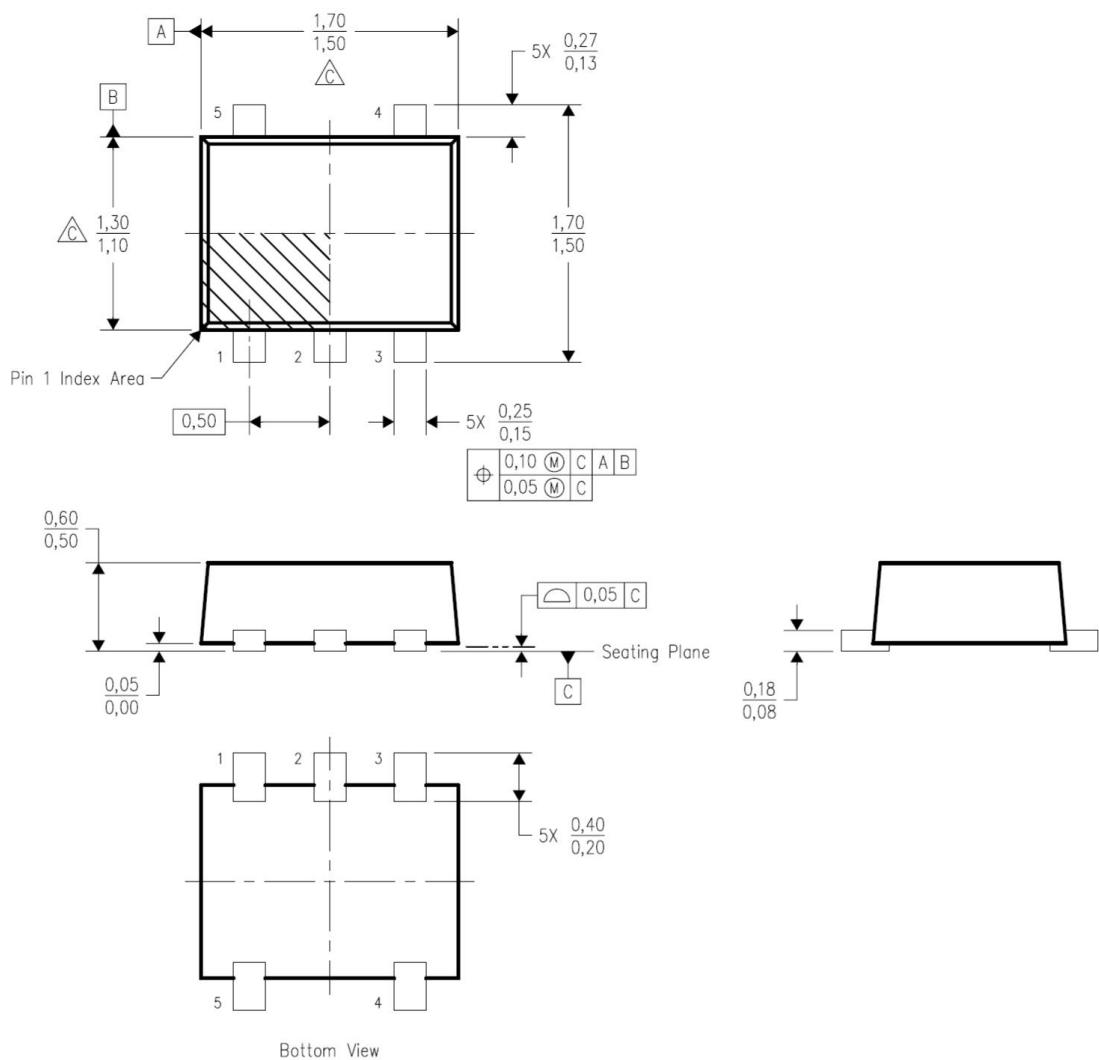


## DRY (SOT-886)

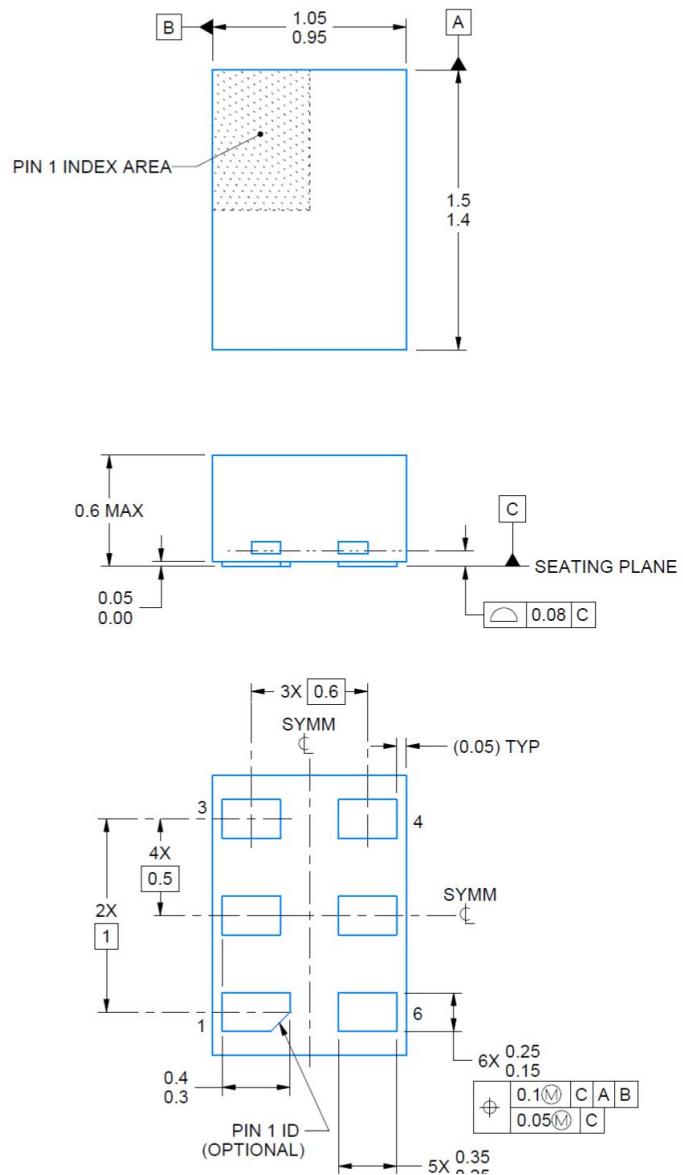

### DSF (SON-6)

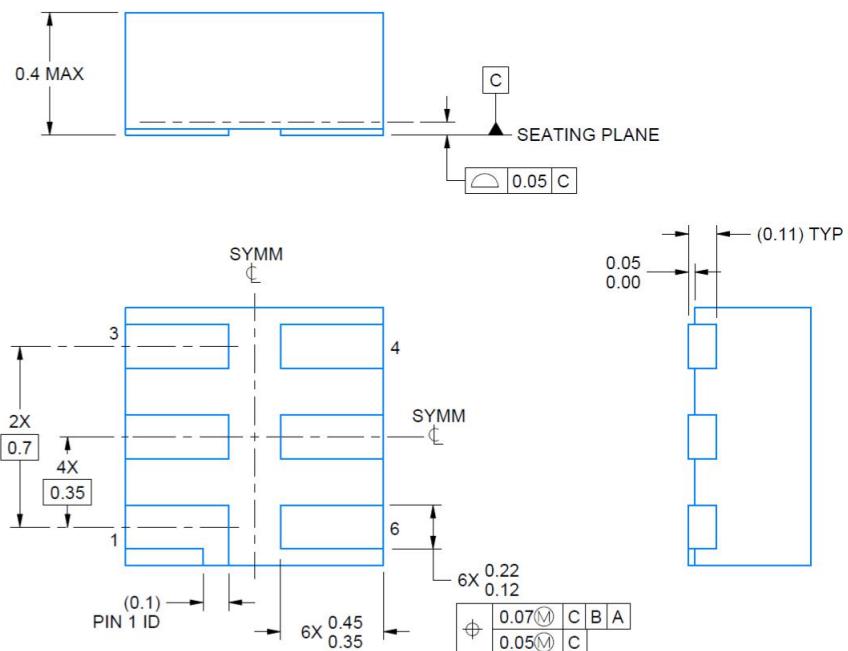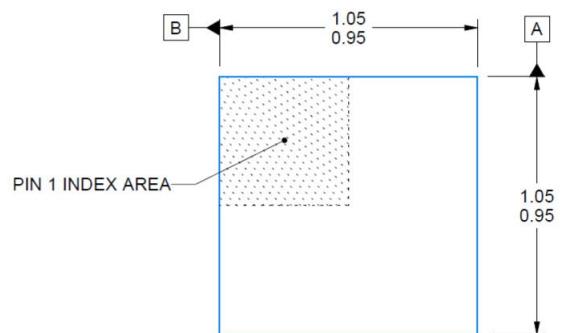




## YZP (DSBGA-5)

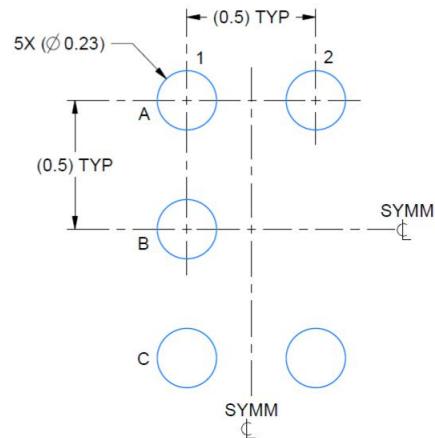

LAND PATTERN EXAMPLE  
SCALE:40X



DPW (X2SON-5)

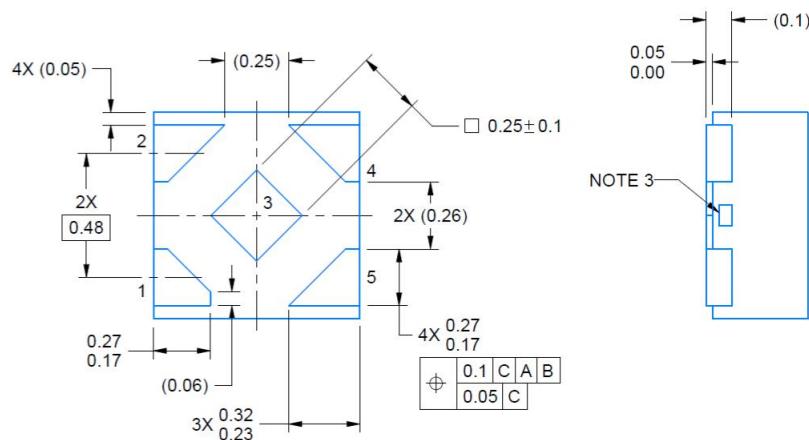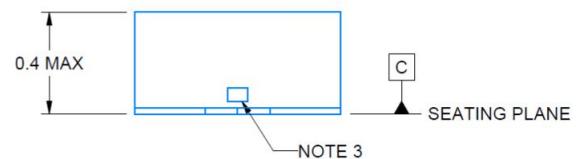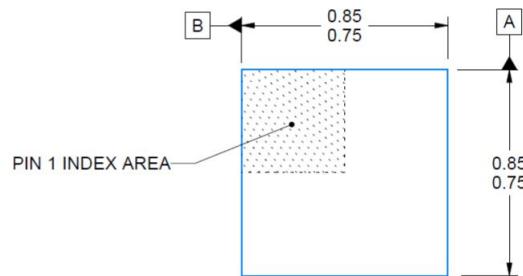

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Logic Gates category:***

***Click to view products by TWGMC manufacturer:***

Other Similar products are found below :

[74HC85N](#) [NL17SG08P5T5G](#) [NL17SG32DFT2G](#) [NLVHC1G08DFT1G](#) [CD4068BE](#) [TC7SET32FU\(T5L,JF\)](#) [NL17SG86DFT2G](#)  
[NLV14001UBDR2G](#) [NLX1G11AMUTCG](#) [NLX1G97MUTCG](#) [74LS38](#) [74LVC1G08Z-7](#) [74LVC32ADTR2G](#) [CD4025BE](#)  
[MC74HCT20ADTR2G](#) [NLV17SZ00DFT2G](#) [NLV17SZ02DFT2G](#) [NLV17SZ126DFT2G](#) [NLV27WZ17DFT2G](#) [NLV74HC02ADR2G](#)  
[74HC32S14-13](#) [74LS133](#) [74LVC1G32Z-7](#) [74LVC1G86Z-7](#) [NLV74HC14ADR2G](#) [NLV74HC20ADR2G](#) [NLX2G86MUTCG](#)  
[NLU1G00AMUTCG](#) [74LVC2G32RA3-7](#) [74LVC2G00HD4-7](#) [NL17SG02P5T5G](#) [74LVC2G86HK3-7](#) [NL17SG08DFT2G](#)  
[NLVVHC1G14DFT2G](#) [NLX1G99DMUTWG](#) [NLVX1G11AMUTCG](#) [NLVVHC1G00DFT2G](#) [NLV7SZ57DFT2G](#) [NLV74VHC04DTR2G](#)  
[NLV27WZ86USG](#) [NLV27WZ00USG](#) [NLU1G86CMUTCG](#) [NLU1G08CMUTCG](#) [NL17SZ32P5T5G](#) [NL17SZ00P5T5G](#) [NL17SH02P5T5G](#)  
[74AUP2G00RA3-7](#) [NLVVHC1GT00DFT2G](#) [NLV74HC02ADTR2G](#) [NLX1G332CMUTCG](#)