

SMD Oscillators CMOS Output 5.0 x 3.2 x 0.75 mm TB Series

Oscillators
 Series

Features


- Molded in plastic package
- Silicon-based MEMS oscillator
- Frequency range 1~150MHz
- High stability, low power consumption
- RoHS Compliant / Pb Free
- Main application : DSC, NB Computers, Computer Peripherals



Electrical Specifications

Item / Type	TB
Output Frequency Range	1~ 150MHz
Output Type	CMOS
Supply Voltage	1.8V, 2.5V, 3.3V
Frequency Stability	±25ppm
Operating Temperature Range	-40 ~ +85°C
Output Load	15pF Max.
Supply Current	25.0 mA Max.(1.0~ 60.0 MHz Vdd=3.3V)
	30.0 mA Max. (60.0~ 133.33 MHz Vdd=3.3V)
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD
Symmetry	45%~55% (1.0~ 100.0 MHz)
	40%~60% (100 ~ 200.0 MHz)
Rise / Fall Time	3 ns. Max.
Start-up Time	10msec Max.
Storage Temperature Range	-55 ~ +125°C

Dimensions

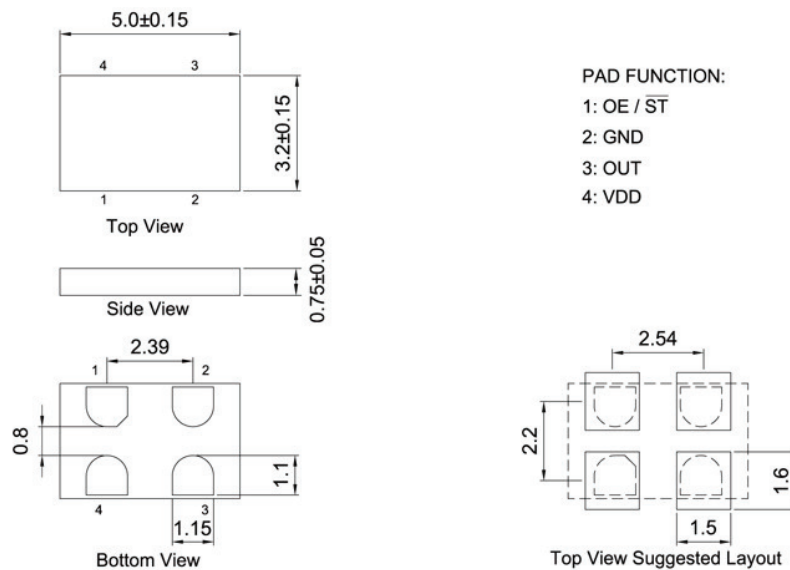

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [txc corporation](#) manufacturer:

Other Similar products are found below :

[7B-16.000MAAJ-T](#) [AM-12.000MAGE-T](#) [9HT10-32.768KAZF-T](#) [TC-100.000MBD-T](#) [AA-12.000MAGE-T](#) [9HT11-32.768KDZF-T](#) [9C-16.384MBBK-T](#) [AM-16.000MALE-T](#) [7A-12.000MAHE-T](#) [7C-8.000MBB-T](#) [7C-40.000MBE-T](#) [7X-25.000MBE-T](#) [7C-100.000MBE-T](#) [7V25000027](#) [7V24070002](#) [7V40050001](#) [8Y24000011](#) [8Y27100001](#) [OZ19270001](#) [AA-25.000MALE-T](#) [BF-100.000MBE-T](#) [9B-12.000MBBK-B](#) [8Z-12.000MEHE-T](#) [8Z24000012](#) [8Z-25.000MEEQ-T](#) [AS-8.000MAHK-B](#) [7A-27.120MAAE-T](#) [7W-20.000MBB-T](#) [7W-40.000MBE-T](#) [7M12010001](#) [AV-33.333MAGV-T](#) [AA-28.63636MAGK-T](#) [9B-25.000MEEJ-B](#) [7B-26.000MEEQ-T](#) [7M26000017](#) [7M25000024](#) [7C25000002](#) [AV16000004](#) [7A-28.63636MAAJ-T](#) [7W-12.000MBA-T](#) [AT-8.000MAGK-T](#) [7B-28.63636MAAJ-T](#) [8W-25.000MBE-T](#) [8W-40.000MBE-T](#) [7C-16.000MBE-T](#) [7M4005LCSC-EDE4S](#) [7A-20.000MAAJ-T](#) [9C-27.120MAAJ-T](#) [7X-33.333MBE-T](#) [7B14300001](#)