

Features

- ☒ Frequency range : 1MHz to 170MHz
- ☒ SMD seam sealing ceramic package
- ☒ Supply voltage : 1.8V ~ 3.3V
- ☒ CMOS output
- ☒ Tri-state function available
- ☒ External dimensions (mm)
L : 5.0 x W : 3.2 x H : 1.2
- ☒ RoHS compliant & Pb free

Applications

- ☒ Networking, Server, Storage
- ☒ Wireless communications
- ☒ Fibre channel, Ethernet, SATA, SAS, PCI-E, USB, WLAN, xDSL, xPON
- ☒ PC mainboard, Notebook, HDD, SSD, Graphics card, Computer peripherals
- ☒ Audio, Video, Gaming, Printer, DSC, IP CAM, Consumer products


Electrical Characteristics

Item	7C	Conditions
Frequency Range (F_0)	1MHz ~ 170MHz	
Frequency Stability (F_{stab})	± 50 , ± 25 ppm	-10°C ~ +70°C; Note [1]
	± 50 , ± 30 , ± 25 , ± 15 ppm	-40°C ~ +85°C; Note [1]
Operating Temperature Range (T_{OTR})	-10°C ~ +70°C	
	-40°C ~ +85°C	
Supply Voltage (V_{DD})	1.8V, 2.5V, 2.8V, 3.3V	$V_{DD} \pm 10\%$
Current Consumption (I_{DD})	10 mA Max.	1MHz ~ 75MHz
	20 mA Max.	75MHz ~ 170MHz
Output Type	CMOS	
Output Load (C_L)	15 pF	
Output Voltage High (V_{OH})	90% V_{DD} Min.	
Output Voltage Low (V_{OL})	10% V_{DD} Max.	
Rise & Fall Time (T_r / T_f)	8 ns Max.	10% ~ 90% of V_{DD}
Duty Cycle	40% ~ 60%	
Start-up Time	5 ms Max.	
Enable Voltage High, Logic "1"	70% V_{DD} Min.	Input to Pin1
Enable Voltage Low, Logic "0"	30% V_{DD} Max.	Note [2]
Phase Jitter, RMS	1 ps Max.	Note [3]
Aging (F_{aging})	± 3 ppm Max.	at 25°C ± 3 °C, first year
Storage Temperature Range (T_{STR})	-55°C ~ +125°C	

Notes:

- [1] Inclusive of frequency tolerance at 25°C, 1st year aging at 25°C, and variations over operating temperature, supply voltage, and load.
- [2] Output will be enabled if Pin1 is Logic "1" or open; Output will be disabled if Pin1 is Logic "0".
- [3] Freq. 10MHz~40MHz, integrated 12kHz~5MHz; Freq. >40MHz, integrated 12kHz~20MHz.

Dimensions

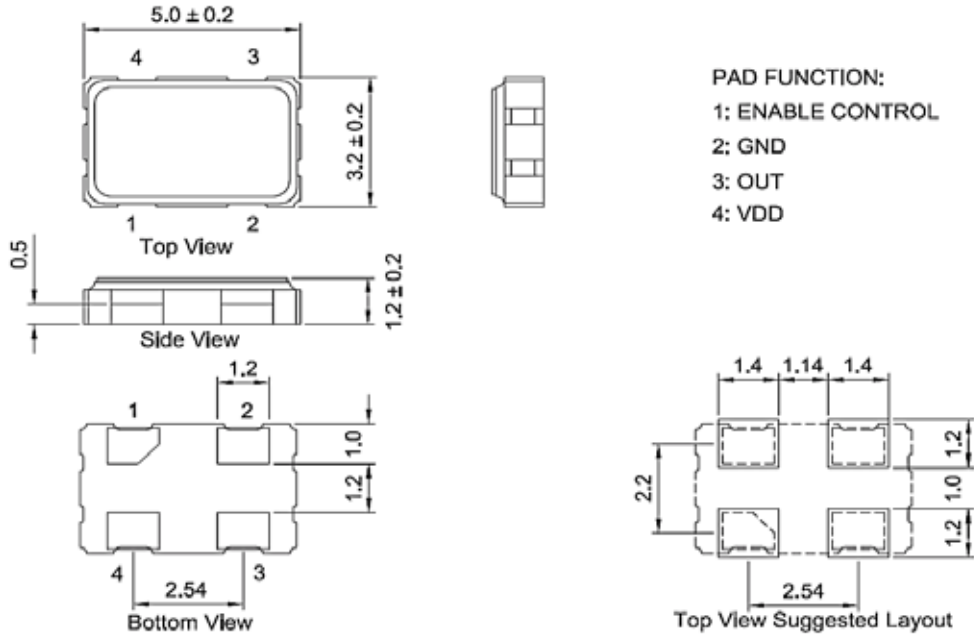

PAD FUNCTION:
 1: ENABLE CONTROL
 2: GND
 3: OUT
 4: VDD

(Unit: mm)

Ordering Information

B ± 50 ppm ($-10^{\circ}\text{C} \sim +85^{\circ}\text{C}$)
 C ± 100 ppm ($-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$)
 F ± 100 ppm ($-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$)

7C - 30.000M B B - T

Frequency in Hz
 Please contact us for available frequencies

Packaging Method
 T Tape & Reel


Supply Voltage

B	3.3 V
E	2.8 V
C	2.5 V
D	1.8 V

Frequency Stability


B	± 50 ppm ($-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$)
C	± 100 ppm ($-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$)
F	± 100 ppm ($-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$)

Packing

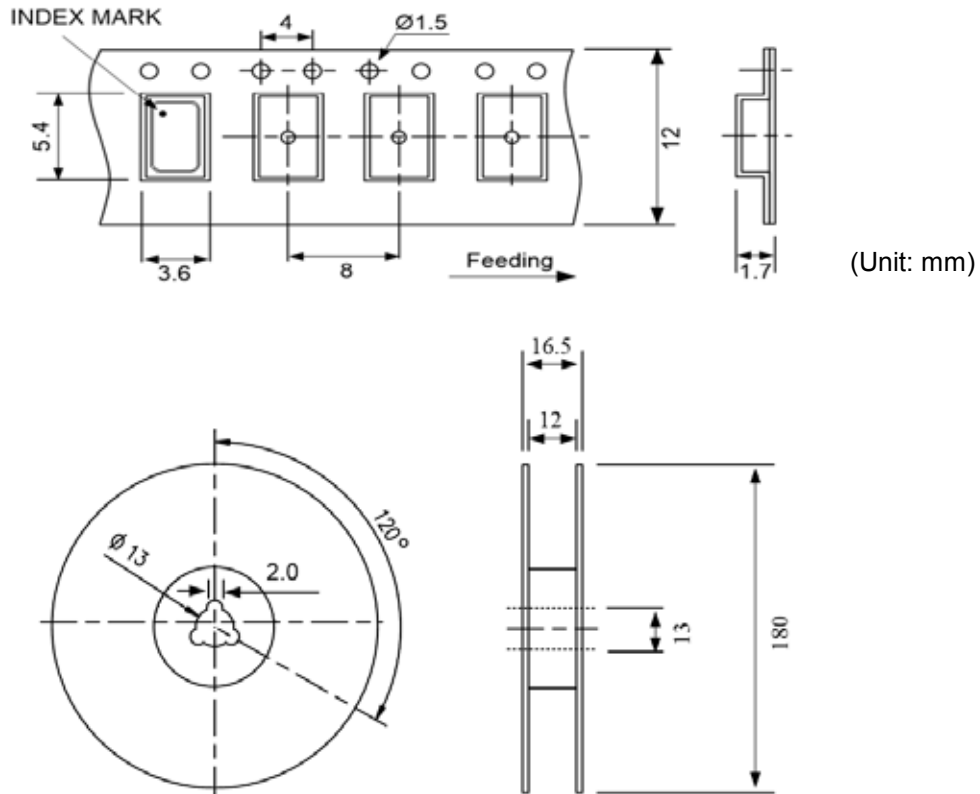

Reflow Profile

Solder melting point : 220°C ± 10°C, 60 sec. Min.
 Peak temperature : 260°C ± 10°C, 10 sec. Min.

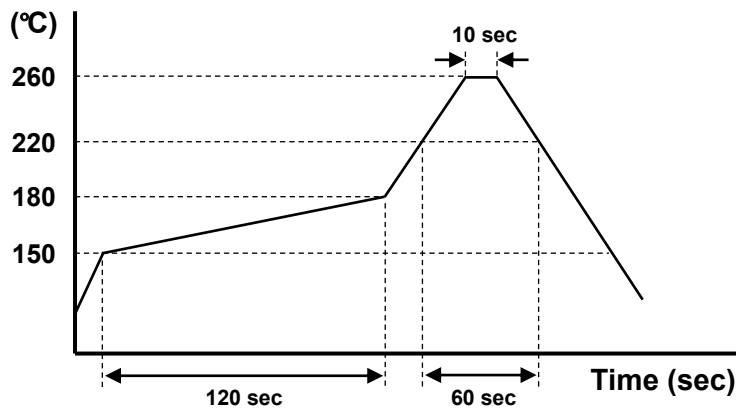

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [TXC Corporation](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#)
[XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#)