

SMD Temperature Compensated Crystal Oscillators 3.2 x 2.5 x 1.0 mm 7Q Series

Oscillators
 Series

Features


- Temperature Stability: $\pm 0.5 \text{ ppm} \sim \pm 2.0 \text{ ppm}$
- Operating Temperature Range: $-30 \text{ }^\circ\text{C} \sim 85 \text{ }^\circ\text{C}$
- Supply Voltage: $1.8 \text{ V} \sim 3.3 \text{ V}$
- Voltage Control Function Available
- Frequencies: 16.367667 MHz, 16.368 MHz, 16.369 MHz, 16.8 MHz, 19.2 MHz, 20 MHz, 26 MHz, 33.6 MHz, 38.4 MHz, 40 MHz
- Applications: GPS, WiMAX, Cellular and Wireless Communications
- RoHS Compliant / Pb Free



Electrical Specifications

Item / Type		7Q
Output Type		Clipped Sinewave
Output Load		10K Ω // 10 pF
Oscillation Mode		Fundamental
Supply Voltage		1.8 ~ 3.3 V
Frequency Range		13 ~ 52 MHz
Clipped Sinewave Output Voltage		0.8 V _{p-p} typical
Frequency Stability	Vs. Temperature ($-30 \sim +85 \text{ }^\circ\text{C}$)	$\pm 0.5 / \pm 2.0 \text{ ppm}$
	Vs. Load (Load varies $\pm 10 \%$)	$\pm 0.2 \text{ ppm Max.}$
	Vs. Supply Voltage ($V_{cc} = \text{Typical} \pm 0.1 \text{ V}$)	$\pm 0.2 \text{ ppm Max.}$
Frequency Tolerance	at 25 $^\circ\text{C}$ after 2 Reflows with Typical Applied to Auto Frequency Control Pin	$\pm 2.5 \text{ ppm Max.}$
Slope of Frequency Drift		$\pm 0.1 \text{ ppm / }^\circ\text{C}$ Typical ; $\pm 0.5 \text{ ppm / }^\circ\text{C}$ Max.
Storage Temperature Range		$-40 \sim +85 \text{ }^\circ\text{C}$
Auto Frequency Control (AFC) Range (Center @ 1.4 V)		$\pm 7 \sim \pm 16 \text{ ppm / V}$
Supply Current		2.0 mA Max.
Start-up Time		5 ms Max.
Harmonics		- 5 dBc Max.
Phase Noise at 1 KHz offset		- 130 dBc / Hz
Aging (at 25 $^\circ\text{C}$)		$\pm 1 \text{ ppm / year Max.}$

Dimensions

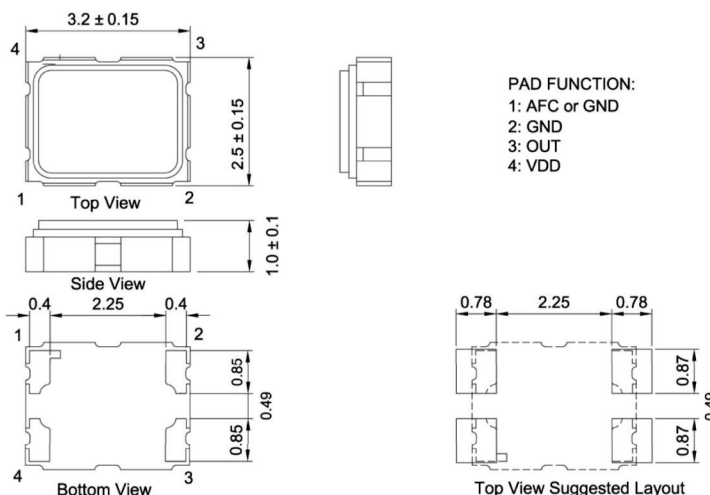

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCVCXO Oscillators](#) category:

Click to view products by [TXC Corporation](#) manufacturer:

Other Similar products are found below :

[FOX923CH-19.20M](#) [TG-5006CG-12H 26.0000M3](#) [TG-5035CG-13N 19.2000M3](#) [SIT5000ACC8E-33VQ-19.200000X](#) [TG5032SGN](#)
[40.0000M-CBGHNAB](#) [LFTVXO022175Bulk](#) [KT7050A10000KAW33TAD](#) [MAOC-009266-PKG003](#) [ASVTX-09-19.200MHZ-T](#)
[SiT5000AICGE-33E0-25.000000X](#) [LFTVXO075674CUTT](#) [ASVTX-12-C-19.200MHz-I15-T](#) [LFTVXO075803Cutt](#) [LFTVXO076348CUTT](#)
[LFTVXO075802Cutt](#) [LFTVXO076344CUTT](#) [KT2016K40000DAZ18TAV](#) [KT2016K27600ZAW18TCS](#) [LFTVXO076343CUTT](#)
[LFTVXO073010Cutt](#) [LFTVXO072344CUTT](#) [LFTVXO073008Cutt](#) [LFTVXO076347CUTT](#) [LFTVXO076349CUTT](#) [LFTVXO076194CUTT](#)
[ASVTX-09-20.000MHz-T](#) [KT1612A26000ACW28TAN](#) [LFTVXO009901BULK](#) [ASGTX-C-100.000MHz-1](#) [ASGTX-C-120.000MHz-1](#)
[ASGTX-D-100.000MHz-1](#) [ASGTX-D-1.000GHz-1](#) [ASGTX-D-125.000MHz-1](#) [ASGTX-D-1.2890625GHz-1](#) [ASGTX-D-500.000MHz-1](#)
[ASGTX-P-1.000GHz-1](#) [ASGTX-P-1.500GHz-1](#) [ASGTX-P-500.000MHz-2](#) [ASGTX-D-1.000GHZ-2](#) [ASVTX-09-14.400MHZ-T](#) [ASVTX-09-](#)
[16.000MHZ-T](#) [ASVTX-09-16.800MHZ-T](#) [ASVTX-11-A-38.400MHz-T](#) [ASVTX-12-A-19.200MHZ-H10-T](#) [ASVTX-12-D-16.369MHz-I05-T](#)
[ASVTX-12-D-19.200MHz-I05-T](#) [ASVTX-13-C-16.369MHz-I05-T](#) [ASVTX-13-C-19.200MHz-I05-T](#) [ASVTX-13-C-26.000MHz-I05-T](#)
[ASVTX-13-C-26.000MHz-I15-T](#)