
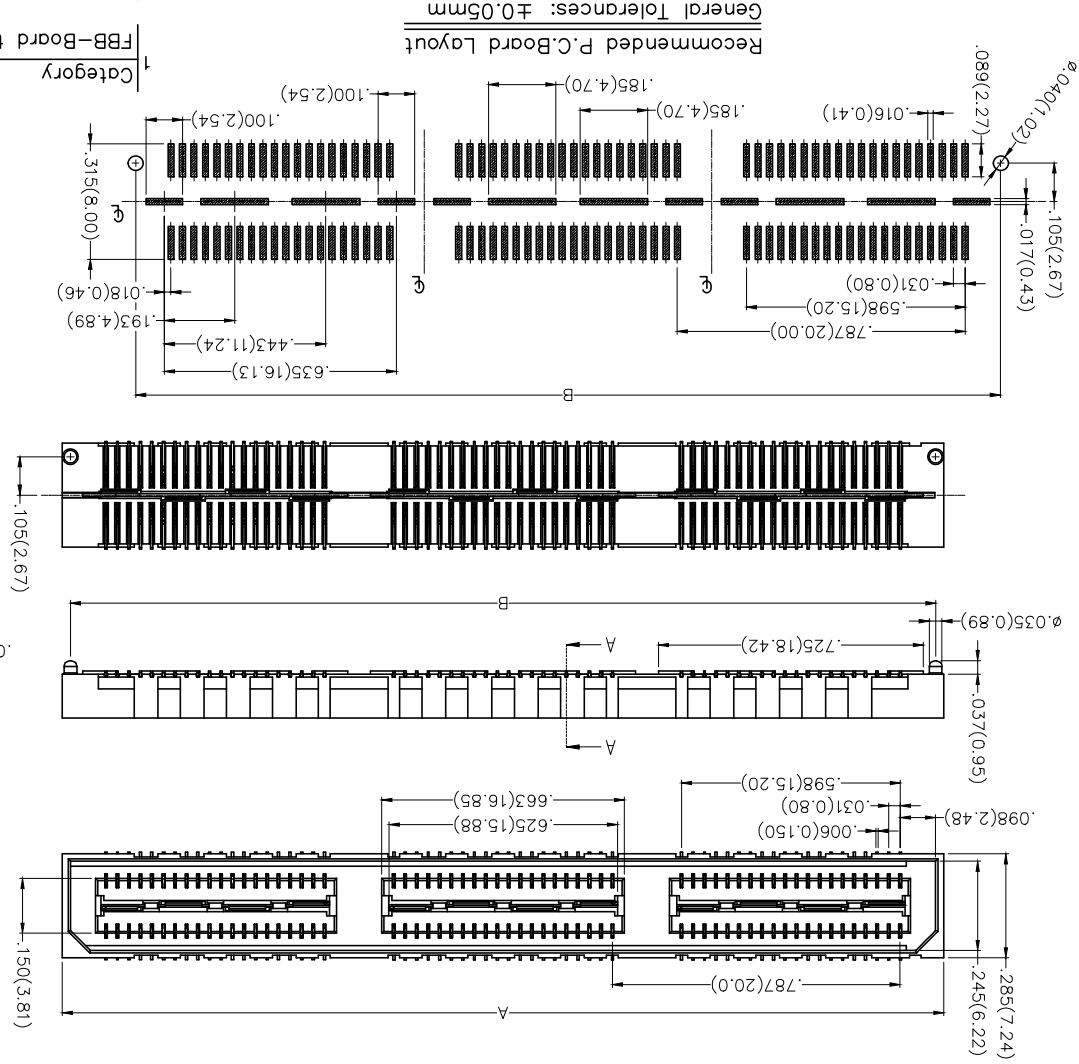


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current Rating: 2.0A(Circuits), 16A(Ground)
 (One pin power per row)
 Voltage Rating: 225V AC(rms)/DC
 Contact Resistance: 15 mΩ Max.
 Insulation Resistance: 5000 MΩ Min.
 Withstanding Voltage: 675V AC r.m.s
 Temperature Range—Operating: -55°C~+85°C
Material and Plating
 Housing: LCP (UL 94V-0)
 Contacts: Phosphor Bronze/ Selective gold in
 contact area, matte tin on tail

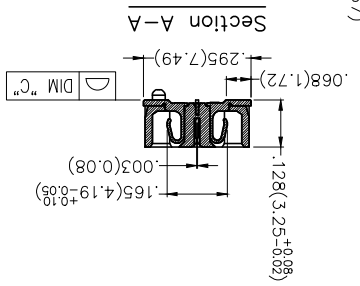

Recommended P.C.Board Layout
 General Tolerances: ±0.05mm

Ordering Information

1 Category
 2 Series Number
 3 Distinction No.
 4 Type
 5 Circuits
 6 Entry Angle
 7 Plating
 8 Thickness of Plating
 9 Material—Resin
 10 Color—Resin
 11 Packaging

Circuits (n)	Part No.		Dimensions(in/mm)	
	A	B	C	
40	FBB08004-F40S3XX3K6M	.838(21.28)	.793(20.13)	.004(0.10)
80	FBB08004-F80S3XX3K6M	1.625(41.28)	1.580(40.13)	.004(0.10)
120	FBB08004-F120S3XX3K6M	2.413(61.28)	2.367(60.13)	.006(0.15)

THIRD ANGLE PROJECTION	DESIGN UNITS Inch (metric)	SCALE 5:1	A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		DATE	APPROVE BY	DATE	PART NO.	ITEM NO.	TITLE	Board to Board Pitch 0.8mm 180° Vertical (SMT)		REV 0	SHEET NO. 1/1
				X.F.±0.12(0.30)	X.F.±0.08(0.20)							DATE	DRAWN BY		
				X.F.±0.04(0.10)	X.F.±0.04(0.10)	21/DEC/18	FRANK	21/DEC/18	FBB08004-FXXS3XX3K6M	FBB08004	Leader Of Industry	Color—Resin	M—Reel		
				X.F.±0.05	X.F.±0.05	21/DEC/18	KATE	21/DEC/18			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(SZ)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	Material—Resin			



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-20P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#)