
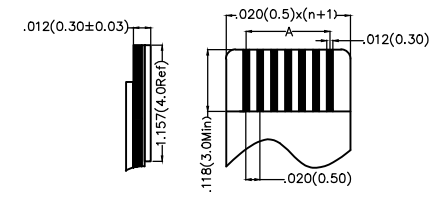
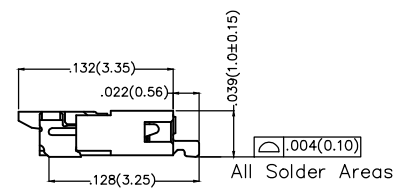
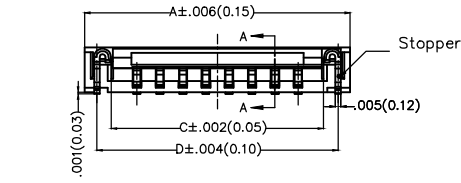




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current Rating: 0.5A AC(rms)/DC
 Voltage Rating: 50V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Withstanding Voltage: 200V AC/Minute
 Temperature Range-Operating: -25°C~+85°C
 Material and Plating
 Housing: Heat Resistant Polymer UL 94V-0
 Actuator: Heat Resistant Polymer UL 94V-0
 Contact: Phosphor Bronze/ Gold or Tin Plated
 Stopper: Phosphor Bronze/ Tin Plated

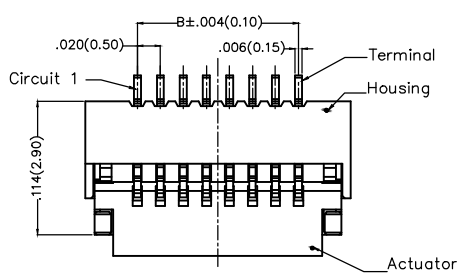

Applicable FFC Recommended Dimension

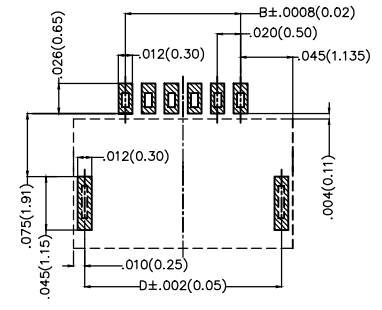

Recommended P.C.Board Layout

Ordering Information

FFC 050 13 — XX S B B 1 X 4 W5 M
 1 2 3 4 5 6 7 8 9 10 11 12

1 Category FFC-FPC	2 Series Number 050-Pitch0.50mm	3 Distinction No. 13	4 Circuits XX	5 Assemble Layout S-SMT	6 Entry Angle B- 90° Angle
7 Contact Position B-Bottom	8 ZIF 1-ZIF	9 Plating 1-Gold Plated 2-Tin Plated	10 Material-Resin 4-LCP	11 Color-Resin W5-Housing: Natural, Actuator: Black	12 Packaging M-Reel

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED) X.±.012(0.30) X.±5° X.XX±.008(0.20) .X'±2° X.XX±.006(0.15) .XX'±1° X.XXX±.004(0.10) .XXX'±0.5°		APPROVE BY FRANK CHECKED BY JACOB DRAWN BY CHERRY	DATE 18/JUN/13 DATE 18/JUN/13 DATE 18/JUN/13	PART NO. FFC05013-XXSBB1X4W5M TITLE FPC/FFC connector 0.5mm Bottom contact SMT	ITEM NO. FFC05013	 Leader Of Industry
					REV 0 SHEET NO. 1/3		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note: Contact Gold Plated

Circuits (n)	Part No.	Dimensions(in/mm)			
		A	B	C	D
4	FFC05013-04SBB114W5M	.148(3.77)	.059(1.50)	.102(2.60)	.128(3.27)
5	FFC05013-05SBB114W5M	.168(4.27)	.079(2.00)	.122(3.10)	.148(3.77)
6	FFC05013-06SBB114W5M	.188(4.77)	.098(2.50)	.142(3.60)	.168(4.27)
8	FFC05013-08SBB114W5M	.227(5.77)	.138(3.50)	.181(4.60)	.207(5.27)
9	FFC05013-09SBB114W5M	.247(6.27)	.157(4.00)	.200(5.10)	.227(5.77)
10	FFC05013-10SBB114W5M	.267(6.77)	.177(4.50)	.220(5.60)	.247(6.27)
12	FFC05013-12SBB114W5M	.306(7.77)	.217(5.50)	.260(6.60)	.286(7.27)
14	FFC05013-14SBB114W5M	.345(8.77)	.256(6.50)	.299(7.60)	.326(8.27)
16	FFC05013-16SBB114W5M	.385(9.77)	.295(7.50)	.339(8.60)	.748(9.27)
18	FFC05013-18SBB114W5M	.424(10.77)	.335(8.50)	.378(9.60)	.404(10.27)
20	FFC05013-20SBB114W5M	.463(11.77)	.374(9.50)	.417(10.60)	.444(11.27)
24	FFC05013-24SBB114W5M	.542(13.77)	.453(11.50)	.496(12.60)	.522(13.27)
30	FFC05013-30SBB114W5M	.660(16.77)	.571(14.50)	.614(15.60)	.641(16.27)
40	FFC05013-40SBB114W5M	.857(21.77)	.768(19.50)	.811(20.60)	.837(21.27)

Note: Contact Tin Plated

Circuits (n)	Part No.	Dimensions(in/mm)			
		A	B	C	D
4	FFC05013-04SBB124W5M	.148(3.77)	.059(1.50)	.102(2.60)	.128(3.27)
5	FFC05013-05SBB124W5M	.168(4.27)	.079(2.00)	.122(3.10)	.148(3.77)
6	FFC05013-06SBB124W5M	.188(4.77)	.098(2.50)	.142(3.60)	.168(4.27)
8	FFC05013-08SBB124W5M	.227(5.77)	.138(3.50)	.181(4.60)	.207(5.27)
9	FFC05013-09SBB124W5M	.247(6.27)	.157(4.00)	.200(5.10)	.227(5.77)
10	FFC05013-10SBB124W5M	.267(6.77)	.177(4.50)	.220(5.60)	.247(6.27)
12	FFC05013-12SBB124W5M	.306(7.77)	.217(5.50)	.260(6.60)	.286(7.27)
14	FFC05013-14SBB124W5M	.345(8.77)	.256(6.50)	.299(7.60)	.326(8.27)
16	FFC05013-16SBB124W5M	.385(9.77)	.295(7.50)	.339(8.60)	.748(9.27)
18	FFC05013-18SBB124W5M	.424(10.77)	.335(8.50)	.378(9.60)	.404(10.27)
20	FFC05013-20SBB124W5M	.463(11.77)	.374(9.50)	.417(10.60)	.444(11.27)
24	FFC05013-24SBB124W5M	.542(13.77)	.453(11.50)	.496(12.60)	.522(13.27)
30	FFC05013-30SBB124W5M	.660(16.77)	.571(14.50)	.614(15.60)	.641(16.27)
40	FFC05013-40SBB124W5M	.857(21.77)	.768(19.50)	.811(20.60)	.837(21.27)





 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	18/JUN/13	FFC05013-XXSBB1X4W5M	FFC05013	
DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	X.±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE	X.XX±.006(0.15)	.XX±1'	JACOB	18/JUN/13	FFC/FFC connector 0.5mm Bottom contact SMT		
5:1	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
A4			CHERRY	18/JUN/13			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

- 10 sprocket hole cumulative tolerance ± 0.2
- Carrier camber is within 1.0mm in 250mm
- Material: White Conductive polystyrene Alloy 100% recyclable
- All dimensions meet EIA-481-3 requirements
- Peel off force of cover tape & carrier tape: 20g~130g (0.2N~1.3N)
- Component load per 13" reel: 5,000 pcs

Circuits (n)	Dimensions (in/mm)	
	A	B
4~22	.630(16.0)	.295(7.5)
24~30	.945(24.0)	.453(11.5)
40	1.260(32.0)	.561(14.25)

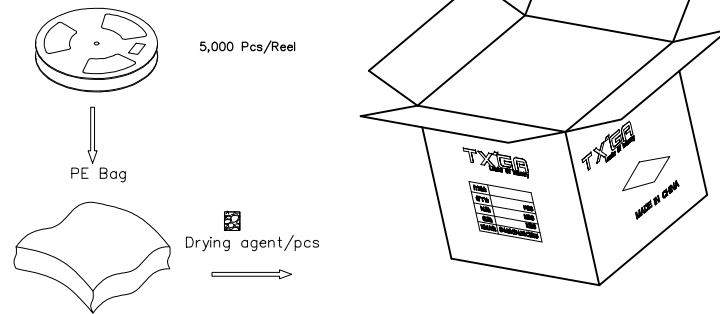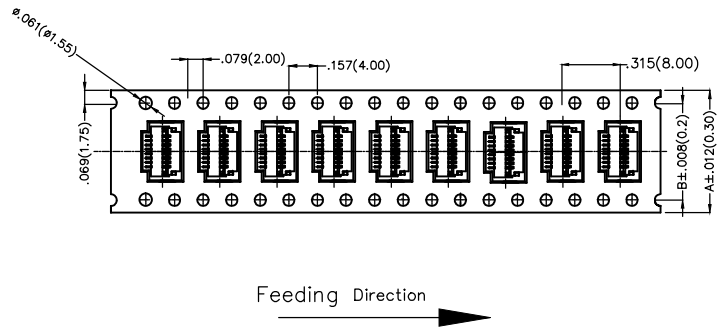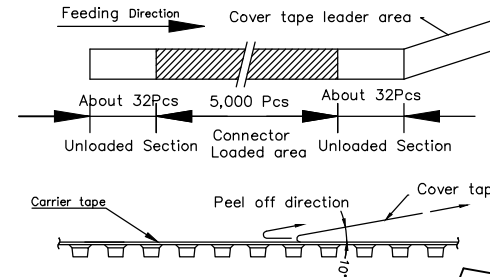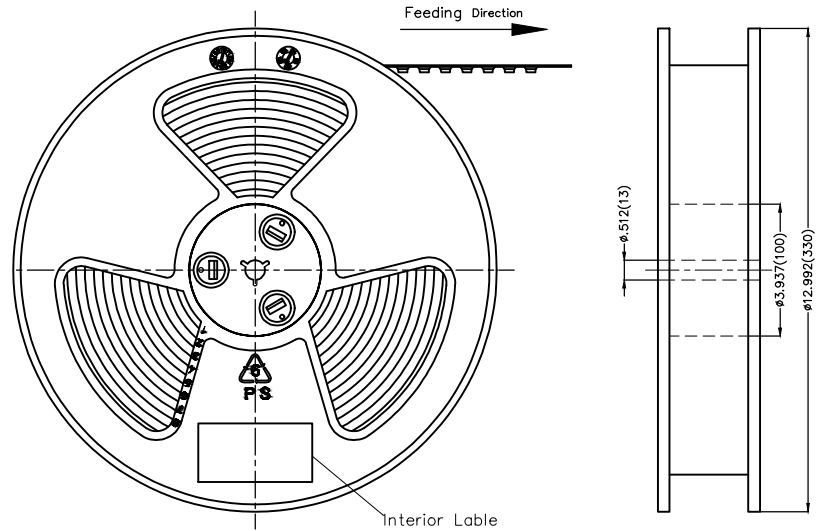

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED) $X \pm .012(0.30)$ $X \pm 5'$ $X.X \pm .008(0.20)$ $X \pm 2'$ $X.XX \pm .006(0.15)$ $.XX \pm 1'$ $X.XXX \pm .004(0.10)$ $.XXX \pm 0.5'$		APPROVE BY FRANK CHECKED BY JACOB DRAWN BY CHERRY	DATE 18/JUN/13 DATE 18/JUN/13 DATE 18/JUN/13	PART NO. FFC05013-XXSBB1X4W5M TITLE FPC/FFC connector 0.5mm Bottom contact SMT	ITEM NO. FFC05013	 Leader Of Industry REV 0 SHEET NO. 3/3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)