


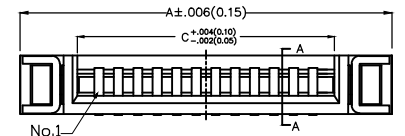


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical
 Current Rating: 0.5A AC(rms)/DC
 Voltage Rating: 50V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 200V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C


Material
 Housing: Heat Resistant Polymer UL94V-0
 Actuator: Heat Resistant Polymer UL94V-0
 Contact: Phosphor Bronze/Tin Plated/Gold Plated
 Stopper: Copper Alloy/Tin Plated/Gold Plated

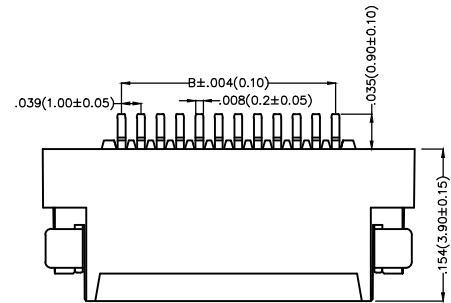

Section A-A

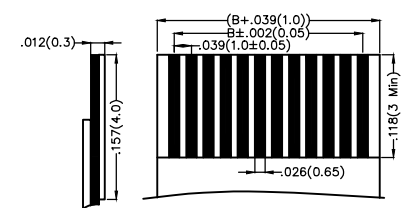

Applicable FFC Recommended Dimension

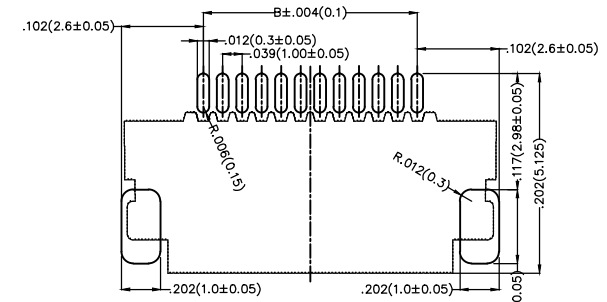


Recommended P.C.Board Layout

Ordering Information



FFC 100 22 — XX S B D 2 2 4 W5 M
 1 2 3 4 5 6 7 8 9 10 11 12

1 Category FFC-FPC	2 Series Number 100-Pitch1.00mm	3 Distinction No. 22	4 Circuits XX	5 Assemble Layout S-SMT	6 Entry Angle B-90° Angle
7 Contact Point D-Double Contact	8 ZIF 2-NON ZIF	9 Plating 2-Tin Plated	10 Material-Resin 4-PA9T	11 Color-Resin W5-White	12 Packaging M-Reel

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 5/JUL/13	PART NO. FFC10022-XXSBD224W5M	ITEM NO. FFC10022	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.±5'	CHECKED BY CHERRY	DATE 5/JUL/13	TITLE FPC/FFC Connector 1.00mm Double Contact SMT		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX±1'	DRAWN BY JACOB	DATE 5/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX±.004(0.10) .XXX±0.5'					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		
		A	B	C
4	FFC10022-04SBD224W5M	.316(8.03)	.118(3.00)	.200(5.07)
5	FFC10022-05SBD224W5M	.356(9.03)	.157(4.00)	.239(6.07)
6	FFC10022-06SBD224W5M	.395(10.03)	.197(5.00)	.278(7.07)
8	FFC10022-08SBD224W5M	.474(12.03)	.276(7.00)	.357(9.07)
10	FFC10022-10SBD224W5M	.552(14.03)	.354(9.00)	.436(11.07)
12	FFC10022-12SBD224W5M	.631(16.03)	.433(11.00)	.515(13.07)
18	FFC10022-18SBD224W5M	.867(22.03)	.669(17.00)	.751(19.07)
24	FFC10022-24SBD224W5M	1.104(28.03)	.906(23.00)	.987(25.07)
28	FFC10022-28SBD224W5M	1.261(32.03)	1.063(27.00)	1.144(29.07)






 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 5/JUL/13	PART NO. FFC10022-XXSBD224W5M	ITEM NO. FFC10022	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5' .X±2' .XX±1' .XXX±0.5'	CHECKED BY CHERRY	DATE 5/JUL/13	TITLE FPC/FFC Connector 1.00mm Double Contact SMT	
SCALE 5:1	SIZE A4	DRAWN BY JACOB		DATE 5/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

- 10 sprocket hole cumulative tolerance±0.2
- Carrier camber is within 1.0mm in 250mm
- Material: White Conductive polystyrene Alloy 100% recyclable
- All dimensions meet EIA-481-3 requirements
- Peel off force of cover tape&carrier tape: 20g~130g(0.2N~1.3N)
- Component load per 13" reel: 2,500 pcs

Circuits (n)	Dimensions(in./mm)		
	A	B	C
4~9	.945(24.0)	.453(11.5)	—
10~16	1.260(32.0)	.561(14.25)	1.033(28.50)
17~28	1.732(44.0)	.797(20.25)	1.594(40.50)

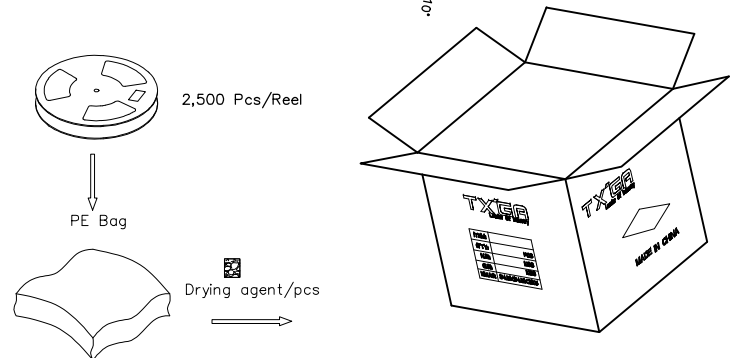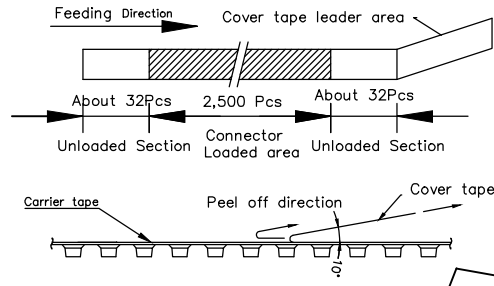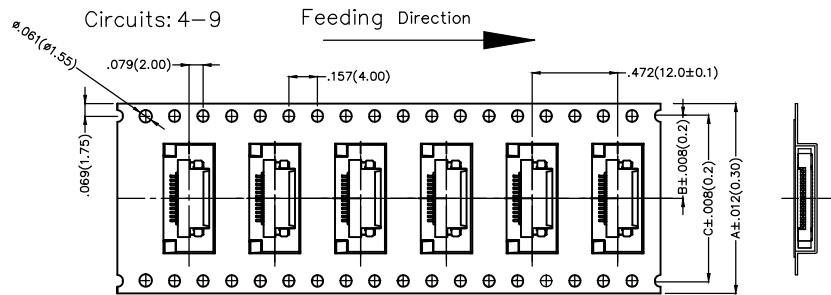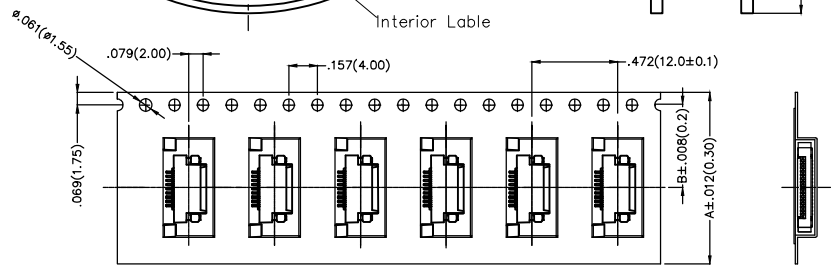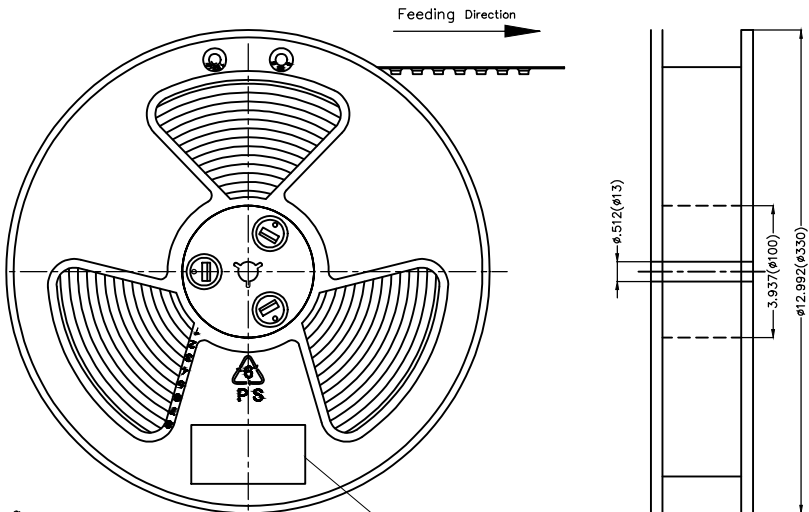

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	18/JUN/13	FFC10022-XXSBD224W5M	FFC10022	
	X.X±.008(0.20)	.X±2"	CHECKED BY	DATE	TITLE		
	X.XX±.006(0.15)	.XX±1'	JACOB	18/JUN/13	FFC/FFC Connector 1.00mm		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			CHERRY	18/JUN/13	REV 0	SHEET NO. 3/3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [PCA-7F-25-HL-3-G](#) [207356-1](#) [52807-0430](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [FH28K-40S-0.5SH](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [501951-1250](#) [X05B20U43T](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [20539-030E-01](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#) [HFW20R-1STAE1HLF](#)