





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range-Operating: -40°C~+105°C

Material and Plating

Housing: PBT/PA6T(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold in contact area, matte(bright) tin on tail

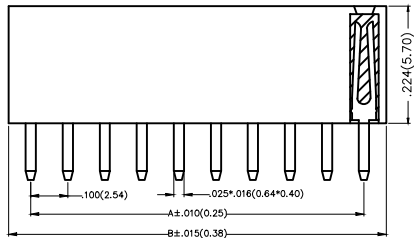

Recommended P.C.Board Layout

Ordering Information



FFH 254 01 — S XX S X XX X K6 K
1 2 3 4 5 6 7 8 9 10 11

1 Category FFH-Female Header	2 Series Number 254-Pitch2.54mm	3 Distinction No. 01	4 Row Option S-Single row	5 Circuits XX	6 Entry Angle S-180° Vertical
7 Plating 1-Gold Plated 3-Selective gold in contact area, matte(bright) tin on tail	8 Thickness of Plating 00-Gold Flash 05-5μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 Color-Resin K6-Black	11 Packaging K-Tray	

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/AUG/13	PART NO. FFH25401-SXXSXXXK6K	ITEM NO. FFH25401	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5" X.±2" .XX±1" .XXX±0.5"	CHECKED BY CHERRY	DATE 12/AUG/13	TITLE Board to Board (Female Header) Pitch 2.54mm 180° Vertical (DIP)		REV 0
SCALE 5:1	SIZE A4	DRAWN BY JACOB		DATE 12/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
2	FFH25401-S02SXXXXK6K	.100(2.54)	.220(5.58)	22	FFH25401-S22SXXXXK6K	2.100(53.34)	2.220(56.38)
3	FFH25401-S03SXXXXK6K	.200(5.08)	.320(8.12)	23	FFH25401-S23SXXXXK6K	2.200(55.88)	2.320(58.92)
4	FFH25401-S04SXXXXK6K	.300(7.62)	.420(10.66)	24	FFH25401-S24SXXXXK6K	2.300(58.42)	2.420(61.46)
5	FFH25401-S05SXXXXK6K	.400(10.16)	.520(13.20)	25	FFH25401-S25SXXXXK6K	2.400(60.96)	2.520(64.00)
6	FFH25401-S06SXXXXK6K	.500(12.70)	.620(15.74)	26	FFH25401-S26SXXXXK6K	2.500(63.50)	2.620(66.54)
7	FFH25401-S07SXXXXK6K	.600(15.24)	.720(18.28)	27	FFH25401-S27SXXXXK6K	2.600(66.04)	2.720(69.08)
8	FFH25401-S08SXXXXK6K	.700(17.78)	.820(20.82)	28	FFH25401-S28SXXXXK6K	2.700(68.58)	2.820(71.62)
9	FFH25401-S09SXXXXK6K	.800(20.32)	.920(23.36)	29	FFH25401-S29SXXXXK6K	2.800(71.12)	2.920(74.16)
10	FFH25401-S10SXXXXK6K	.900(22.86)	1.020(25.90)	30	FFH25401-S30SXXXXK6K	2.900(73.66)	3.020(76.70)
11	FFH25401-S11SXXXXK6K	1.000(25.40)	1.120(28.44)	31	FFH25401-S31SXXXXK6K	3.000(76.20)	3.120(79.24)
12	FFH25401-S12SXXXXK6K	1.100(27.94)	1.220(30.98)	32	FFH25401-S32SXXXXK6K	3.100(78.74)	3.220(81.78)
13	FFH25401-S13SXXXXK6K	1.200(30.48)	1.320(33.52)	33	FFH25401-S33SXXXXK6K	3.200(81.28)	3.320(84.32)
14	FFH25401-S14SXXXXK6K	1.300(33.02)	1.420(36.06)	34	FFH25401-S34SXXXXK6K	3.300(83.82)	3.420(86.86)
15	FFH25401-S15SXXXXK6K	1.400(35.56)	1.520(38.60)	35	FFH25401-S35SXXXXK6K	3.400(86.36)	3.520(89.40)
16	FFH25401-S16SXXXXK6K	1.500(38.10)	1.620(41.14)	36	FFH25401-S36SXXXXK6K	3.500(88.90)	3.620(91.94)
17	FFH25401-S17SXXXXK6K	1.600(40.64)	1.720(43.68)	37	FFH25401-S37SXXXXK6K	3.600(91.44)	3.720(94.48)
18	FFH25401-S18SXXXXK6K	1.700(43.18)	1.820(46.22)	38	FFH25401-S38SXXXXK6K	3.700(93.98)	3.820(97.02)
19	FFH25401-S19SXXXXK6K	1.800(45.72)	1.920(48.76)	39	FFH25401-S39SXXXXK6K	3.800(96.52)	3.920(99.56)
20	FFH25401-S20SXXXXK6K	1.900(48.26)	2.020(51.30)	40	FFH25401-S40SXXXXK6K	3.900(99.06)	4.020(102.10)
21	FFH25401-S21SXXXXK6K	2.000(50.80)	2.120(53.84)				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/AUG/13	PART NO. FFH25401-SXXSXXXXK6K	ITEM NO. FFH25401	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.XX±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 12/AUG/13	TITLE Board to Board (Female Header) Pitch 2.54mm 180° Vertical (DIP)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	X.XX±1'	DRAWN BY JACOB	DATE 12/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX±.004(0.10)	.XXX±0.5'					




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -40°C~+105°C

Material and Plating


Housing: PBT/PA6T(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold in contact area,
matte(bright) tin on tail

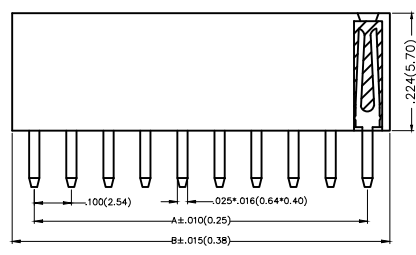

Ordering Information

FFH 254 01 — D XX S X XX X K6 K
1 2 3 4 5 6 7 8 9 10 11

1 <u>Category</u> FFH—Female Header	2 <u>Series Number</u> 254—Pitch 2.54mm	3 <u>Distinction No.</u> 01	4 <u>Row Option</u> D—Double Row	5 <u>Circuits</u> XX	6 <u>Entry Angle</u> S—180° Vertical
7 <u>Plating</u> 1—Gold Plated 3—Selective gold in contact area, matte(bright) tin on tail	8 <u>Thickness of Plating</u> 00—Gold Flash 05—5μ" Custom plate available	9 <u>Material—Resin</u> 1—PBT 4—PA6T	10 <u>Color—Resin</u> K6—Black	11 <u>Packaging</u> K—Tray	





Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/AUG/13	PART NO. FFH25401—DXXSXXXK6K	ITEM NO. FFH25401	 Leader Of Industry
	X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 12/AUG/13	TITLE Board to Board (Female Header) Pitch 2.54mm 180° Vertical (DIP)		
DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2°	DRAWN BY JACOB	DATE 12/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z.)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)					
		X.XXX±.004(0.10)					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
4	FFH25401-D04SXXXXK6K	.100(2.54)	.220(5.58)	44	FFH25401-D44S1XXXXK6K	2.100(53.34)	2.220(56.38)
6	FFH25401-D06SXXXXK6K	.200(5.08)	.320(8.12)	46	FFH25401-D46S1XXXXK6K	2.200(55.88)	2.320(58.92)
8	FFH25401-D08SXXXXK6K	.300(7.62)	.420(10.66)	48	FFH25401-D48S1XXXXK6K	2.300(58.42)	2.420(61.46)
10	FFH25401-D10SXXXXK6K	.400(10.16)	.520(13.20)	50	FFH25401-D50S1XXXXK6K	2.400(60.96)	2.520(64.00)
12	FFH25401-D12SXXXXK6K	.500(12.70)	.620(15.74)	52	FFH25401-D52S1XXXXK6K	2.500(63.50)	2.620(66.54)
14	FFH25401-D14SXXXXK6K	.600(15.24)	.720(18.28)	54	FFH25401-D54S1XXXXK6K	2.600(66.04)	2.720(69.08)
16	FFH25401-D16SXXXXK6K	.700(17.78)	.820(20.82)	56	FFH25401-D56S1XXXXK6K	2.700(68.58)	2.820(71.62)
18	FFH25401-D18SXXXXK6K	.800(20.32)	.920(23.36)	58	FFH25401-D58S1XXXXK6K	2.800(71.12)	2.920(74.16)
20	FFH25401-D20SXXXXK6K	.900(22.86)	1.020(25.90)	60	FFH25401-D60S1XXXXK6K	2.900(73.66)	3.020(76.70)
22	FFH25401-D22SXXXXK6K	1.000(25.40)	1.120(28.44)	62	FFH25401-D62S1XXXXK6K	3.000(76.20)	3.120(79.24)
24	FFH25401-D24SXXXXK6K	1.100(27.94)	1.220(30.98)	64	FFH25401-D64S1XXXXK6K	3.100(78.74)	3.220(81.78)
26	FFH25401-D26SXXXXK6K	1.200(30.48)	1.320(33.52)	66	FFH25401-D66S1XXXXK6K	3.200(81.28)	3.320(84.32)
28	FFH25401-D28SXXXXK6K	1.300(33.02)	1.420(36.06)	68	FFH25401-D68S1XXXXK6K	3.300(83.82)	3.420(86.86)
30	FFH25401-D30SXXXXK6K	1.400(35.56)	1.520(38.60)	70	FFH25401-D70S1XXXXK6K	3.400(86.36)	3.520(89.40)
32	FFH25401-D32SXXXXK6K	1.500(38.10)	1.620(41.14)	72	FFH25401-D72S1XXXXK6K	3.500(88.90)	3.620(91.94)
34	FFH25401-D34SXXXXK6K	1.600(40.64)	1.720(43.68)	74	FFH25401-D74S1XXXXK6K	3.600(91.44)	3.720(94.48)
36	FFH25401-D36S1XXXXK6K	1.700(43.18)	1.820(46.22)	76	FFH25401-D76S1XXXXK6K	3.700(93.98)	3.820(97.02)
38	FFH25401-D38S1XXXXK6K	1.800(45.72)	1.920(48.76)	78	FFH25401-D78S1XXXXK6K	3.800(96.52)	3.920(99.56)
40	FFH25401-D40S1XXXXK6K	1.900(48.26)	2.020(51.30)	80	FFH25401-D80S1XXXXK6K	3.900(99.06)	4.020(102.10)
42	FFH25401-D42S1XXXXK6K	2.000(50.80)	2.120(53.84)				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/AUG/13	PART NO. FFH25401-DXXSXXXXK6K	ITEM NO. FFH25401	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.X±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 12/AUG/13	TITLE Board to Board (Female Header) Pitch 2.54mm 180° Vertical (DIP)	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY JACOB	DATE 12/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX±.004(0.10)	.XXX±0.5'				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)