


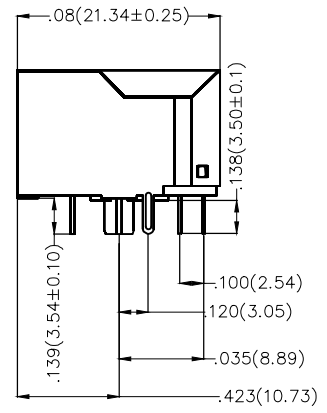


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ45105 into FRJ45046	25/MAY/18	KATE	ERIC

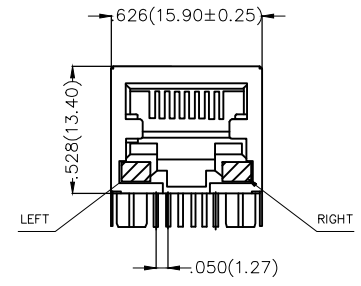


SPECIFICATIONS

Electrical Performances
 Current Rating: 1.5A AC(rms)/DC
 Voltage Rating: 125V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 1000V AC r.m.s
 Temperature Range-Operating: -40°C~+85°C
 Material and Plating
 Housing: PBT UL 94V-0
 Contact: Phosphor Bronze/Gold Plated
 Shell: Copper Alloy/Nickel Plated



Ordering Information

FRJ45 046 — 1 3 XX K6 K X 1 0 2
 1 2 3 4 5 6 7 8 9 10

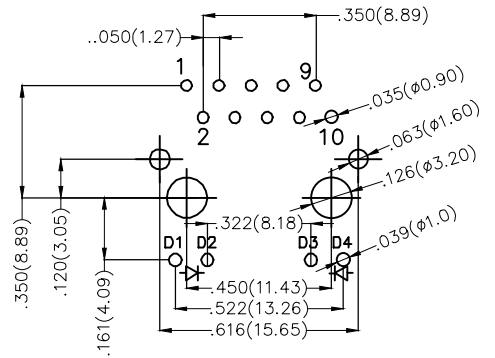


Recommended P.C.Board Layout


1 Category FRJ45-RJ45 Connector	2 Distinction No. 046	3 Ports options 1-1 Port	4 Plating 3-Selective gold in contact area, tin on tail	5 Thickness of plating 00-Gold flash 03-3μ" Custom plate available
6 Color-Resin K6-Black	7 Packaging K-Tray	8 LED style 1-L: Yellow R: Green 2-L: Green R: Yellow 3-L: Green R: Green+Orange 4-L: Orange R: Green+Orange	9 Contact type 1-Square pin	10 Pin circuits 2-1000Base-T

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. △ FRJ45046-13XXK6KX102	ITEM NO. FRJ45046	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X.±5° .X'±2° .XX'±1° .XXX'±0.5°	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE RJ45 Connectors 10P8C 90°Angle(1000Base-T)	
SCALE 5:1	SIZE A4		DRAWN BY KEVIN	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

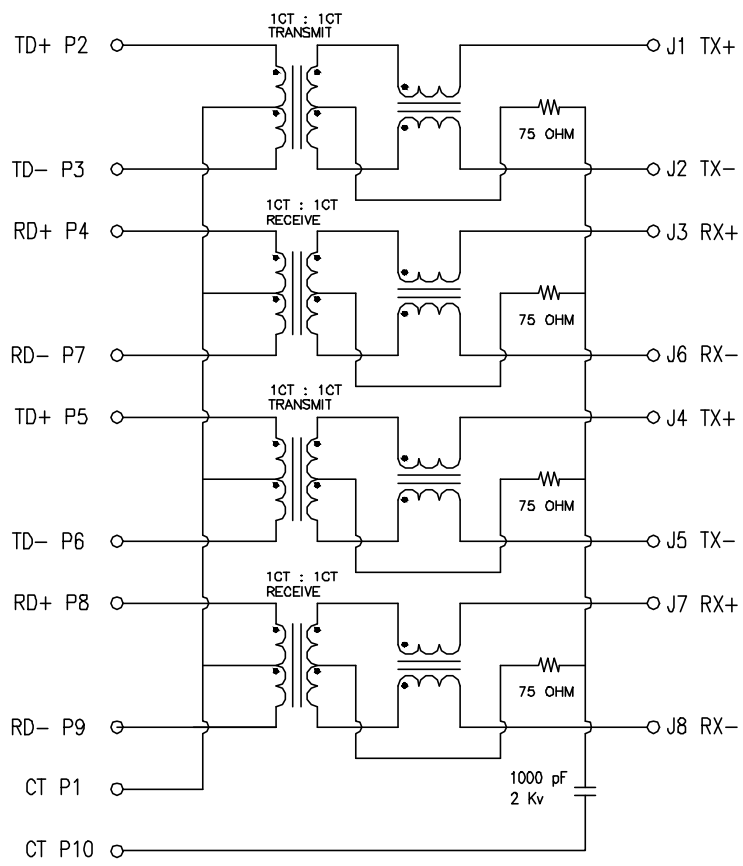

PARAMETER	SPECIFICATIONS
ELECTRICAL SPECIFICATIONS	25°C±5°C
TURNS RATIO	1CT:1CT±3%
INDUCTANCE(OCL)	350uH Min@100KHz/100mV With 8mA DC Bias
INSERTION LOSS	-1.0dB Max@1MHz-100MHz;
RETURN LOSS (Z out=100 OHM)	-16dB Min@1MHz-30MHz; -14dB Min@30MHz-60MHz; -10dB Min@60MHz-80MHz;
CROSSTALK (ADJACENT CHANNELS)	-40dB Min@1MHz-30MHz; -35dB Min@30MHz-60MHz; -30dB Min@60MHz-80MHz
COMMON MODE REJECTION RATIO	-35dB Min@1MHz-100MHz;
HI-POT	1000 V AC 2S 1mA
OCL	1000 V AC 2S 1mA
OPERATING TEMPERATURE RANGE	-40°C to +85°C

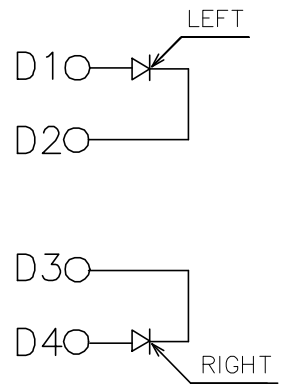

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X.±.012(0.30)	X.±5'	FRANK	18/JUN/13	FRJ45046-13XXK6KX102	FRJ45046	
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE RJ45 Connectors 10P8C 90°Angle(1000Base-T)		
	X.XX±.006(0.15)	.XX'±1'	CHERRY	18/JUN/13	REV 1	SHEET NO. 2/2	
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
			KEVIN	18/JUN/13			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[RJE231881317T](#) [MP1010RX-1000](#) [MP44RX-1000](#) [GAX-3-66](#) [GAX-8-62](#) [93606-0253](#) [GD-A-44](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-A-88](#) [GDLX-N-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-N-44M](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT2-N-1010](#) [GMX-SMT2-N-64-50](#) [GMX-SMT2-S6-88](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GRT1-BT1-5](#) [GSGX-N-2-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-30](#) [GSX-NS-88-3.05-50](#) [GSX-NS-88-3.68](#) [1-1775629-2](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [1300500326](#) [1300500227](#) [1300530003](#) [1300570002](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1400000](#) [1413176](#) [1413235](#)