
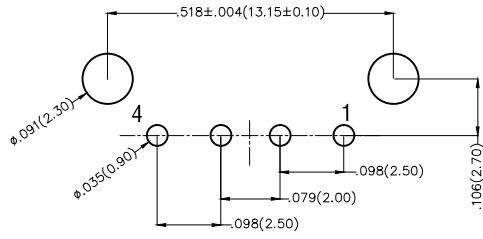
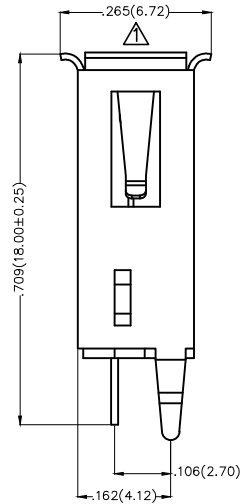
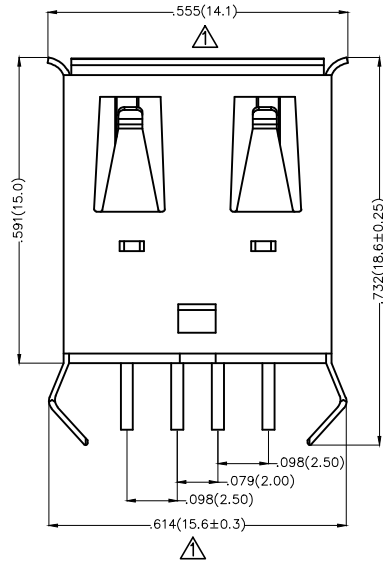


| REV | LOCATIONS | DESCRIPTION | DATE | REVISED | APPD |
|-----|-----------|-------------------|-----------|---------|------|
| 1 | △ | Dimensions change | 24/JAN/19 | KATE | ANDY |



Recommended P.C.Board Layout

Electrical

Current Rating: 1.0A AC(rms)/DC
Voltage Rating: 30V AC(rms)/DC
Contact Resistance: 30 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -40°C ~ +85°C

Material

Housing: PBT (UL 94V-0) , White
Terminal: Copper alloy
Shell: Brass

Plating

Terminal: Gold in contact area, tin on tail
Shell: Nickel plated

Pinassignment:

| Pins | Signal name |
|-------|-------------|
| PIN 1 | +5V |
| PIN 2 | DATA- |
| PIN 3 | DATA+ |
| PIN 4 | -5V |

| | | | | | | | |
|-------------------------------|--|-------------------------------------|---------------------|----------------------|---------------------------|--|------------------------|
| THIRD ANGLE PROJECTION | GENERAL TOLERANCES (UNLESS SPECIFIED) | | APPROVE BY FRANK | DATE 21/JUN/13 | PART NO. FUS205-FDSW3K | ITEM NO. FUS205 | Leader Of Industry |
| | DESIGN UNITS Inch (metric) | X.±.012(0.30) X.X±.008(0.20) | X.±5° .X±2° | CHECKED BY CHERRY | DATE 21/JUN/13 | TITLE USB A-type 4Circuits 180°Vertical Female(DIP) | |
| SCALE 5:1 | SIZE A4 | X.XX±.006(0.15) X.XXX±.004(0.10) | .XX±1° .XXX±0.5° | DRAWN BY JACOB | DATE 21/JUN/13 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | |
| | | | | | | REV 1 | SHEET NO. 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [TXGA](#) manufacturer:

Other Similar products are found below :

[10033527-N3112MLF](#) [17-210561](#) [GMCB05B11124H1EU](#) [17-200931](#) [65-647-8-BK-BU](#) [690-010-295-484](#) [73725-1191BLF](#) [950](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBB15131](#) [MUSBC111M5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#)
[896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMTAS1NBTR](#) [KUSBX-SMTBS1NBTR](#) [30-498-6](#) [SK-60A-2](#) [17-200261](#) [17-210051](#) [1734082-1](#) [FK-37-32SL](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [30-9503](#) [M9177/2-1](#) [MAB 5 S](#) [MIKROE-1451](#) [33UBBR-04SW11R](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#)
[KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SLAS1N-W30](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBC11135](#) [NK-27-32SL](#)